

ISSUE #6

June 1977

Articles

Build Your Own Interface tips from a professional Michael L. Smith	22
Computer Club Promotional Techniques when you can't afford Madison Ave. Charles Floto	30
Artillery Practice a program eliminates white sands! Herman DeMonstoy	34
Put a Micro in Your School getting started with zero bucks!	38
Torpedoes Away! submarine game for the SR-52 Charles G. Hanson	44
Build a Pulse Generator a useful hardware test aid Bob Grater, George Young	49
A TVT For Your KIM at a price you won't believe	50
The BYTEDESTROYER review of an EPROM eraser	65
BASIC Timing Comparisons information for speed freaks Tom Rugg, Phil Feldman	66
Solving Keyboard Interface Problems would you believe a UART? Peter A. Stark	72
A Clean Cassette getting the most from inexpensive recorders Lorin S. Mohler	7 6
Try a Design Console for practical hardware prototyping	78
Try Solar Energy computerized answer to the energy crisis	88
Simplified Billing System in BASIC for the small business Carl Denver Warren II	94
Kilobaud Klassroom No. 2: Gates and Flip-flops Explained	98
Computerized Typesetting an introduction to word processing Lee Wilkinson 1	06
Introducing! The World's Cheapest Computer a \$60 SC/MP Richard Hogg 1	28
My Friend is a Computer Junkie	36

Features

Publisher's Remarks2	Letters
Editor's Remarks5	Books
The BASIC Forum7	Glossary112
News of the Industry8	Corrections

CT-64 TERMINAL SYSTEM



- * 64 OR 32 CHARACTERS PER LINE
- * UPPER AND lower case LETTERS
- * FULL 8 BIT MEMORY
- * 128 CHARACTER ASCII SET
- * 110/220 Volt 50-60 Hz POWER SUPPLY
- * SCROLLING OR PAGE MODE OPERATION
- * CONTROL CHARACTER DECODING-32 COMBINATION
- * PRINTS CONTROL CHARACTERS
- * USABLE WITH ANY 8 BIT ASCII COMPUTER
- * REVERSED BACKGROUND HIGHLIGHTING

COMPLETE WITH - Chassis and cover, cursor control, 110-1200 Baud serial interface and keyboard. Optional monitor show in photo available.

Now you can buy it. The terminal that has all the features that people have been asking us to include. The CT-64 has all the functions that you could want in a terminal and they may be operated by either switches, or through a software program.

All cursor movements, home-up and erase, erase to end of line, erase to end of frame, read on, read off, cursor on, cursor off, screen reversal, scroll, no scroll, solid cursor, blinking cursor, page selection and a beeper to warn you of end of page; all are provided for your use in the CT-64.

You may also switch from upper case only teletype style operation to upper-lower case typewriter style operation. You can reverse the field on individual words to highlight them, or you can reverse the whole screen.

CT-64 is complete with keyboard, power supply serial interface and case. A matching 9 inch monitor with coordinated covers is also available to make a complete system.

CT-64 Terminal Kit

219 W. Rhapsody, San Antonio, Texas 78216

\$325.00

MM-1 Monitor (assembled)

\$175.00



219 W. Rhapsody

San Antonio, Texas 78216

☐ Enclose is \$325.00 for the CT-6	4	
☐ Send the MM-1 monitor too.	☐ Send Data	
or BAC	#	
_ or MC	Ex Date	
NAME		
ADDRESS		
CITY	STATE	ZIP

CFEMARE CSET TO THE CONTROL OF TWARE SCIFTWARE

CP/M is a low-cost computer and peripheral technology. CP/M is an advanced disk operating system designed for use with IBM-compatible diskette-based computer systems which employ the lotel 8080 microcomputer. Previously available only to OEM's, CP/M has been in existence for over three years in various manufacturers products, and has undergone extensive field testing. The functions of this software package include named dynamic files, program editing, assembly, debugging, batch processing, and instantaneous program loading, resulting in facilities similar to popular timesharing services. CP/M is an "unbundled" software package which can be easily adapted to any 8080 or Z-80 computer system with at least 16K of main memory and one or two IBM-compatible disk drives. The field-modification manual provided with CP/M has been used successfully by many CP/M users in customizing CP/M for their own hardware configurations.

Please send me the following: CP/M Documentation (C	Complete set of 6 manuals) for \$25.0	00.
CP/M Documentation ar	nd CP/M System Diskette for \$70.00.	
Free CP/M brochure and		
	high level languages and optional p gital Systems distribute CP/M with the	
	Exp. date	
Exp. date Cr		2 Madior Orlango No.
	ales tax. Amount enclosed	
Name	Address	
City	State	Zip

1 Print"Publisher's Remarks" 10 No End Page

Wayne Green

Some New Ideas

Using the Los Angeles Personal Computing show as an excuse, I made a fast trip to California and spent a few days seeing what was doing around the industry. The show came off okay, with reasonable crowds of computer hobbyists turning out to see the perhaps twenty or so exhibits. The main purpose of the show was to attract pre-hobbyists and get them enthusiastic and into the hobby. Judging from the people I met at the Kilobaud booth and in talking around the show, the pre-hobbyists did not materialize. There were plenty of dedicated hobbyists and they made the exhibiting worthwhile for everyone.

The biggest exhibit was by Computer Power and Light, where they had set up a number of training stations and were giving sample computer intro classes. The most impressive new piece of equipment, at least for me, was an IBM Selectric II complete with black box (actually, it was blue) to run from your parallel output port ... price \$1295 ... brand new. I keep an eye peeled for new hardware which will get the small business market going, and this seems to be right down that alley. These are being brought out by Microcomputer Devices.

After the show Sherry (our marketing manager), John Craig and I drove up to visit Polymorphic Systems and see their new Poly 88. They are hard at work there keeping up with business and developing some new items which are exciting... trying to have them ready to show at the Faire.

We dropped John off at his home in Lompoc and

went on to visit Cromemco, Apple, Imsai, Byte Inc., and Bill Godbout (with George Morrow coming over to join us for a fine dinner . . . it sure is lucky that Morrow and Godbout live 3000 miles away from me, otherwise none of us would get much done).

One of the problems which is concerning just about everyone in the microcomputer business is the generation of radio frequency interference (RFI) by the systems. An unshielded computer can wipe out shortwave and even television for quite a distance. The clock running at 2-4 MHz (or more) is bad enough, but then we use that to generate nice sharp square waves with harmonics on up into the VHF channels.

Both Godbout and Morrow have some new mother boards which are designed to minimize the radiation of RFI. Their designs are clever and you could do worse than take a good look at them. Cromemco seems to be the most serious about the problem, with a mother board which has a maximum of shielding of all lines and a new cabinet which resembles a Mosler safe. It even has a filter in the power line coming out the

The Cromemco mother board uses both sides of the board, with half the lines on top and half on the bottom. This leaves room for a relatively wide ground strip between every bus line. The bus lines are very narrow and this makes most of the board covered with the ground bus, thus providing good distributed capacity to hold down noise and plenty of shielding. Top and bottom bus lines are staggered so each is opposite a ground

Power Supplies

Ever since the beefs over the "inadequate" power supply which came with the first Altairs ... it seemed adequate when they started the Altair, but it didn't take hobbyists long to plug in too many boards for the first supplies, so Mits provided a heavier duty supply to cope with this ... ever since then I've wondered why manufacturers took valuable desk top space in their cabinets for a heavy and hot power supply. Ham manufacturers have for years provided external power supplies. After all, it isn't anything you ever have to get at ... you don't even need the on-off switch on it. Why not put the power supply in a separate box and run a power cable to the computer? This would make a lot more room for expanding systems ... would keep the heat down substantially ... and would make computers easier to carry around. And we do carry them around ... quite a bit ... like to the computer store for checking ... to a club meeting . . . or to visit a friend and show off.

A visit to Apple surprised me. They have done the obvious ... obvious, once you see it ... by using a transistor oscillator and running the power transformer at a much higher frequency, they have cut the size of the transformer down to about one fifth the size and weight of the monsters now showing up in other systems. The result is a supply which is small enough to put on a PC board and fits into their new molded cabinet. The Apple 2 is impressive, but I hope the fellows aren't having so much fun designing and programming their stuff that they are unable to stop somewhere along the line and get into production. It is very frustrating to both hardware and software people to have to stop, and it takes a strong minded businessman to call a halt to development and get into production. There is always

that next step which will put you way ahead of everyone else ... and will only take a couple more weeks.

The Apple 2 is expected to weigh in at around 10 pounds ... that's with keyboard built-in ... cassette I/O, etc. There is a place on the top of the flat cabinet (looks like a portable typewriter) to set the video monitor. They showed me some of their color graphics and I got a lot of good ideas from what I saw. Computer stores could get a lot of attention by running this sort of thing in their windows ... and I'll be setting up something like this in the Kilobaud van . . . how much better and more apropos than painted pictures of desert, mountains or devils which are on most vans. If any computer stores set up a demo like this in their delivery trucks or vans I sure hope they send in some pictures and info on how they did it.

Where's M&R

I tried to reach M&R (remember the Astral 2000 which got such an enthusiastic writeup in Byte?) to see how they were doing . . . no answer to my phone calls. Industry people explained that M&R had given up. That's a pity for I visited their development lab last year and was very impressed by the mechanical design of their system ... one of the best I've seen. And their software seemed to be really coming along well too. But there is a lot more to running a business than having a good product ... you also have to have more money than you think to get going ... and some shrewd brains behind advertising and promotion.

Where Are We Going?

Computer hobbyists, like hams, are split into many sub-hobbies. Some are inveterate hardware tinkerers and express themselves by building their systems from scratch . . . to hell with kits.

They rationalize this by pointing out that it is cheaper (it can be) and a lot more fun (undoubtedly)... and you for sure know what your system is doing when you design and build it yourself. With the Osborne book in hand you are well along the road to designing your own system (An Introduction to Microcomputers).

I suspect that the amount of self-discipline needed to get seriously involved in computers as a hobby will tend to limit the growth of the hobby seriously ... probably to the extent that it will never be a really big market for mass merchandisers. suspect that Heath will be disappointed in sales ... as will Radio Shack, should they venture into the field. I think this will grow about the way high fidelity did . . . slowly, with a small group of firms supplying the hobbyists.

The hobbyist is providing an important service . . . he is supporting the development of the coming small business computer . . . the coming small school computer . . . and the coming home computer. All of these will be giant industries in a few years and all will stem, I feel, from the development work going on today for a handful of computer hobbyists.

Obviously this is a golden opportunity for hobbyists. The more you know about computers, the better chance you'll have of grabbing the gold ring. The hobbyist who designs and builds his own system is putting in the groundwork which can be invaluable to him in the future. The hobbyist who goes to work for a computer store and learns to service all kinds of systems ... to interface anything and everything ... to work quickly and surely with BASIC (and later any other languages that come along), assembly and even machine language ... will be ahead of everyone else.

Working in a small store also provides training in purchasing, merchandising . . . an interface with customers of this, so why don't you write and tell me (and the readers) how you think school systems will evolve.

which is invaluable later on. You can learn bookkeeping, accounting, advertising, develop programs to handle all of the nitty gritty of the business such as invoicing, statements, inventory, profit and loss, payroll, form letters...etc. You get to learn about packaging, shipping, using the mails, trucking, insurance, banking, etc.

When you are in a position to set up your own firm you are already expected to know the above ... it is too late to start learning unless your father is very, very wealthy and can afford to subsidize your learning at great expense. It's much better to learn all of these things on someone else's money.

I'll be surprised if the first really big explosion in the micro field isn't for small business. There is an enormous market for the \$6000 computer system which will allow the small store keeper and small office to keep records and do all other business details. Since \$6000 nets out to about \$100 per month, just about any company can afford that. Hardly any can afford not to spend the \$100 a month!

How much computer can we give them for \$6000? Get out your pencil and start figuring. Can you give them a nice printer for letters, statements and invoices? How much of a mailing list will it process? Will it use disks? Tape? How about service?

If your system will enable the firm to save one salary a month, then you can sell them a pretty fair system for that price! With service that comes to about \$500 per month . . . which isn't much these days.

I see school systems as a little further down the road, but as a big market when they arrive. I see a terminal on every desk...intelligent terminals connected to a large data base and big computer for the whole school. But I have little knowledge of this, so why don't you write and tell me (and the readers) how you think school systems will evolve.

Home systems are bound to come along. They will have to be simple and probably won't go in much for home creative programming. I see them as a way to expedite mail, shop, and be entertained ... a suppliment to television. Oh yes, they'll help with home security too.

If this barrage of ideas hasn't got you itching to sit down and write, you're a tougher case than I thought. Kilobaud is here to exchange ideas...to help you learn ... and to help you help others.

What Are You Looking For?

Many prospective authors write in asking this . . . and the answer is so obvious to me that I hardly know how to answer. But I'll try . . . perhaps using some examples to get across the gestalt.

I've heard a lot about disk operating systems . . . how this one is pretty good and that one is minimal. Hmmm ... how about an article which will put this into perspective for me. I'd like to understand what a disk operating system can do ... why one is minimal and what I should look for in more sophisticated systems. I'd like to have a general idea of what I can do and can't do with the DOSs available to me from hobby computer disk manufacturers ... a comparison of the features and limitations of the Altair, Northstar, Imsai, and all the other popular systems.

Despite the Hal Walker article on cassette tapes, there is a lot more I want to know. I'd like to see a discussion of various standards of formatting on tape . . . pros and cons. Altair, KC, Digital Group, Tarbell, Apple, National Multiplex . . . and any others. How about a board which will let me I/O any of those with my computer?

Speaking of boards ... I'd like to see a relatively simple Baudot Teletype I/O board which would do it all

kilobaud

PUBLISHER Wayne Green EXECUTIVE VICE PRESIDENT EDITOR John Craig MANAGING EDITOR Kurt Schmidt ASSISTANT EDITOR Jody Wright EDITORIAL ASSISTANT PRODUCTION DEPARTMENT Manager: Lynn Panciera-Fraser Staff: Staff: Craig Brown Gayle Cabana Robert Drew Michael Murphy Weston Parker Bob Sawyer Noel R. Self Robin M. Sloan TYPESETTING Barbara J. Latti Sandy White PHOTOGRAPHY Bill Heydolph Tedd Cluff DRAFTING Bill Morello Lynn Malo ASSOCIATE EDITORS Don Alexand Tim Barry Sheila Clarke Rich Didday Phil Feldman Rich Force John Molnar Tom Rugg Peter Stark COMPTROLLER Knud E. M. Keller ASSISTANT COMPTROLLERS Marge Nielsen
Dorothy Fifield
MARKETING Sherry Smythe Sherry Dean Karen McDonough Lisa Joseph ADVERTISING Bill Edwards Gary Dozier Nancy Cluff Barbara Hann Janet Ames Lisa Healey CIRCULATION Dorothy Gibson Leslie Bailey Nancy Chandler Janette Dyer Lynn Gardner Florence Goldman Judy Main Theresa Toussaint PURCHASING Susan Brumaghim
COMPUTER DATA CONTROL Judy Waterman
Judy Brumaghim
Mary Jo Sponseller
COMPUTER SYSTEMS MANAGER C. Robert Leach
COMPUTER PROGRAMMING David E. Wilensky Richard Dykema PRINTING Michael Potter John Bianchi William Cering Dwight Perry Gary Steinbach
INVENTORY CONTROL Gary Slamin
PLANT MAINTENANCE Bill Barry Lorraine Pickering

Kilobaud is published monthly by 1001001, Inc., Peterborough NH 03458. Subscription rates in the U.S. and Canada are \$15 for one year and \$36 for three years. Outside the U.S. and Canada, please write for foreign rates. Application to mail at second class postage rate pending at Peterborough NH 03458 and additional mailing offices. Phone: 603-924-3873. Entire contents copyright 1977 by 1001001, Inc. INCLUDE OLD ADDRESS AND ZIP CODE WITH ADDRESS CHANGE NOTIFICATION.

in hardware or else use its I own up for the software operations.

Write Us a Program

Sure, our little computers are able to do all sorts of helpful things, but that doesn't stop us from having fun with them by putting in a game program ... particularly if we have some friends visiting, I'd like to see some games in BASIC submitted to KB such as a simulation of a one armed bandit ... roulette ... blackjack ... craps . . . Keno . . . Bingo . . Chuck A Luck ... Baccarat ... Faro ... Boule ... poker. How about Go? And is there much of a possibility for any serious chess

I jumped at the chance to get "Game Playing With Computers," second edition and published by Hayden. Curses, foiled again ... virtually nothing whatever in programs, just familiarization with the games involved mostly. The DEC book of 101 games is a start, but it doesn't take long to tire of Hangman, Wumpus, Grumpus, and Grilch ... and find a growing need for games which friends can play without a lot of explanation. Hamurabi is fun, but it takes a lot of practice to keep from killing a lot of innocent people. Ditto Startrek. You know, those Klingons may be basically rotten, but is that any excuse to wipe 'em out by the gross? We're not allowed to wipe out people just because they are rotten.

Let's get those programs written and send 'em in . . . and be sure to guarantee that you personally are the author of the program and that it wasn't "borrowed" from somewhere else.

I'd still like to see a comprehensive list of all of the boards available for the Altair bus . . . and the other computer systems which have interfaces to work with these boards. There are enough of these boards now so vou may need a computer to keep track of all of them ... what they do ... the prices . . . etc.

If you've I/Od to any ham gear I'd like to know what, how it works, how you did it, any programs you've written ... etc. I'm sure that some group somewhere must be experimenting with high speed Morse, generated by computer and decoded by computer . . . so let's know about it and how you solved the problems involved ... what the reactions of other hams were to the experiments . . . how much interference bothers such communications ... etc. More and more computerists are getting the itch to interconnect their systems with others and ham radio presents an excellent approach to this need ... particularly when you consider the limitations of phone lines in both bandwidth and cost.

There are a lot of things we are not looking for ... such as meandering articles with neither a hardware or software core. We'll pass up humor which is not outrageously funny . . . science fiction ... stuff like that. Creative Computing has established the type of article it wants to publish, none of which would be acceptable to Kilobaud ... and I'm sure the reverse is true. We just have different concepts of what we are trying to do. Ditto Personal Computing, which is doing a fantastic job of putting out a beautifully done magazine aimed at the prehobbyist. Ditto Byte . . . very little of the material appearing in Byte would be accepted by Kilobaud. Ditto Interface Age, which seems more aimed at the OEM market ... admittedly a much larger market and a lot more lucrative ... but not as much fun. I do try to read the other magazines with my hobbyist's hat on rather than my publisher's hat.

I want to learn as much as I can about the hows and whys of the equipment on the market ... and get as much input as I can on how other hobbyists have solved problems they've encountered. I'd like to get as

grams as I can ... know about any I/O for my SR-52 to a uC . . . and find out as much as I can about ways for hobbyists to make money out of this fantastic hobby. I think that the career possibilities are virtually unlimited and I'd like to see more written about how you got into business with your micro.

In talking with hobbyists at shows I seldom find anyone without the material for at least one good Kilobaud article ... and usually it is a problem to decide which article should come first. Most of us have done something which is of interest to others and is unique ... and that means we should write about it. We've already published data on writing for Kilobaud, but a copy of the instructions can be had for a SASE to Kilobaud ... Peterborough NH 03458.

Call For Papers

A major part of the First New England Computerfest at Boston, August 25-27th, will be the presentation of papers on microcomputing. Many of these will be published in the Computerfest Program Magazine. This will not interfere with possible reprinting of the papers in Kilobaud at a later date and the payment of regular article rates for the material.

Papers are requested from computerists and from industry sources, with the understanding that they should be prepared so as to be understandable by the average computerist rather than only by computer professionals.

It is hoped to have symposiums on all of the standards which are being proposed for microcomputers and microcomputer systems ... hardware, software and system standards. so articles are particularly solicited along these lines.

The plans are to make time available for the demonstration, with Q&A periods, of most of the commercially available microcomputer systems. This is an opportunity for manumuch in the way of pro- facturers to show their systems to a relatively large group of people at once . . . and answer their questions. It is an excellent opportunity for computerists to get the full explanation from the manufacturers on their systems. The big question in most minds is ... what system should I buy? What better chance to get the full information than attending a series of talks on demonstrated systems?

Papers are due by July 1, 1977. This will allow enough time for them to be prepared for publication in the Program Magazine. Please submit all papers to The First New England Computerfest, c/o Kilobaud, Peterborough NH 03458.

Another **Computerfest Conflict**

It looks as if there may be a conflict between the recently announced Boston Computerfest ... which they are calling the New England Computerfest (NEC-77), but which will be in the Northeast Trade Center in Woburn, one of the small towns which make up Greater Boston ... which is mostly a very large number of small towns which gradually grew together ... and the PC-77. The element of doubt is there because I've received nothing whatever from the PC-77 group to indicate that they are for real this year. There was an ad for it in one of the magazines, but we've seen a lot of shows advertised which never materialized, so I don't put much stock in magazine ads for shows anymore ... unless they are in Kilobaud.

If there is a conflict, it means manufacturers will have to choose between grubby Atlantic City, which was like a sauna last year, or Boston. Boston would seem to have several advantages ... such as the enormous concentration of computer oriented businesses in the area, which should bring in hordes of prospective hobbyists . . . the nearness of a

continued on page 20

20 Print"Editor's Remarks" 30 End Run

John Craig

Computer Stores

I don't particularly like the idea of taking a negative approach when discussing a subject. When I decided to address my impressions of the computer store situation, I gave a lot of thought to starting off with some ideas on how I think the ideal store should handle a customer. I can't do that though. The reason is there needs to be a different approach for different kinds of customers.

I had a very interesting time conducting my research. I made stops at three different computer stores down in the Southern California area and in each case I pretended to be a person interested in purchasing a personal system. At the first store I played the part of a complete novice and layman with no background in computers or electronics (I had read about home computers in several publications and was quite interested in finding out how I could put one to use). At the second store I was going to be a small businessman (about 5' tall) looking for a system, but a better situation cropped up and I didn't play that role. I walked into the third store as a typical computer hobbyist who was ready to make the plunge and buy a system.

Three stores isn't really much of a sampling, but I'll be willing to bet that most of the good and bad things I encountered can be found in the majority of stores around the country. See if you don't agree.

In looking back and trying to think of some of the good first impressions I had in the first store, I'm unable to think of any. I walked in and there was a teenager behind the counter talking on the phone. He looked just like a salesman in a computer store should look

... surfer tee shirt, blue jeans and tennis shoes! I wandered around the store and gazed upon the dusty shelves and the equipment on them ... and the dirty equipment, such as Teletypes and other terminals, on the floor. After he got off the phone I continued to walk around the store because he went over to visit with a couple of his friends who were playing a game on one of the computers. I was finally able to establish contact with the young man by catching his eye, motioning him over, and then asking him if the Teletype machine I was looking at "had a computer inside." I'm sure he must have been thinking, "Oh boy, I've really got one here." He went on to explain that the TTY was just a terminal for a computer as he led me over to a system. During that initial conversation he did ask what I intended to do with a computer. I replied that I had read some articles recently in the Wall Street Journal and Business Week about home computers and they had fired up my curiosity. I wanted to find out just what a home computer could be used for (you've heard that question before, right?). His response to that question was to load a game (naturally) from cassette to demonstrate the value of a home computer. I'm afraid I became bored with the game rather quickly (about 45 seconds) and asked him what else a home system could be used for. Then he really blew it! He proceeded to tell me that I could write my own programs to make the computer do just about anything I wanted it to. I had already established the fact that I was a total novice by asking him if the Teletype contained a computer ... plus I had told him that I with computers. "No problem," he said, "let me show you just how easy it is to write computer programs, using a language called BASIC." It turned out his objective was in fact to "show me" rather than teach me. He huddled over the video terminal for a moment while he entered several BASIC statements then stood back and said. "Watch this." The entire screen immediately filled up with numbers. He explained that he had entered some kind of a whiz-bang mathematical program. I can't remember exactly what the program was supposed to do ... but it's for sure I was supposed to be impressed by it!

had no experience at all

I explained that what I would really be interested in would be a system I could take home, plug in, load a program from the recorder and run it. He said they did have some cassettes with several games on each one. I asked him if games were the primary use for a home computer. He asked me what I wanted to use it for. I said that I had come in there to get ideas along that line ... not offer them ... because I didn't really know what it could be used for. We reached an impasse.

Next step was to go over to the magazine/book rack and ask him for a recommendation for the best magazine for me to buy. He suggested Byte! As we were stumbling through recommendations for good books for me to buy another salesman arrived on the scene. quickly put his finger on the situation (i.e., he found who he was talking to, my "background" ... and addressed himself to that particular background), and then came up with some decent book recommendations. He also made sure I didn't leave the store empty-handed ... he gave me one of their brochures to take home and look over.

Let's go back and take a closer look at this whole fiasco. To begin with, I wouldn't doubt for a moment that the young man who waited on me is

probably one of the sharpest programmers for miles around. Apparently the owner or manager of the store felt this qualified him for being a sales man! Or is it that they simply left him to "watch the place?" In either case, the big question is, why wasn't he given some training for the job?

I don't care if I owned a service station, a paint store, a hamburger joint, or a computer store; my employees would have the training to conduct my business in the manner in which it should be conducted! Notice I said "service" station. Don't see too many of those nowadays, do you? Regardless of the business, it should be a service business. And whether the employees are high school teenagers, or whatever, they can be taught how to give this service.

Most of it boils down to a lot of little things, such as, introducing yourself and asking if you can help the customer when he comes in (not 10 minutes later), taking pride in your appearance and making sure it's appropriate for the job, taking pride in the shop and dusting those shelves and equipment off once in awhile. But the biggest and most important thing is for that salesman to be able to talk (and sell) to the people coming into the store (hobbyists, laymen, small businessmen, or a guy with a Ph.D. in Computer Science). Quite often this isn't a natural ability ... but it's something that can be taught.

Knowing the equipment and other merchandise in the store is number two (and very close to one!). And if that salesperson doesn't take the time and extra effort required to learn these things then they should be told to take a walk! Being a sharp programmer or sharp hardware type isn't enough. The person should be just as familiar with the general interfacing requirements of a piece of equipment as how it should be programmed. Books and magazines are good selling items in computer stores and there's no excuse for someone not being familiar with all the magazines. Trying to read all the books might present a problem though. The answer to that "problem" is for them to read the book reviews in the magazines!

I had every intention of going into store #2 with the idea of pretending to be a small businessman looking for a microcomputer system. I had a real stroke of luck here because as I sat there waiting for the owner to finish with the customer he was with, I realized that the customer was a businessman looking for a system! They were sitting at the end of a long conference table and I was sitting at the other end waiting ... so I simply eavesdropped on the conversation! He was asking all the questions I had in mind . . . and more. He was the owner of a small book store and was looking for a system in the \$3,000 price range to take care of his inventory and accounts receivable and payable. They finally came up with a system right at three thousand which didn't include a hard-copy device.

I was very anxious to talk to this gentleman about his experience in the store so I went outside and waited for him. He came out ... I introduced myself ... and we had a very nice chat. One of the first things I asked him about was the software they had offered with the package. Seems the only thing they had to offer were the books from Scientific Research loaded with pages upon pages of listings of business programs in BASIC. I asked him if the store had any kind of an after-sales training program. He said they didn't. I've had several phone conversations with this gentleman since our first meeting and he has now visited six stores in the L.A. area in search of a system. He still hasn't found it.

As I mentioned before, I went into the third store posing as a hobbyist who was ready to make the plunge and buy a system. I liked the appearance of the

store very much (carpeting, | display cases, clean equipment, classroom area, etc.) and I enjoyed the treatment I got at the hands of the owner ... with one exception. When I started asking him about what system I should buy he did what I've come to believe is a very natural thing. He took me over and showed me a game! Arrgh!

Don't get me wrong. I like games. I think it's great the way they get kids turned onto computers. I enjoy playing them myself. But . . . there's a lot more to all of this than just games. I would dearly love to walk into a computer store and have someone demonstrate a neat educational program (or two, or three), a home accounting program, small business accounts receivable and payable, billing, inventory, music generation, voice synthesis just to name a few (and what the heck, maybe even a couple of games!).

I think the lack of lowcost business software is a sign of the times . . . it's still just a little bit too early. Undoubtedly, there are a number of people out there working on the development of this software. Probably the best bet for a computer store is to get to know some of the sharp software types in the area and work out an arrangement for the development of these programs (to the mutual benefit of all concerned ... the store, the programmer, the customer and the advancement of personal computing).

I really don't think there is any reason for all the heavy emphasis on games for demonstrations. Then where are the stores, or anyone else, going to get these other demo/applications programs? A lot of them can be taken right out of the pages of this magazine!

The lack of salesmanship training I noticed in that young man in the first store was not an isolated example. I've noticed the same situation in visits to other stores. So why am I even concerned about it? that computer store goes broke, right? Wrong. The failure of a computer store means one less place for people to go see, and discuss and buy personal systems. Every time that untrained individual turns off a prospective customer we're all losing.

Let me go back to the analogy I mentioned earlier: When I was a kid I used to work in a service station and I wasn't just a money collector like we see standing around in most gas stations today. I was a salesman and that was simply because someone took the time and effort to show me how to be one. Plus, I cared.

What's This?

I just heard something interesting. Someone was telling me how they submitted an article to one of the other magazines and they accepted it, but didn't buy it! They were told the article would be used sometime in the future "when space could be found" and that the author would be paid when it is published. Ridiculous! They don't have any claim to that manuscript whatsoever. Get it back ... send it to us ... and let's see if it belongs in KB, okay? If it does, it certainly shouldn't be sitting in some editor's file "waiting for a space."

Letters to the Editor

I really love the letters section. The feedback (good, bad, or whatever) is always interesting. Unfortunately, we only have so much space and there are a mountain of letters left over at the end of each month which I couldn't fit in. I make every effort to answer all letters and I'm just sorry there isn't more room for publishing all those we receive.

It's also very sad to get really interesting letters which are handwritten! We can't retype those letters ... no matter how good they are. And, we can't hand them to the typesetters if they're hand-It's no skin off my nose if written (period). If you've

got something of great interest that you really want to share with people through the letters section then please type it with double spacing, okay?

Midwestern Affiliation of Computer Clubs (MACC) Computerfest

Look out Cleveland! The MACC is holding their second annual computerfest there on June 10th, 11th and 12th (in the Bond Court Hotel).

The MACC is an affiliation of 13 (or more) clubs in the Midwest who seem to have a knack for getting things organized and done right. Last year's computerfest was a booming success from all the accounts I've heard. Kilobaud will have a double booth there. Drop by and see us!

For more information contact John P. Colket. MACC, PO Box 83, Brecksville OH 44141. (Hope they have some booths left!)

Looking Back - June 1975

A rather significant month for the computer hobby ist movement . . . two of the largest organizations in the country were formed and the first steps in getting the first national publication were taken.

The first meeting of the Amateur Computer Society of New Jersey was held June 13th in Scotch Plains, New Jersey. The meeting was attended by 32 people ... Sol Libes was appointed president ... and everyone had a good time. Today their organization numbers up in the hundreds ... Sol Libes is still president ... and I hope they're still having a good time (I wouldn't know ... I don't make too many of their meetings).

This month also saw the beginning of the Southern California Computer Society. The society was the brainchild of Pearce Young, a superior court judge, and Don Tarbell, a computer systems engineer. The first

continued on page 20



John Arnold/Dick Whipple

Since the last BASIC | Forum, we have received some correspondence concerning our original question - the Standardization of BASIC. Most of the comments received thus far have come from readers with wide experience in programming languages. This was to be expected, since newcomers to computing and BASIC are probably not in a position to form definite conclusions. Rather than paraphrase the various letters, we thought we would publish substantial portions of a couple of the best we received. We will reserve our comments until after you have read these reader responses.

From Sigurd Andersen, Elkton MD 21921 ... A comment on Dr. Kemeny's view of structured BASIC -I heartily disagree. I have been programming since I was 16/17 (in 1965), using a language called Intercom 500 on a Bendix G-15. Since, I've worked mainly with FORTRAN and have used APL (I love it), BASIC, some PL/I, etc. In the past few years I have learned how valuable a structured orientation is to writing good programs. A language designed to be structured makes the job much easier.

With BASIC, however, not only are there poor conditional (IF-THEN-ELSE) and limited iterative (FOR-TO ... NEXT) structures, as also occurs in FORTRAN, but also there are no (standard) ways of writing separate modules (SUBROUTINES, FUNC-TIONS) with independent, local variables and argument lists. In this instance, FORTRAN is much better than BASIC, although some versions of BASIC (of those I've used) do have limited use of argument lists.

This statement comes

after spending over 5 out of the last 12 years (on and off) as a programmer. When I look back even two or three years to the programs I wrote then and considered good, I realize how important structure is.

From James L. Larsen, American Data Services, Inc., Salt Lake City UT 84111 ... The right way to standardize BASIC (and probably the only way that could really work) is to scrap the language and start over. BASIC had its place at Dartmouth, and it taught all of us that programming can be fun, interesting, even stimulating. But, let's face it, BASIC has outlived its usefulness . . . I have taught BASIC and am familiar with several versions (including PDP-11, Univac, RTB from NYU, and HP3000), and I have found one fault common to all versions: That is that each one started with a simple language designed to teach FOR-TRANish programming methods, and then each one tried to add features to make the language more useful, but unfortunately added features can't hide the foundation which is essentially pre-1960. Now of course, the major deficiencies of BASIC could be overcome. One could add longer variable names, block structure, local variables, and procedures with parameters (and some designers are doing just that), but such additions would only add more confusion and make the new versions even less compatible with previous and current versions.

What we need to do is decide what has made BASIC so popular and then design a new language that better fulfills the needs of easy programming on small computers. My own sugges-

tions are:

- 1. The popularity of BASIC depends on the easy editing of programs, the easy debugging (because of interpretive implementations), and the low cost (because of time-sharing). Secondary factors have been the easy I/O and file handling and the fact that a small subset (like MICRO-BASIC) can be easily implemented on a small computer and still be useful.
- 2. A block structured (ALGO-like) language could easily be designed with the above features. In fact a language like PASCAL could easily become the most popular general purpose computer language (and I think better than PL/1) if it had those features.
- 3. I propose the development of such a language along these lines:
- a. It should be designed at three different levels simultaneously. A level suitable for micro implementation, one suitable for mini implementation and one suitable for the largest mainframe implementation. Each level must be upward compatible with the next level, and each level must be consistent.
- b. BASIC type I/O and file handling should be used (or something just as simple).
- c. APL type (or COBOL type) handling of structured data should be included.
- d. PASCAL/COBOL/PL/1 data structures should be available.
- e. PASCAL control structures should be used.

The highest level of this language would compare to COBOL or PL/1, and the lowest level would compare to N. Worth's PL/0 (with the addition of arrays). If such a language existed (and I belive it's possible today) computer manufacturers would be less likely to deviate from its standard form, and everyone from hobbyists to system designers would have a tool they could all understand and use.

4. The hobbyists will have to take the initiative since


systems programmers and manufacturers seem to be delighted with the present confusion and complexity of languages.


I'm not antagonistic towards BASIC; we do about 90% of our programming in HP3000 BASIC, but if we are going to talk about standardization, we should first consider if it is worthwhile to meddle with a language that is bound to be inadequate for future programming methods.

After reading these two letters, the newcomer to personal computing might question the worth of learning BASIC. While many of the points brought out are certainly valid, there is another side to the issue we think you should hear. Around the country are literally thousands of people who are quite happy with BASIC and who use it to advantage in writing programs. On the whole, they seem to be unaware they are using an inferior language.

The present quandary over BASIC's suitability as a language for computer hobbyists strikes us as more an academic question than a truly practical one. I (D. W. speaking now) am reminded of a similar situation that occurred a few years ago regarding FORTRAN. I was in the middle of my college years at the University of Houston. My very first programming course was set for the fall and was I excited! At last I would learn about those fantastic computers and get a chance to work with one. The first few weeks of the course were spent introducing the FORTRAN language, I vaguely recall a few remarks sprinkled here and there that, despite FORTRAN popularity as a scientific language in industry, it was doomed to failure because of certain inherent weaknesses. (For those with some knowledge of FOR-TRAN, two weaknesses I remember were: 1. no zero or negative array arguments and, 2. no noninteger indices in DO-LOOPs.)

continued on page 20





470B Floppy Disk from OSI.

New Products From OSI

The OSI Challenger is the first fully assembled mainframe computer which is priced competitively with hobby kits. This 8-slot tabletop unit with UL approved power supply comes equipped in its smallest configuration of serial interface, 1K RAM and PROM monitor for \$439. Video systems which do not require an expensive terminal, start at \$675.

The Challenger is now supported by thirteen accessory boards available bare, in kit form, and fully assembled. Challenger peripherals now include single and dual drive floppies, cassettes, a keyboard, and a video display unit. Software now includes as assembler, a small and a large BASIC, a disk operating system, an extended monitor, several games, and several real time analog and graphics packages.

470B Floppy Disk

The 470B is an upgrade of OSI's popular 470 floppy disk. The new disk features a GSI model 110 disk drive for 240K bytes single density storage or 480K bytes double density storage. The new disk also important ex OSI 6502 81 automatic stridling, and it r to 8 times fa 8080 BASIC. of times faste storage. The new disk also important ex OSI 6502 81 automatic stridling, and it r to 8 times fa 8080 BASIC.

features a head load indicator and a prefabricated fifty line interconnecting cable. The introductory special for the 470B is \$599 for a fully assembled drive and cable harness, 6502 disk operating system, and controller board in kit form.

The drive is also available fully assembled for OSI Challengers including matching case and power supplies for \$990. OSI's floppy disk bootstrap PROM allows the owner of any OSI system to use his floppy disk immediately on power up and is available for \$29 with either version of the 470B.

For further information contact Ohio Scientific Instruments, 11679 Hayden Street, Dept. S, Hiram OH 44234.

6502 8K BASIC

OSI's new 8K BASIC for the 6502 was written by Microsoft, the people who wrote Altair 8K BASIC for the 8080. OSI's 6502 8K BASIC is identical to this powerful and popular 8K BASIC with two very important exceptions: our OSI 6502 8K BASIC has automatic string space handling, and it runs faster. Up to 8 times faster than the 8080 BASIC. And hundreds of times faster than many 6800 BASICs

In fact, the OSI Challenger with OSI 6502 8K BASIC can actually outperform most small and medium-scale minicomputers, as well as every micro there is! And that includes the Z-80.

Perhaps even more amazing than its superlative performance is its surprisingly low price: either \$50 or free. OSI 6502 8K BASIC is available to OSI System kit-builders for \$50, on your choice of paper tape, audio cassette or floppy disk. And OSI 6502 8K BASIC comes free with the purchase of any 12K or larger OSI Challenger.

Auto-load Cassettes

A full set of software is available on cassette for use with any 6502 system equipped with OSI's 65V PROM monitor. Through the use of this monitor's load command, these cassettes automatically generate a complete operating system in the computer including CRT routines, keyboard routines, cassette I/O and the program of interest. Thus, the user simply turns the computer on and types an "L" at the keyboard - the cassette does the rest!

Programs now available include: Tiny BASIC for 4K and 8K computers, 6502 Resident Assembler, an Extended Monitor, "Life," a Graphics Editor, some games and OSI's new 6502 8K BASIC by Microsoft. Prices range from \$5 to \$50 including manuals.

New Floppy Disk For Altair-Imsai S-100 Bus

Peripherals Vision has announced a full-size floppy disk for the Altair-Imsai plug-in compatible S-100 Bus is now available with prices starting as low as \$750 for the interface card kit and assembled and tested drive. A 24 volt at 2 Amp power supply is also available in kit form for \$45 or assembled for \$65; and a cabinet is offered for an additional \$85.

The floppy disk interface card supports 8 drives and stores over 300,000 bytes per floppy. A bootstrap EPROM is included to make system startup automatic. The floppy is completely S-100 plug-in compatible, and interface cabling is included.

The floppy disk drive is from Innovex (the originator of the floppy concept) and comes assembled and tested. A disk operating system with file management system is included on the floppy. For details contact Peripheral Vision, PO Box 6267, Denver CO 80206.


Text Editing System

The new TSC Text Editing System for the 6800 microprocessor is the most extensive text editor available to the micro user. It supports many of the standard commands, such as PRINT, INSERT, DELETE, FIND, REPLACE, and



Peripheral Vision's new full-size floppy disk.

POPULARITY EXPLOSION!

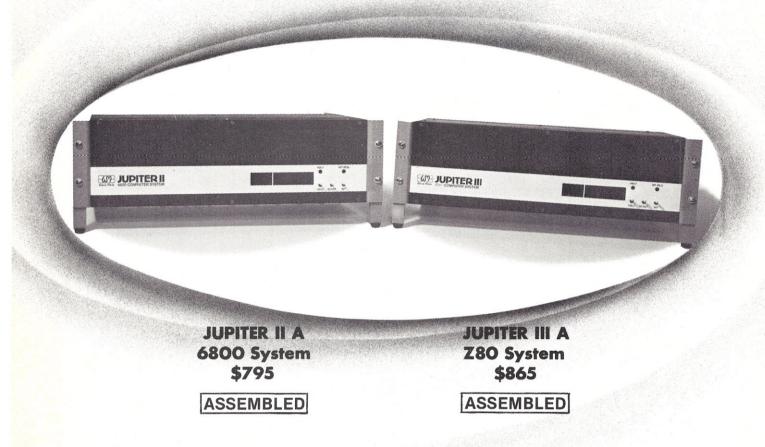

If you thought the quality of a wire-wrapped system was beyond your price range — Take a look at what we have now!

The Jupiter IIA and the Jupiter IIIA Basic computer systems. You get the system module cage with fully assembled backplane, fully assembled plug-in ferro-resonant power supply, front panel and your choice of 6800 or Z80 CPU module. All less than the price of the two best selling 8080 systems!

Plus you can choose from the fastest growing selection of memories and peripherals available from any manufacturer, like our 2KB EPROM/4KB RAM/serial RS-232 module and our new 1024 character video module. Both can transform your basic computer system into a real star.

And remember, all Wave Mate products meet the highest quality industrial standards, with rugged construction unmatched by anyone! Join the popularity explosion and get yours now! Write or call for more info and your closest Wave Mate authorized distributor.

You get your choice of microprocessors!

And you get wire-wrapped modules too!

Now you have a low cost way to get started into personal computing without sacrificing future growth capability!

Send information on:	☐ Jupiter IIA system☐ Jupiter IIIA system	
NAME		
ADDRESS		
CITY	STATE	ZIP



WAVE MATE 1015 West 190th Street, Gardena, California 90248 Dept 24 Telephone (213) 329-8941

VERIFY. Convenient pointer movers are provided for file TOP and BOTTOM, an APPEND command allowing any string to be appended to any or all lines starting in a specified column, text block COPY and MOVE are easily performed with a single command, and a very extensive CHANGE command allowing one to change any or all specified occurrence of one string into a second string.


Other features include, tab character definition, TAB column set, special character SET command, line NUMBERS on or off, and EXPAND tab character commands, easy pointer positioning using the NEXT command, a RENUMBER command, auto line numbering, STOP and LOG command, as well as a unique OVERLAY command, allowing the user to conveniently change a line by typing over an existing line.

This list is not complete, but shows the completeness of the TSC Text Editing System. As with all TSC software, a complete source listing, hex dump listing, sample output, and complete users manual are all provided. The price for all this is only \$23.50 and delivery is from stock. Order number SL68-24. For further information contact Technical Systems Consultants, Box 2574, W. Lafayette IN 47906.

World's First Megabyte Memory System

Imsai Manufacturing Corporation announces the world's first megabyte memory system for microcomputers. System modules offered at this time include: 65K, 32K and 16K RAM boards controlled by Imsai's unique Intelligent Memory Manager (IMM).

The Imsai megabyte memory system is a complete memory system for the Imsai 8080 and other Altair bus computers. It consists of the RAM-16, RAM-32 and RAM-65 dynamic memory boards



65K RAM Board from Imsai.

and intelligent memory manager (IMM) controller board. It may be implemented in a variety of configurations ranging from a single board 16K byte conventional memory to a 17-board one megabyte system with an Intelligent Memory Manager/interrupt controller. Larger multiprocessor systems may be implemented by using multiple Imsai mainframes and the Imsai Shared Memory Facility. Shared memory blocks can be up to 65K bytes and each processor can address up to one megabyte total of shared and local memory.

The RAM-16, RAM-32 and RAM-65 are 16K, 32K and 65K byte low power dynamic memory boards respectively. They may be used alone or in combination to form a conventional memory system of up to 65K bytes. With 400 ns access time and "hidden refresh," no wait states are required when accessed by the MPU. (One wait state may occasionally be required for refresh when accessed by some DMA controllers.) The address of each 16K byte block is individually selectable. Provision is included for read and write-protect and expansion to one megabyte when used with the IMM controller board.

The IMM is an Intelligent Memory Manager/interrupt controller board. It provides for memory expansion to one megabyte, write protect for each 1K block in the extended space, read protection, fully vectored interrupts, "time of day" clock and real time clock.

The memory modules are offered in both assembled and kit form. Prices are as follows: 65K RAM Board Kit \$2,599, assembled \$3,899; 32K RAM Board Kit \$749, assembled \$1,099; 16K RAM Board Kit \$449, assembled \$679; IMM ROM Control Kit \$299, assembled \$399; IMM EROM Control Kit \$499, assembled \$699.


For more information contact Michael Stone, Imsai Manufacturing Corporation, 14860 Wicks Blvd., San Leandro CA 94577.

allows simultaneous communication with a Teletype incorporating reader control, as well as any RS-232 serial device (such as a Modem or video terminal); a general purpose, 8-bit parallel port with handshaking signals accommodates such devices as an ASCII keyboard or tape reader. The board carries firmware in ½ Kbyte of p/ROM, which stores all routines needed for cassette interfacing, UART simulation, and data transfer between the microcomputer's memory and the ½ Kbyte of onboard RAM.

Buffers isolate internal data paths from the bus; onboard regulation simplifies power requirements. Available both in kit form \$120) and assembled/tested/warranted (\$165) by mail or from many computer stores. Includes documentation. Available from stock. For further information contact Morrow's Micro-Stuff, Box 6194, Albany CA 94706.

The Digital Group

An ever-growing number of software packages designed for all levels of



 ${\it Morrow's \ combined \ cassette \ interface-I/O \ board.}$

Cassette Interface — I/O Board

Fully compatible with the Altair bus and "Kansas City" standard data format, this board links your computer to three inexpensive audio cassette machines for mass memory applications (including sort and merge operations). A serial port support is being offered by the Digital Group for the company's line of microprocessor systems. For only \$5 each, they offer Tiny BASIC Extended and a cassette full of game programs. Both are on audio cassette that the Digital Group system can read. Programs can be displayed on the system's video screen. Other software programs

NO ONE PUTS THEM TOGETHER



LIKE WAVE MATE

Now Wave Mate puts them together for you — the Jupiter system, the new high performance dual floppy disk drive from PerSci and new flexible software.

Imagine what you can do with a disk drive that seeks over five times faster than the closest competitor.

Imagine what you can do with a computer system that's wire-wrapped so it can be upgraded with advancements in technology.

Imagine what you can do with a series of high level compilers so flexible that the software you write for today's hot microprocessor will run on tomorrow's.

No one but Wave Mate can put a flexible package like this together for you.

Can you imagine any reason why you should settle for less? We can! You can start smaller with the Jupiter A system without sacrificing the quality and future growth capability of your computer system and you have your choice of 6800 or Z80 processors.

Send information on:	Floppy disk syste Jupiter IIA system Jupiter IIIA syster	1
NAME		
ADDRESS		
CITY	STATE	ZIP



WAVE MATE 1015 West 190th Street, Gardena, California 90248 Dept. 22

Telephone (213) 329-8941

include six volumes of Tiny BASIC games, including Chomp, Checkers, 20 Questions, Chief and others; "Galaxy," and Z-80 packages including Educator, Assembler Dis-Assembler and Text-Editor. Prices range from \$5 to \$15.

Digital Group systems are complete and specifically designed to be easy to use. With video-based operation, all that is required is turning power on and loading a cassette.


All components are available with custom cabinets, and prices start as low as \$475 for a Z-80 based system. Details on all Digital Group products — hardware and software — are available by contacting the Digital Group, PO Box 6528, Denver CO 80206.

New Control Computer

The Imsai 8048 Control Computer, a complete control computer on an 8½ x 10" board, is based on Intel's new 8048 micro computer chip. It is the world's first single chip control computer that contains all of the following features:

- 1.8-bit CPU.
- 2. 2.5 microsecond instruction cycle, 96 instructions.3. BCD arithmetic capa-
- bility.
- 4.1K words of ROM or compatible EPROM program memory.
- 5.64 words of internal register memory.
- 6. 27 I/O lines.
- 7. Internal timer/event counter.
- 8. Oscillator and clock driver.
- 9. Reset circuit.
- 10. Interrupt circuit.
- 11. Uses single 5 volt supply.
- 12. TTL compatible.

In addition, to create a one board user programmable controller suitable for use with model railroads, energy conservation systems, ham radios, household appliances, lights, light shows, and a myriad of other applications, the fol-



Single Chip Control Computer from Imsai.

lowing system features have been added:

- 1. Cassette Interface.
- 2. Serial I/O (RS232, current loop).
- 3. 5 relays capable of handling 2 Amps at 220 volts, 3 Amps at 110 volts, or 5 Amps at 24 V dc.
- 4.1K (optional additional 1K) of user programmable program memory.
- 5. DC power supply or battery operated.

The Intel 8048/8748 microcomputer chip is designed to accommodate three separate and unique memory spaces: Program memory, Internal register memory, and External RAM (Random access memory).

The Control Computer comes in two different versions. In one version, the system monitor will be contained on the 8048 chip itself (ROM version). In the other, the system monitor will be contained on an Intel 8716 2K EROM. Both versions will contain the same 64 byte internal register RAM and 1K of external memory with space for an additional 1K of external memory.

The Control Computer provides the following functions: Enter programs into program memory; enter data into both internal and external memory; examine any memory location, internal or external; execute a user program in stand alone mode; execute a user

program with software breakpoints for debugging; save/retrieve user programs on cassette tape; save and retrieve programs from serial port; e.g., Teletype paper tape reader.

The Imsai 8048 Control Computers are offered in both assembled and kit form. The ROM version is \$249 kit and \$299 assembled. The EROM version is \$399 kit and \$499 assembled. The Five Volt Power Supply is \$99.

For more information contact Michael Stone at Imsai Manufacturing Corporation, 14860 Wicks Blvd., San Leandro CA 94577.

KIM Software Contest

1st Prize – KIM-3 8K Memory Expansion Board (value \$289).

2nd Prize - KIMROM-1 Resident Assembler/Editor ROM set (value \$150).

3rd thru 10th Prizes – KIMath Source listing and User Manual (value \$15).

The KIM programming contest is open to all KIM owners and users. All entries must contain program documentation and source code listing (hand assembled source is OK). All entries become the property of MOS Technology, Inc., and will be turned over to the KIM Users Group for possible publication. Additional prizes may be awarded for noteworthy programs by beginners.


Prizes will be awarded August 1, 1977. Entries should be sent to KIM Software Contest, MOS Technology, 950 Rittenhouse Rd., Norristown PA 19401. Entries will be judged on the basis of originality and usefulness to the user community. If external hardware is required, a schematic should be provided. Complex programs taking more than 1K of memory, such as highlevel languages, assemblers, cross-assemblers, text editors, etc., will be awarded a duplicate first prize if accompanied by working source tape or cassette. All entries must be received by July 1, 1977.

8080 Disassembler and 8080 trace Programs

Designed to run on an 8080 based machine, one program disassembles 8080 object code, producing a "source" listing in format identical to that produced by an Intel Assembler, as well as an ASCII listing of the object code and a symbol cross reference listing.

Designed as a teaching and troubleshooting aid, the other program resides in memory with the subject program, which is executed under trace control. The machine condition is displayed after each subject instruction is executed. Display includes instruction address, instruction in machine code (hexadecimal) and mnemonic, contents of all registers, and latest stack entry.

Both the Disassembler and Trace programs are available on iCOM Floppy Disk or punched paper tape in Intel Hex-ASCII object format at a cost of \$250 each, or \$400 for both. Programs are specialized to run on user's equipment and updates resulting from continuous program improvements are automatically sent to purchasers of Cybergrafix Software. For further information contact Cybergrafix, PO Box 430, Glendale CA 91206.



The Digital Group's impact matrix printer.

Full-Size Impact Matrix Printer

A full-size impact printer, designed for use with microcomputers, is an affordable printer available for computer hobbyists and the small businessman. Kit prices start at \$495 for the printer and interface card.

The printer is fast, printing 120 characters per second with 96 characters per line, 12 characters per inch horizontal and 6 lines per inch. It makes up to four copies simultaneously.

The character set and pitch are variable under software control, allowing for double width characters, different width characters within the same line, etc. The printer has a 5-by-7-inch character matrix, and the ribbon has built-in reinkers for a life of 10,000,000 characters. Paper can be either a standard 8½ inch roll, fanfold or cut page. The printer interfaces to 8-bit parallel ports.

For further information contact the Digital Group, PO Box 6528, Denver CO 80206.

New Products From IDS Frequency Counter Module

The 88-UFC is a universal 9-decade frequency and interval counter. The 88-UFC is completely

contained on one pluggable printed circuit board which is compatible with Altair/Imsai and S100 bus computers. All features and functions are software controlled making remote programming and reading possible for process control applications if the computer is equipped for data communications (such as 88-Modem).

Temperature Sensing Module

The TSM Temperature Sensing Module is a selfcontained peripheral device for use with any computer system. Interface requirements are a single TTL level parallel input bit for data transfer from the TSM to the computer and an optional TTL level parallel output bit which is used by the computer to turn the TSM on and off. The TSM may also be used with the IDS 88-UFC Frequency Counter Module in which case a parallel input bit to the computer is not required. The TSM provides measurement of frequency over the range 0 to +120 degrees farenheit (-18 C to +49 C). Resolution is better than 1 degree. Applications for the TSM include measurement of ambient inside and outside temperature for computerized climate control systems, automated weather observations, and monitoring of operating temperatures of equipment.

Digital to Analog Converter

The DAC-8 is an eight bit digital to analog converter for use with any computer system. Interface requirements are a single latch 8 bit TTL level parallel output port. The DAC-8 is designed for use in applications requiring the generation of audio frequencies between 0 and 20,000 Hz and applications requiring 8 bits of resolution for analog voltage control. Applications include speech synthesis, music synthesis, and control of voltage controlled devices (such as voltage controlled oscillators used in music synthesizers).

88-Modem Module

The 88-Modem module with auto dialer allows your computer to originate or accept data transmission to or from remote computer systems or terminals at 300-600 baud. The system is compatible with Bell type 103 data sets and can originate or accept data from these sources at 300 baud. When communicating with other 88-Modem modules rates from 0 to 300 baud are possible.

For further information contact International Data Systems, Inc., 400 N. Washington St., Suite 200, Falls Church VA 22046.

Des Moines Computerfest

The 1977 Hawkeye Ham and Computerfest, slated for August 20 and 21 under the sponsorship of the Des Moines Amateur Radio Association, will be held in Des Moines, Iowa, at Camp Dodge. Four buildings have been set aside for the fest including a theater for presentations by manufacturers of radio and computer equipment aimed at hams and electronics hobbvists.


The public is invited to attend the 8:30 am to 4:30 pm sessions each day, which we hope will be highlighted by technical talks, equipment and parts displays and a massive flea market. Other agencies with which the DMRAA works in public service projects, also have been asked to participate. There will be a communications display by the IA Army National Guard, and the Des Moines Police will have their new \$30,000 crime prevention van there as well.

For more information contact Charlie Corcoran, DMRAA, Box 88, Des Moines IA 50301.

New Orleans Computerfest

The Jefferson Amateur Radio Club and the Crescent City Computer Club would like to announce the New Orleans Hamfest/Computerfest which will be held at the Hilton Inn in Kenner LA (directly across from the New Orleans International Airport) September 24 and 25. This is the ARRL Delta Division Convention for 1977 and is the largest "Ham" outing in the deep south. This will not only be the largest Com-

continued on page 20



Frequency Counter Module from IDS.

Letters to the Editor

Computer Chess Newsletter

There is now a computer chess program available in BASIC, plus one for the 8080 plus one for the KIM. Also, 2 chess-playing machines have been announced. Each year there is a US Computer Chess Tournament, in which programs play against each other, and in some years an International Tournament. And on many campuses and elsewhere, people are writing computer chess programs.

Despite this great rise of interest in computer chess, there has been no medium of communication among devotees of computer chess. Some articles appear in the newsletter of the Special Interest Group On Artificial Intelligence of the Association For Computing Machinery, and others in a British journal, but these are not accessible to the average reader.

So, having tried to get others to do it, I decided to follow the example of Hal Singer's Micro-8 Newsletter, and start a Computer Chess Newsletter. No issues have yet appeared, and no price, size, or periodicity have yet been determined. This must depend upon the response. The content will come from the readers.

This is a plea for contributions. Write a letter. Have you ever played chess against a computer program? What machine? What program? What did you think of the program? What about the presentation of the board and moves? Could you suggest improvements? Have you ever thought of trying to write a chessplaying program? If so, how did you get started? Have you kept a record of interesting games played against a program? These are of interest to chess players.

Tutorial articles are especially needed. If you have had any experience, tell us about it. All sorts of comments, suggestions, news reports, reports on articles about computer chess — anything related is welcome.

Most computer chess programs are worked out independently. Perhaps by sharing information, comparing programs and program philosophies, etc., the state of the art could be advanced more rapidly. And certainly more interestingly.

To show that this sort of thing is not beyond the range of the computer hobbyist, the KIM program occupies only 1100 bytes! And the program of John Ford of Santa Maria, California runs on a 4K byte 8008. The program is in two parts, an opening part which then calls in the second part into memory from cassette automatically.

A number of chessplaying programs are available on computers on campuses and time-sharing systems. If you have tried them, tell us about it. Please write something for the computer chess newsletter.

Anyone interested in receiving the first issue should send a letter enclosing two 13¢ stamps to defray costs for the first try.

Doug Penrod 1445 La Cima Road Santa Barbara CA 93101

Random Criticism

The random number generator in the article "Submarine" in the February Kilobaud is technically incorrect and is no good for playing blackjack or "some serious jobs."

The author starts with a tried and proven method but he changes it and fails to warn of pitfalls so the result is wrong but the user may think his results are satisfactory.

Publishing material like this is worse than not publishing at all.

Charles C. Worstell, PHD. Auburn WA

I've been known to make mistakes... but Pete Stark? Never! By the way, don't you write for Byte Magazine, Charles? – John.

More Math!

I just finished reading Glen Charnock's letter in KB #4 p. 115 on Big Bad Math. I couldn't agree more!!! Even though I only have a rusty BS in Engineering, I'm not afraid of math. In fact I'm hungry for it. Now that I finally have a BASIC-speaking computer waiting on me, I find myself at a loss. I'm tired of playing Galaxy, Tic Tac Toe, Kingdom, Where's the Whatsit - etc. I want to put this gizmo to work. I can't find a serious problem that takes more than a few seconds to complete. Surely there are interesting, useful, and challenging math problems that are not routinely solved merely because they take too much iterative number crunching. That's just the kind I want to tackle. I even went to the local college library and borrowed some books on numerical analysis and the approximation of functions. Unfortunately, they were published when computers were called "automatic calculating machines" and they do no more than mention that certain functions can be solved by them.

I'd be extremely interested in an article or series on how to implement different equation solving schemes in BASIC.

Verlynn J. Johnson Storm Lake IA

What's A DPUG?

The acronym stands for Diablo Professional Users Group. It has been meeting at Diablo Valley College on the 4th Wednesday of each month since November.

The Professional referred to includes two categories. One, the novice in computers - who's an expert in some other field (where he makes his living). Two, the expert in computers - who can provide the answers to the first. (For you budding technical types, here's your chance to get in on the ground floor of microcomputer consulting; the novices you'll meet represent a gamut of various industries and professions. They are looking for those with practical knowhow. And in case you don't recognize yourself, you're in the consultant category even if you're a high school or college student - but have been involved in the hardware and/or software uP scene for several years.)

Meetings are held in the College library large conference room from 8-10 pm, on the 4th Wednesday of each month (March 23rd, April 27th, May 25th, etc.) DVC is near the Willow Pass exit of Freeway 680. For details write or call: Bob Hendrickson, Electronics Dept. DVC, Pleasant Hill CA 94523; (415) 687-8373.

Wm. J. Schenker, M.D. Chairman pro-tem Walnut Creek CA

Wow! What a fantastic idea! This is just the sort of thing that all the clubs and stores around the country should be getting into ... bringing the small business systems designers and developers (the hobbyists?) together with the people who are going to be buying those systems. The exchange of information between those two groups would be most interesting and mutually beneficial. — John.

PC Board For Prudhomme's Scope Mux

Just a short note about Bill Prudhomme's 8 channel scope mux, (April issue). In the schematic on page 31, it would work much nicer if pins 4 & 8 on the 555 were shown returned to +5 reg. Luckily, the PC board is OK.

Definitely count 1 interest in a CMOS version. I won't even try to build the TTL version till I see if Bill will do it in CMOS.

If there is enough interest, I will have boards available (undrilled or drilled, single-side, G-10, unplated). Cheap, too. I don't make a living doing boards, it's just a part of the hobby.

Keep the software coming – going to sit down now and learn how to sort!! (Page 34 April).

Al Klein W2PMX Miller Place NY

Dairymen and Computers

I have a question relating to a small computer applications problem. A dairy farmer friend of mine wants to keep records for his cows (about 200) feed, milk output, butter fat content, etc., and be able to call them up on a CRT in his milking barn with a graphic (for a 30 day display period). Then enter new data as he collects it while milking (milking system carosel automated). He would also like to have a hard copy printout.

Can you have someone with an Altair quote a system that would accomplish this? I have some experience with the BASIC language and could probably handle the programming.

Les Hamilton Electronics Instructor Illinois Valley Community College Oglesby IL 61348

I sincerely hope you come up with the hardware combination you're looking for, Les. And after that software is developed I'd like very much to see it because I have a very good friend who is a dairyman (and I've been telling him for years how much better things would be if he had his own computer system). Besides, it would make for a good article. — John,

Sustaining Oscillations

I found Mark Borgerson's lanswer came

A/D converter hit the nail on the head (*Kilobaud* #3). I predict the Borgerson converter will be seen in many projects to come.

I would like to propose that you change the name of Dick Whipple/John Arnold's column to "The Altair BASIC Forum" and find someone to write a regular column on BASIC with broad appeal, Perhaps ANSI X3J2 standard BASIC may be a better reference than MITS 8K.

I also notice feedback to John is so delayed, it is too far out of phase to sustain oscillation.

Richard Wright Tiffin OH

What kind of "oscillation" did you have in mind? – John.

The "Secret" Good Guys

I am about one-third of the way through the second issue of *Kilobaud* ... it takes me longer to read it than any of the other half dozen computer related magazines I get every month, because everything in it seems to teach me something.

I have had my own personal computer for nearly 18 months now, and most of the time it is on line, doing something. I must have a very good one, because in every magazine and flyer that I receive (including KB) someone is taking a cheap shot at it. Or the company that makes it. Or the lack of support that other people that bought my particular brand of micro receive. And on and

Ya know something, gentlemen? Mine works!! And I've learned quite a bit about this particular brand of micro in the process. The two problems I had with mine when I first assembled the kit were quickly and courteously solved over the phone with a \$2.70 call to the manufacturer. All my correspondence with this company has been answered within two weeks. Some of my questions were rather involved. No matter, the back in English, not computerese. Even though this company has grown quite a bit since I first purchased their "box," I still feel that they deal with me as a person and a customer rather than a purchase order number.

My micro may be out of date by 1977 standards. I am holding off buying any more goodies for mine until I see an updated CPU board and a disk system that is somewhat more up to date than the one currently offered by this particular company. (I also want to see it debugged first as well). But when this company does come out with what I am looking for, I will probably buy it from them.

You see, I have some confidence in what they sell. I feel comfortable with their products. My past experience with their products is very favorable. I like doing business with them.

Perhaps I was overcharged for their product. Perhaps I was a sucker to pay what I did for their software. After all, I was offered the same software bootleg for quite a bit less. And as I said, it can't be a very good product, I see constant criticism of it in the magazines. Yet somebody out there must feel as I do, because my brand of micro continues to sell very well, thank you. Is it possible that for all of it's bad points (and I know it has some) it is basically a good product? That works when it is assembled right? And does what it is advertised to do?

The true test of any product is in the market-place. When the dust has settled and some of the manufacturers (and computer stores) fall by the wayside, I'm betting that mine will survive. Just as I know that *Kilobaud* will. I have confidence in both products . . . my micro and *KB* (read that Wayne Green).

Anyone who wants more information can send me a letter with an SASE and I'll be glad to relate my experiences with this particular manufacturer.

M. Douglas Callihan Berkley St. RFD 1 Berkley MA 02780

Ah, you don't want to send him a letter to find out what company he's talking about! Doug really had me sitting right on the edge of your seat all the way to the end ... then he wouldn't reveal the name of the company! I thought that was pretty dirty and I wrote and told him so. He replied that he's the proud owner of a MITS Altair 8800 but he was afraid of making his letter "sound too commercial." We're all so quick to criticise ... seems we should be just as quick (and generous) with the praise. -John.

Thoughts On Software

A few comments on this new field of yours that I've gotten interested in. Namely, microprocessors. I'm a Ham and I've had a great deal of experience in electronics, including ICs, but no software at all. I guess that puts me in the same class as a lot of other would-be computer hobbyists. I'm also an author of sorts and I've sold Wayne a couple of articles. I'm working on an IC breadboard series that I think he can use. You might even hear from me if I can find the time.

How about a Hints and Kinks type feature for ideas that aren't long enough for an article but don't really belong in the letters section? Payment in books or subscription extentions might bring in a lot of small but valuable ideas.

A few thoughts on software: I'm just getting my feet wet but it seems to me that we are doing a number of things with hardware that could more easily be done in software. Maybe that is because we have more poeple who understand the equipment than we do who understand programming. I see comments that this gadget or that will save memory by handling this routine or that. Memory is

cheap and getting cheaper the processors are getting better and faster all of the time. I'm aiming for the minimum hardware that will do the job. If it will use more memory or more processor time, so what.

Speaking of speed; I read a lot about processor speed, memory wait states, and all of the things that can be done with both hardware and software to reduce the time it takes to do a given job. Right now I feel that any of the presently available micros are more than fast enough to do anything that the hobbyist requires. In other words, I feel that too much emphasis has been placed on speed for speed's

An awful lot of emphasis has also been put on software copying. This will hurt the hobbyist and the individuals or companies that might supply software for a price. The emphasis, not the copying! I own three tape recorders but I still buy commercial musical recordings. We are in the pioneering phase of microprocessors and pioneers work with what they can get. Software is expensive, easily copied, and copying is undoubtedly being done, but those who want to make money selling their software designs need to take the long view. Once the die-hard hobbiest has his machine up and computing, the market is going to peter out unless processors and programs are provided that can be used by people who have no interest in what's happening inside the box. When the non-technician needs a new program he's going to buy it, not copy it. That's where the market is and where the money will be made. That's also when prices will come way down and we'll all benefit.

Well, John, that's it for now. I received a shipping notice from Processor Technology yesterday and should soon be the proud Papa of a SOL System. I haven't seen much on it in print yet, so maybe I'll write it up for you.

Rod Hallen WA7NEV

Another "Friendly" Letter!

In the article "Number Rounding Program" in the April 1977 issue, the author states that " ... I could have simply added 0.005 and would have come up with the same end result. I have tried this in several programs and have found that it is not always reliable. I prefer to use this longer manipulation as I have had very good luck with it." I feel that ridiculous, wishywashy statements such as the above have absolutely no place in any publication devoted to computers, as one must be totally precise in dealing with computers.

In addition, the above statement is incorrect, as adding 0.005 to a number N gives the same answer as INT(N*100+.5)/100 only in the very rare case that the thousandths digit of N is 5 and all less significant digits are 0.

The program as listed will also print its messages such as "IN THIS RUN THE THOUSANDTH DIGIT OF THE NUMBER WE ROUNDED WAS A 5' regardless of the actual value of the thousandth digit typed in. This is shoddy programming, even for a program intended only for a demonstration of the rounding formula. I also think it was quite unnecessary to use nearly a page each for the program listing and sample run since the program consists almost entirely of PRINT statements.

If you continue to waste space with such totally useless articles, I will start spending my \$2 per month elsewhere. Even the most rank beginner would rather have an explanation of how a formula works and how to modify it for other applications than statements such as "I don't know how it works but I've had very good luck with it."

> Mark Hilmantel Nashua NH

Reply from Jack Inman

I am sorry that you Tombstone AZ | found my article so dis-

tasteful. I want to thank you for your letter and your interest. As a novice programmer and a "nonmathematician", I do not always know exactly where my programs have gone astray. Your letter caused me to go back and look at some of those programs where I had tried to use the .005 method. I found that I had left out some of the steps. To me this points out yet another advantage to the formula presented in the article. One formula does it

I realize that as written the program would print the same message even if the wrong number were used. The program was not intended to be a utility program that all readers would want to put in their systems. The program was designed to tell the story of how the number rounding formula works. As an author chooses his words I chose the numbers used in the run of the program to show what I wanted to show and no more.

I believe that the space for the program was a necessary part of telling the story. John obviously agrees with this or the program would not have been printed. The formula is broken down in the program in a step by step fashion.

Your last statement is a misquote for if I didn't know how the formula worked I could not have written the program to tell the story.

> Jack A. Inman Covina CA

Need An IBM 360?

Thanks again for the assistance in the subscription matter. I trust that I will be receiving my issues soon. Hate to return Mickey Ferguson's each time I borrow them.

Concerning the IBM 360 D/30, I will sell it or trade for some smaller system or peripherals or what-haveyou. It is in excellent condition. Under complete IBM maintenance until 6 weeks ago. It looks new. As best I

can tell it has all mods up to date. Also, there are a couple of sets of interface cables and all service, operation, theory of operation, and maintenance manuals with it. There are manuals for programming and even a complete parts manual with blow-outs, showing every nut and bolt. I guess that even a non-IBM type could run and maintain it with all the support material in the manuals.

Thanks again for your assistance in the subscription mess-up. If ever I can do anything for you here in the Southeast, let me know. Best of everything to you there and believe me I honestly believe KB is the BEST going. Keep up the fine work.

Don Williams Chattanooga TN

Believe it or not, folks, the "smaller system" Don is interested in swapping for that 360 is a microcomputer system worth around \$2,000! - John.

MITS BASIC Doesn't Run On Z-80


I am writing in reference to Carl Galletti's article "Will the Z-80 Crush All Competitors?" which appeared in issue #2 of Kilobaud. The article states that versions 3.4 and later of Altair BASIC will run on the Z-80. This is not the

The result of this error has been that a copy of Altair extended BASIC 4.0 was purchased by someone who had been misled by the article. Of course, when he found out that it would not run on his Z-80, he was somewhat distraught.

In addition to this incident, we have been contacted by several people asking whether the information in the article is true.

Needless to say, MITS is concerned about incorrect information that is published about our products. I would assume that you would be very concerned

continued on page 20



Build Your Own Working Robot David L. Heiserman Tab Books, Summit PA 1976, \$5.95

Ever since Forbidden Planet (remember Robbie the Robot?) I've wished for my very own robot around the house. He'd be my companion, slave, confidante, pal, and pet. So, when I spotted this little volume (228 pages) at the local Heathkit Store, I was sure my dreams had come true. A quick skimming shows the beastie that David Heiserman describes to be closer to pet than anything "useful," but as the author points out, "What use is a puppy?" The answer lies not so much in the using as in the having, and having a little robot around the house is probably lots of fun. Furthermore, it looks like building your own robot pal could develop into the biggest techno-hobby yet, combining and far outshining computers, ham radio, R/C model building, and animal training. Manufacturers take note: The clitter-clatter of little pseudo-pods around the house could mean the sound of dollars in your pocket(s).

Build Your Own Working Robot is not a true beginner's book, but if you aren't intimidated by TTL circuitry, it's not hard reading. And if you expect a "howto" book that will tell you precisely how to copy the author's robot, Buster, you won't be disappointed. But you will discover within the first few pages that, like Zen and the Art of Motorcylce Maintenance, this can be taken as several books in one.

Certainly author Heiserman will tell you more or less how Buster went together, though my guess is that if you really digest this book you'll wind up creating your own design details. More important, he takes up

the subject of rudimentary artificial intelligence: Just what should a thinking machine think about to survive? Thrown in for a good measure is no small dose of down-home R&D philosophy such as: "I can attest to the fact that you can actually drive yourself to distraction trying to devise sensor systems for detecting every conceivable type of hazard...you draw the line somewhere in order to accomplish anything at all ... even if it means that Buster will one day tumble down a flight of stairs."

Buster as grandsire to generations of home built robot rug-rats is very well planned. The author brings both him and us along by three broad development stages, each comprised of a number of systemic improvements. Buster I is a wired remote controlled mainframe incorporating the drive and steering mechanisms, only a bit more complicated than a fifty pound slot-car. Buster II has developed into a bumbling crawler who (at this stage you can't say which anymore) reacts to touch sensors, feeling his way around the house, and crying pitifully for help when he gets stuck or his batteries begin to get low. Buster III can fend for himself however. When his batteries get low, he tracks down his battery-charger nest. He will amuse himself for hours, exploring, yet respond to commands via a sophisticated accoustical link from his master. Buster IV, though not alive at the time of book publication, is seen clearly in the future. He will have microprocessor control for sure and develop an even more animal-like personality: a true pet.

Build Your Own Working Robot, at \$5.95, is a perfect introduction to Home Robotics. Practical, yet far from trivial, the groundwork for larger systems is all here. And they won't be long in arriving. Case in point: The January, 1977 issue of SCCS Interface has pictures and a quick description of a KIM-1 microprocessor controlled Buster built by Tod Loofbourrow.

More timely robot stuff: Peoples Computer Company, volume 5, #4 (Jan/ Feb 1977) has a long article by Robert Rossum called "Robots as Household Pets," which describes potential desirable attributes of home robot pets. In the same issue there is a letter from Glen R. Norris, president of the United States Robotics Society (Box 26484, Albuquerque NM 87102) describing that society's aims and plans. Looks very interesting. 1977 might be the Year of the Robot.

> Tom Scott Mill Valley CA

Artist and Computer Edited by Ruth Leavitt Harmony Books, div. Crown Publishers, Inc. Price \$4.95 Softbound

A collection of the works and comments of 35 artists and other computer types is presented in a 160 page book which includes photographic representations, some in color and most in black and white. Each contributor accompanies his or her work with a description of the work itself, the artist's philosophies, and a little background. Some of the notables presented include Ken Knowlton, John Whitney, and Ruth Leavitt, the editor of this book.

As an artist with computer graphics interests (or a computer hobbyist with an artist's interest?) I picked up the book hoping to discover how to make the Altair work with the color TV to generate graphic design. I suppose everyone has specific expectations from a book; those were mine. I read it cover to cover, but alas no one in it had used a microcomputer. Most used large systems . . . probably the smallest was a PDP-10.

Ruth Leavitt introduces

the contents with a description of the role of an artist as each sees it and comments about the relationships between artist and computer. Leavitt is a lecturer on computer art and has been involved in the process for several years. Her own work as an artist is the mobile: dynamic representations appear both in color and black and white. When she solicited articles for the book an outline of questions was included in her request of each artist. Some of the contributors answered the questions one by one, and others simply made a philosophic statement about their work. Some of the questions asked were: "How/why did you become involved with the computer (in producing art)?" "What role does the computer play for you ...?" "Do you feel artwork created with a computer has now or will have an impact on art as a whole in the future?" Questions that were not asked, I would very much have liked answers to, such as: What components went into the computer system? What steps did you take to arrive at your result? How did you begin to design programs for your work? In other words, I wanted answers to more questions regarding detail than the book covered.

One of the more interesting aspects of this book is the tremendous range of goals and the variety of ways found to achieve the artists' purposes. The artists themselves include sculpturers, graphic designers, textile weavers and filmmakers. Most of the material is written by artists, for artists . . . not for computer enthusiasts. A great deal of discussion dealt with "what is art?", a question most of us answer for ourselves, and defensive dissertations on the use of computers. However, some interesting applications might be gleaned. The most informative article regarding equipment and procedures comes from Larry Press, a university instructor in Southern California. Larry's application employed an IBM 360/44, mag tape, digitizer and line printer to reproduce photographs which are manipulated by using varying degrees of noise.

The most interesting application to me in terms of aesthetic appeal is with the use of video tape, recording electronic or laser beams, resulting in design that is fluid or which changes dynamically. Several artists represent this type of art: Ben F. Laposky produces "Oscillons"; Patsy Scala visualizes her poetry with video tape recorders and a PDP-10; Joseph Scala animates design using a PDP-10, video and film; John Whitney is well known for his filmed visuals of music; Herbert W. Franke's "graphic music" is a result of similar philosophies as Whitney's; Vicky Chaet creates beautifully flowing design on video tape.

Other applications and artistic results are widely represented. Some of the artists merely use the computer to suggest design . . . then recreate what the computer instigated, resulting in hand-finished paintings. Others make use of a line printer's ability to perfectly repeat a drawing a required number of times — something few of us have patience to do by hand.

The photographic reproductions are pleasing, or intriguing, and some downright exciting. However most of the photographs are black and white with nine in the center of the book reproduced in full color. A good deal of graphic excitement has surely been lost through lack of color.

Although Artist and Computer is less than a year old, the applications described could be considered obsolesced by the current wide use of microcomputers, at least by readers of this magazine. An updated version might now be appropriate which shows us how microcomputers can be used, describes the components of the system and the types of programming methods employed, and

prints color reproductions of the works of art. Today Artist and Computer is merely a jumping off point for what is presently possible to produce and at a fraction of the cost of systems used by artists in this book. If what you're looking for is inspiration, however, do read it.

Sheila Clarke Glendale CA

How To Buy and Use Minicomputers and Microcomputers William Barden, Jr. Howard W. Sams & Co., Inc. and Bobbs-Merrill Co., Inc.; 1976 Publication No. 21351 240 pages, \$9.95, paperback

The words "minicomputer" and "microcomputer" conjure up very specific images in the minds of most computer hobbyists. The image that springs to mind in response to "minicomputer" is probably some-thing like a full-blown PDP-11/40 with the details obscured by a big, glowing \$20,000 price tag. Because of this image, and because of Mr. Barden's repeated use of "minicomputer" in the title and chapter headings of this book, many hobbyists probably get no further than idly scanning the first few pages while browsing in their favorite computer store.

That's unfortunate since the author really doesn't concentrate that heavily on minicomputers. He tends to use "minicomputer" and "microcomputer" interchangeably, and some chapters are sufficiently general that there is no need to make the distinction. As an example, the chapter titled "Minicomputer Software" includes a discussion of the MC6800 assembler. Obviously the chapter title is a bit misleading. That is generally the case with this book.

The first seven chapters are, in fact, general digital computer technology, with the emphasis on small computers of all types. There is the usual introduction and

then a chapter on basic computer concepts; binary, octal, hex., ASCII, arithmetic operations, etc. The following chapter outlines the hardware organization typical of small computers. This chapter introduces the concepts of CPU, memory, registers and interrupts. The discussion of the various types of addressing (direct, indexed, indirect, immediate) is particularly clear.

Chapter 4 is a discussion of software. The reader is led through machine language, assemblers, compilers, loaders, and support programs such as text editors. The 6800 assembler is stressed as in BASIC. Chapter 5 is a survey of peripherals for the small computer. The author recognizes that price is the major consideration for most users and concentrates on low-cost devices. Approximate prices are given and, where applicable, there is some mention of the price for used equipment.

There is a brief and general chapter on setting up the criteria for selecting a machine and a longer but still general chapter on programming.

Only in the last two chapters do the words "minicomputer" and "microcomputer" assume their traditional meanings. Chapter 8 provides profiles of several currently popular microprocessor chips and the commercial microcomputers derived from these devices. The chips discussed are the 8008, 8080, 6800, F8 and MCS6502. This is an excellent survey of what is available to the hobbyist, although a bit behind the current state of the art in technology. The 8008, as an example, is probably no longer that important, and the Z80 has appeared since the book was published. However, the 8080 and 6800 are still dominant factors and the profiles on the machines derived from these chips are still valid.

The last chapter gives similar profiles for a variety of minicomputers. The emphasis here is on computers that are available in a

very inexpensive configuration or that may be available in the used equipment market. This slants the chapter towards the hobbyist or other budget minded users (schools, clubs, etc.) and away from the commercial user where performance is at least as important as price.

The book concludes with the usual tables, some listing of references and manufacturers, and benchmark performances for the various machines discussed in the text.

All in all the author has delivered a useful and interesting book. It can provide the interested but uncommitted reader with an objective and realistic survey of the world of small computers and some idea of the entrance fee. The reader can then make an informed decision as to whether or not this particular mania is for him. The title is less confusing when you assume the book is aimed at the uninitiated. It's only those of us who already have a full set of preconceived ideas who find it confusing.

> A. H. McDonough El Segundo CA

The Big CMOS Wall Chart
Don Lancaster
Howard W. Sams & Co.
4300 West 62nd St.
Indianapolis IN 46268
\$2.95

It has been said that time solves all problems, and it appears that a problem plaguing computerists has been rectified. The bestselling Cookbooks by Don Lancaster each contain a summary and pin-out section for the applicable logic family at the beginning of the book. These pages are invaluable to the experimenter, as they describe the characteristics of each chip as well as details about timing, clocking, and pinouts. On more than one occasion I have torn or worn out pages while flipping back and forth during a design session. That problem has been solved. Howard W. Sams, the publisher of Lancaster's latest work, CMOS Cookbook, has released a wall chart containing information about CMOS logic, exactly as presented in the Cookbook. Appropriately dubbed The Big CMOS Wall Chart, this reference can be scanned for details about a specific CMOS chip without laying down your wire-wrap tool. The 23" x 35" chart is organized by package type, thus counters are described together, common gates together, etc. Each package is described exactly as in the CMOS Cookbook. The reference also contains "use rules" and general information about CMOS design.

The wall chart is available from Sams for \$2.95. It is a must item for serious CMOS designers, and after all, it may save your CMOS Cookbook from a premature end due to a worn binding!

John Molnar Executive Editor 73 Magazine

The Basic Software Library Roger W. Brown Scientific Research Instruments Co. PO Box 2096 Ashland VA 23005 Vol. I — Business and Recreational, \$24.95 Vol. II — Engineering and Statistics, \$24.95 Vol. III - Advanced Business, \$39.95 Vol. IV — General Purpose Programs, \$9.95 Vol. V - Experimenter'sPrograms, \$9.95 Vol. VI - A Complete Business System, \$49.95

Several years ago the idea of computer "utilities" found many proponents within the computer industry. What is a Computer Utility? Like the gas, water, and electric utilities, a computer utility was conceived as a large central computing facility serving an extended geographic area via terminals in people's homes. 2001! A terminal in every home, with access to an extremely large data base consisting of hundreds of various programs for every conceivable use, and access to various raw data bases which each individual could access for whatever purpose. For instance, a user might log into the library data base to check on the availability of a particular book or document, or log into a newspaper's data base to check baseball or football statistics for the past season. Information of all types at your fingertips! Five or six of these large computer utility sites would serve the entire United States. But, although computer utility proponents are still to be found within the industry you don't hear so much about it these days, especially with the advent of the microcomputer!

Now, the prevailing theory is a computer in every home, and the microprocessor may just bring this about. But we all know that these magic boxes cannot operate without programs, without the software to make them perform. But where will all the software come from? (I remember a sign posted at the ARPAnet site I used to work at: "90% of the people don't want anything to do with programming!") Well, this is where Roger Brown and the Scientific Research Instruments Company come into the picture. R. W. Brown and Company are in the final stages of completing a 1000+ page library of programs written in the BASIC language and consisting of six volumes.

I have read other reviews of Mr. Brown's books and the one thing that keeps popping up in discussions of the merit of these volumes is the rather large amount of storage necessary to run the programs. Although it is true that some of the programs require more storage space than found on most contemporary microcomputer systems I feel that it is a rather shortsighted complaint (if that is the right word!) especially considering the decreasing prices of memory components in the semiconductor industry at present. I am sure that soon (1978) most standard hobbyist/ home/micro business computers will have sufficient memory as a system standard ... more than enough to run any of the programs in Brown's six volumes.

What kind of programs has Mr. Brown written? Well, everything from A to Z, practically! He has written games, picture generating programs, a number of statistical programs, two volumes are entirely devoted to business applications (payroll, inventory, stocks and bonds, PERT, Work Flow, etc.), mathematics, games and more games, and a number of highly specialized programs, such as calculating steel beam capacities. He has pretty well covered the spectrum.

Now here is what makes the volumes more than worth the price. Sooner or later, most likely sooner, Mr. Average Businessman is going to discover the benefits of microcomputer systems. These six volumes will do much in promoting this discovery. Every pharmacy, every stationery store, every liquor store, why, the surface hasn't even been scratched yet! All of these micro businesses and more will discover that microcomputers are within their reach, to assist them in their daily business. And then the rush will be on! Most computer stores now are discovering that anywhere from 50 to 75% of their customers have business applications in mind. I have people calling almost every day asking questions on micro systems, and most of them are concerning the availability of quality software to run them. Roger Brown's six volumes are definitely filling a void in the micro software arena.

Some of the computer stores are discovering the benefits of bundling Brown's six volumes with the systems that they sell. Systems ... complete computer systems, are undoubtedly the way of the future. And no system is complete without software!

The Altair Software Distribution Company (a MITS subsidiary) has only recently announced the availability of its "business" software packages ... but they are asking \$4000 for the package ... and that's as much as the hardware. With slight modifications Brown's programs will work on almost any hobby system going (although some of the BASICs in use are not of sufficient sophistication to derive full benefits from his programs) ... there are various people now working on his programs for systems like Polymorphic, North Star, SWTPC, and TDL BASICs.

So what are we talking about here? We are talking about a set of books that retail at \$159.70 for the entire series of six volumes (only six are planned, not seven as reported in another microcomputer magazine) ... we are talking about a set of books that can make an empty computer quite full . . . we are talking about a set of books that "daddy" can take all of the business programs out of for his micro-business system and leave the rest of the games and programs on his home system for family usage.

And, we are talking about a set of books which will very shortly be available through the Kilobaud Microcomputer Software Library on cassette tapes. Yes, that's right! Plans are now underway at Kilobaud to market "cassette" program tapes. Roger Brown's programs will be among the first tapes available, both nationally and via mail order. The exact date of availability cannot be given at this time, but suffice it to say that packaging design, quality control methods, contractual work, etc., are proceeding at a rapid rate. Yes, the Kilobaud Software Library will shortly be a reality. We also have plans to market software via another medium besides cassette. This is further down the road, but rest assured that it will be state of the art.

(Inquiries concerning programming for the Kilobaud Software Library are encouraged and should be directed to me at the Kilobaud Microcomputer | 15th. The response was Laboratory. Dealer inquiries concerning distribution rights are also encouraged.)

> **Bob Leach** Systems Manager

Microcomputer Primer Mitchell Waite and Michael Pardee Sams Publication No. 21404 1976, 180 pages, 2 appendices

This is a good book, a very good book, for the hardware oriented microcomputer novice. It draws together all the information necessary to understand the peculiar language we speak (MPU, EROM, DMA, VDM, etc.) and treats both hardware and software in clear language and diagrams, with well thought-out examples. The examples, by the way, are not tied to any particular processor (although the 6800 instruction set is used

continued on page 84



from page 13

puterfest, but it is the only Computerfest in the area.

This year's event will feature a banquet Saturday night with entertainment, two days of commercial exhibits, flea markets and forums. There will also be a hospitality room, ladies' events, FCC examinations and more.

Information on tickets, room reservations and etc., will be furnished upon request by contacting the New Orleans Hamfest/ Computerfests, PO Box 10111, Jefferson LA 70181.

20 Print"Editor's Remarks" 3D End Run

from page 6

meeting was held in the recreational room at Don's apartment building on June

overwhelming! Turned out to be standing room only with over 150 people show-

An interesting letter from Carl Helmers to the editors of the Micro-8 Newsletter (Hal Singer and yours truly) was reprinted in the June issue of the Newsletter ... "Just a page, to inform you of the demise of ECS Magazine and - like a Phoenix from it's mailing list arisen - the beginning of 'Byte'! I got a note in the mail about two weeks ago from Wayne Green, Publisher of '73 Magazine' essentially saying hello and why don't you come up and talk a bit. The net result of a follow up is the decision to create Byte Magazine using the facilities of Green Publishing, Inc."

How many magazines do we have now? I don't think I have enough fingers to count them all!



from page 7

At about the 8-week point, we put FORTRAN aside to study a language that was structurally superior to FORTRAN and likely to supplant same in the years to come. (I mean it just had to; it was so much better!) The new language was called MAD for Michigan Algorithm Decoder. I must admit that it did have lots of keen things that FORTRAN lacked. In a short time I was convinced that MAD was the only way to write programs. As time passed and my academic world gave way to the great industrial reality, a most striking thing happened. FORTRAN became the unquestioned leader among scientific languages while MAD fell into general disuse. How could such irrational behavior exist among trained professionals? It was at this point I discovered a characteristic of human behavior which I call "The Principle of Popular Momentum." Simply stated: Any idea that satisfies the following conditions: 1. a sufficient headstart, 2. popular appeal, 3. backing in powerful places, will inevitably win out even in the presence of fundamentally better ideas. If you think about it, the principle applies equally well to political movements or computer languages. FORTRAN simply satisfied the three conditions and beat out a superior language like MAD.

Here we are discussing BASIC and its relation to other languages. As clearly expressed in the letters above, BASIC suffers several inherent weaknesses; but in personal computing BASIC has Popular Momentum. Consider how it satisfies the three conditions above:

- 1. BASIC was the first high level language generally available in the personal computing field. The introduction of other, perhaps superior languages, has lagged poorly behind. Without question, BASIC got its headstart. Condition one satisfied.
- 2. BASIC is a conceptually simple language that lends itself to the conversational style of programming being used by so many computer hobbyists. Kids and adults alike take to it very readily. The average person can sit down with BASIC and write his first program in a very short time. BASIC's wide appeal is unmistakable. Condition two satisfied.
- 3. The biggest names in computing technology provide BASIC with their minicomputer systems. IBM, Hewlett-Packard, Data General, and DEC provide powerful BASIC software packages with their equipment. Even on the personal computing level, the manufacturers are breaking their necks to make "Super BASIC" available to their "Super customers. Powerful backing - of course it's there. Condition three satisfied.

No question about it -BASIC has Popular Momentum. New languages will have a mighty uphill battle no matter what their relative merits. We at BASIC Forum, while recognizing its weaknesses, want to do all we can to assist the many present and future users of BASIC. If there are ways to improve it - maybe even start an evolutionary process to change it altogether - then we want to offer a vehicle through Kilobaud for this to happen.

If you have comments, questions, or contributions, please send them along to

> **BASIC Forum** c/o Dick Whipple 305 Clemson Drive Tyler TX 75703.



from page 16

about false information finding its way into your otherwise outstanding publication. For this reason, I urge you to consult with reliable sources to insure the integrity of the information you print.

I hope you will publish this letter in order to let your readers know that Altair BASIC is not compatible with Z-80 CPU.

> Mark Chamberlin Director of Software, MITS Albuquerque NM

Thank you, Mark, I'm afraid I blew it. - John.

1 Print"Publisher's Remarks" 10 No End Run

from page 4

very major airport for fast travel to and from the show ... a large assortment of first class hotels and motels, where they will have both sheets and towels ... and even ice at no extra charge.

Boston also has a very large number of small businesses ... and NEC-77 promises to emphasize the small business aspect of microcomputers in order to start attracting this group. Add to that over twenty colleges and universities and you have a prospective smash hit. Will there be 10,000 or more jammed into the Computerfest? It could go to 20,000 considering the number of people locally who are likely to be interested.

And don't forget that there are several computer clubs in the area ... they'll be there in force. Boston is supporting quite a few computer stores ... is Atlantic City?

Frankly, I think that there should not be two computerfests set up on the same weekend, and while I'm enthusiastic about the NEC-77 and still have a lot of very bad feelings left from last year's Atlantic City PC-76, I think the organizers should have made a better effort to avoid the conflict. It's probably too late now to change either one, which is a shame because it is certain that one must diminish the other to some extent and we need all of the enhancement in our growing field we can get. I'm hoping that the industry will be able to get together and sanction computerfests as a way of avoiding things like this.

The New England Computerfest is scheduled for August 25-27th. The exhibits will be open from 3-10 pm Thursday and Friday, and from 9-9 on Saturday. An avid computerfest goer could thus get to the show on Thursday and Friday and then quickly drive to Atlantic City, which will be running on Sunday the 28th.

The idea is to give exhibitors enough time to set up the exhibits on Thursday morning ... and hold an industry meeting on Friday morning. Sundays historically do not pull very well, so this seems like a good time for exhibitors to pack up and go home. Exhibitors are the heart of any show, so the easier you can make life for them, the more you'll have . . . and the more interesting equipment you can

Atlantic City drew very few computerists on Sunday last year, so the exhibitors packed up early and pulled out. Dayton has been pulling more people on I ignore them, present them I

SOFTWARE-

All programs include: Complete assembler source listing, sample output, hex dump, sorted symbol table, plus complete instructions and thorough documentation.

Text Editing System for 6800. The best! SL68-24 \$23.50 NEW Mnemonic Assembler System for 6800. SL68-26 \$23.50

NEW Stack Oriented Arithmetic Processor (6800) SL68-25 \$10.00

NEW 8080 Klingon Capture Space game. SL80-7 \$6.50

Special Game Packages Each containing 6 programs: 8080 PD80-1 \$19.95. 6502 PD65-1 \$19.95. 6800 PD68-1 \$16.50

Complete 6800 Software Pack 16 programs. PD68-3 \$35.50

Battleship for 6800, like the board game. SL68-22 \$8.00 Space Voyage™ TSC's 6800 Star Trek game. SL68-5 \$12.00

Micro BASIC Plus The best 6800 "Tiny BASIC." SL68-19 \$15.95

Diagnostics for 6800. Very Important! SL68-23 \$10.00 Stock Market for 6800. Lots of fun! SL68-7 \$4.25

Complete Catalog of all of our programs. \$.25

Program-of-the-Month-Club™ Join the hundreds of hobbyists already enjoying this service. No obligation and no time valued cards to return. Discounts offered. One year for \$2.00

To Order: Include 3% postage, \$1.00 handling on orders under \$10.00. Indiana residents add 4% sales tax. Check your dealer!

TECHNICAL SYSTEMS CONSULTANTS BOX 2574 W. LAFAYETTE, INDIANA 47906 T12

Friday than on Sunday since they started opening on Friday. It's something to think about.

Making Clubs Work

A lot of computer clubs seem to be going the same route as a lot of ham clubs have ... downhill. That's a pity, because a club can be a very satisfying experience if it is run right.

A club is nothing more than a bunch of people with a mutual interest who get together periodically. If the meetings are dull the members will stop coming and there will be no club. That's an obvious statement, yet many club officers tend to ignore it, possibly with a notion that there is an unlimited number of club prospects, so why worry if a few people drop out.

Making club members happy isn't difficult at all ... the main way to get them enthusiastic is to pay attention to them. If you with a dull speaker or hold long business meetings, they will find more entertaining things to do on club evenings.

Most people coming to club meetings are working on their computer systems or adding to them. Every one of these people is a fountain of information on things a lot of other members would like to know about ... if you ask them. Instead of just having those attending a meeting lurch upwards for several milliseconds and grunt their names, why not have them give a report on what they've done lately . . . what problems they've had and how they solved them. If they are still unsolved, it's possible other club members might be able to help.

If you are lucky enough to have a manufacturer or a dealer in your immediate vicinity, you will have at least one interesting meeting while he demonstrates his gear and answers questions on it. Watch out for talks on

things other than hobby systems or components . . . OEM stuff and even the mini stuff will put most members to sleep ... and they will probably find it much more comfortable to sleep at home than in the chair at your meeting.

One or two member's computer systems brought to a meeting will liven things up. Everyone wants to see the latest in equipment and have a chance to get his hands on it. You won't have very many bored members if you keep them occupied with hobby systems.

Again . . . in case you've already put the word aside ... the key to a contented membership is personal attention. If you make people feel that they are wanted and of value, you won't be able to keep them away. If there is someone who is a terrible bore and you want him to stop bothering everyone, just ignore him and he'll drop

Build Your Own Interface

... tips from a professional

Mike Smith is a professional design engineer who is also an avid computer hobbyist. It always pleases me to no end to see professional hardware and software people sit down and write articles which will help the rest of us by sharing their technical expertise. Mike is no exception and he has a lot to share. I'm looking forward to this article being the first in a series on Altair bus interfacing (he's done enough designing on his home system to keep us supplied for quite awhile, too!). This first discussion deals with the Altair bus signals in general and moves into the three different types of I/O; Flag Testing, Program Interrupt, and Direct Memory Access (DMA). - John.

ne of the most interesting and rewarding areas of the personal computer hobby is that of designing and building custom interfaces. Aside from the sheer pleasure and satisfaction that comes with seeing your new design work, there is the possibility of interfacing something that has never been interfaced as well as the benefit of substantial money savings as compared to the purchase of a commercial kit or finished product.

This article deals specifically with interfacing to the Altair 8800 series of computers and applies equally to all three models (8800, 8800A, and 8800B). The first step toward successfully

interfacing any computer is a thorough understanding of the bus. The Altair Bus is a 100 line printed circuit board bus, in which all like numbered connector pins connect to one another via etched copper lines. This structure allows any interface, CPU or memory printed circuit board to be inserted into any vacant connector slot. The 8800A and 8800B come equipped with an 18-slot bus (mother board), while the 8800 is provided with a 4-slot bus with space provided for 3 additional 4-slot mother boards.

Each of the 100 lines on the Altair Bus has a predefined function which must be fully understood in order to make good use of the bus.

Table 1 contains a complete breakdown of all the Altair Bus signals, given in functional logic notation. This means that in each signal mnemonic there are two parts. The first is the signal abbreviation and the second is the active level representation. The two parts are separated by a hyphen for clarity. The active level representation is in the form of an upper case H for active high and an upper case L for active low. Functional representation does not apply to power and ground lines. To correlate the functional logic shown here to the "positive logic" symbology shown in the Altair documentation, drop the active level representation and draw a Boolean NOT sign

over the tops of these signals shown here as L. The functional notation is a far better approach because it reserves the use of the Boolean NOT symbol for use when NOT is intended. Positive logic notation, on the other hand, uses the NOT symbol every time an active low is indicated, so that every time the logical NOT function is desired, it will be confused with active low.

Let's take a look at the major groups of signals on the bus. The address lines are outputs from the CPU board and are inputs on all memory and I/O boards. The I/O boards use only the lower 8 bits (A0-H through A7-H) because during I/O transfers, the upper 8 bits are identical to the lower 8 bits. In the event that direct memory access (DMA) is used, the DMA controller must also generate an address on the address lines. In the 8800 and 8800A, these lines (through current limiting resistors) provide the drive for the Address indicators on the front panel. This seriously limits the high going drive of the 8T97 drivers on the CPU board and therefore it is suggested that each board receive the address lines using only one low power TTL or low power Schottky TTL device. In the event that a DMA controller is being designed, it is recommended that address drivers equivalent to the 8T97s on the CPU board be used.

The data-out lines are outputs from the CPU board and are inputs on all memory and I/O boards. In the event that DMA is used, the DMA controller must also drive the data-out lines when the direction of the data transfer is to the memory from the DMA controller. Assuming no more than the 18 cards that will fit in the cabinet are connected to the bus, up to 2 milliamps of low loading may occur on each board in the bus. This equates to one standard or Schottky load, 5 low power Schottky loads, or 10 low power TTL loads. A DMA

controller should drive these lines with 8T97 Tri-state buffers or equivalent.

The data-in lines are inputs to the CPU board and are driven from the memories and I/O boards. In the event that DMA is used, the DMA controller is an additional input for the data-in lines. Also, the front panel is an input for these lines. Since the front panel and CPU both use 74LS04 receivers for the data-in lines and the lines are "pulled-up" using 1k Ohm resistors at the CPU board, almost any Tri-state or open collector TTL driver may be used to drive the data-in lines from the memory and I/O boards. However, to insure optimum noise immunity and capacitive drive over the length of bus, it is recommended that the 8T97 type buffers be used to drive the data-in lines.

The status lines are sent out to the bus from the CPU board (and from the DMA controller if installed). The status lines consist of 8 lines which are selectively used by the memories and I/O boards to obtain information about the nature of the cycle. Those lines are also displayed on the front panel. The status lines are electrically of the same nature as the address lines, which means that they should be loaded by only one low power TTL or one low power Schottky TTL load per board. A DMA controller must be capable of generating these signals during a DMA transfer. These lines are SINTA-H, SWO-L, SSTACK-H, SHLTA-H, SOUT-H, SM1-H, SINP-H, and SMEMR-H.

The *processor* lines are a buffered group of inputs and outputs which are derivatives of the Intel 8080 processor signals. The 6 processor output lines are PSYNC-H, PDBIN-H, PWAIT-H, PWR-L, PHLDA-H, and PINTE-H. The DMA controller has control of these lines during a DMA transfer. The 5 input lines are PRDY-H, XRDY-H, PHOLD-L, PINT-L, and

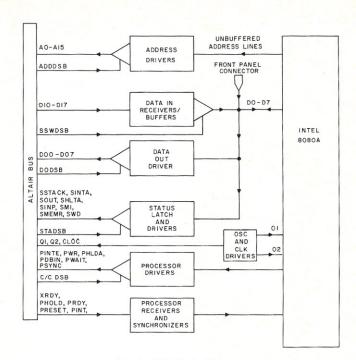


Fig. 1. CPU Block Diagram.

PRESET-L. Since some of the output signals in this group are used to drive front panel indicators, the input loading should not exceed one low power TTL or one low power Schottky TTL load per board. The input signals are all "pulled-up" using 1k Ohm resistors so that they may be driven by any Tri-state or open collector TTL gate or buffer. Although many kits (and the Altair manual itself) advocate the use of the PRDY-H line for inducing "wait" states, a much better (and electrically correct) way of doing this is to use the XRDY-H line. The front panel drives PRDY-H with a constantly enabled 8T97 which has substantial high going drive capability. To pull this line down while the front panel is pulling it high causes large instantaneous surge currents in the devices, causing unnecessary noise spikes as well as abuse to the devices themselves.

The disable group of lines is used to disable the various Tri-state drivers on the CPU board when a DMA cycle occurs. The DMA controller then becomes responsible for driving the disabled lines. There are 4 disable signals which are used with DMA.

They are STADSB-L, C/CDSB-L, ADDDSB-L, and DODSB-L. A fifth disable signal is SSWDSB-L, which has nothing to do with DMA, but instead is used to gate in the sense switches when an IN 377 (octal) instruction occurs.

The heart of the Altair 8800 system is the CPU board. A block diagram of this board is shown in Fig. 1. This block diagram is provided to give an overview of the CPU connections to the bus. All references of in and out in the Altair system are with respect to the CPU board. The bidirectional data lines of the 8080 microprocessor are split into data-in and data-out lines for use on the Altair bus. The contents of the bidirectional data lines are latched into the 8212 latch at SYNC time by the Ø1 signal. The outputs of the 8212 latch are buffered for system use by 8T97 Tri-state buffers. The processor output signals are also buffered using 8T97s and presented to the bus. The processor input signals are passed through receivers and then presented to the 8080 chip. The ready signals (PRDY-H and XRDY-H) are ANDed, synchronized with 02, sent to

//					
Pin #	Mnemonic	Description		01.001	the CPU is Halted.
			49	CLOC-L	A buffered 2 MHz clock for
1	+ 8 Volts	Unregulated power supply for			general use.
		use by +5 Volt on-board reg-	50	GND	System ground
		ulators.	51	+8 Volts	(Same as pin 1)
2	+16 Volts	Unregulated power supply for	52	-16 Volts	Unregulated negative power
		use by on-board regulators			supply for use by on-board
		(typically to obtain +12 Volts).			regulators (typically to
3	XRDY-H	A normally high line, which if			obtain -5 Volts or -12
		brought to the low state will			Volts).
		cause the CPU to enter the	53	SSWDSB-L	"Sense Switch Disable" which
		WAIT state.			is used during an IN 377
4	VIO-H	Vectored Interrupt priority 0			instruction to disable the data
5	VI1-H	Vectored Interrupt priority 1			input buffers on the CPU board
6	VI2-H	Vectored Interrupt priority 2			so that the sense switches can
7	VI3-H	Vectored Interrupt priority 3			be "read" by the CPU.
8	VI4-H	Vectored Interrupt priority 4	54	EXTCLR-L	I/O clear signal generated
9	VI5-H	Vectored Interrupt priority 5			by front panel.
10	VI6-H	Vectored Interrupt priority 6	55-67	Not Used	
11	VI7-H	Vectored Interrupt priority 7	68	MWRT-H	CPU signal indicating that the
12-17	Not Used				data on the data-out bus is to
18	STADSB-L	Causes the 8 status line buffers			be written into the memory se-
		on the CPU board to be Tri-			lected by the address lines.
		stated (enter the high imped-	69	PS-L	"Protect Status" of the select-
		ance state).			ed memory.
19	C/CDSB-L	Causes the 6 command/control	70	PROT-H	A signal which is ANDed with
13	O/ODOD-L	line buffers on the CPU board	70	1110111	"board select" on a memory
		to be Tri-stated (enter the			board to cause the PROTECT
		high impedance state).			flip-flop to be set.
20	UNPROT-H		71	RUN-H	Front panel signal indicating
20	UNFNUT-H	A signal which is ANDed with "board select" on a memory	/ 1	NON-H	that the CPU has been "told"
					to RUN.
		board to cause the PROTECT	70	DDDV II	
21	00.11	flip-flop to be cleared.	72	PRDY-H	A normally high line which if
21	SS-H	Indicates a single-step is			brought to the low state will
00	4 DDD00 1	occurring in the CPU.			cause the CPU to enter the WAIT
22	ADDDSB-L	Causes the 16 address line			state. Note: This line is
		buffers on the CPU board to			driven by a continuously enabled
		be Tri-stated (enter the high			Tri-state driver on the front
1122	1	impedance state).			panel board and contrary to what
23	DODSB-L	Causes the 8 data-out lines on			others may be doing, this line
		the CPU board to be Tri-stated			should not be used for any other
		(enter the high impedance state).			purpose. The proper line to use
24	Ø2-H	Buffered TTL compatible version			for entering wait states by
		of CPU phase 2 clock.			"slow" memories and I/O devices
25	Ø1-H	Buffered TTL compatible version			is XRDY-H (Pin 3).
		of CPU phase 1 clock.	73	PINT-L	"Interrupt Request". If Inter-
26	PHLDA-H	"Hold Acknowledge" which is the			rupts have been enabled, a low
		CPU board response to the HOLD-H			level on this line causes the
		input signal.	6.0		CPU to enter the interrupt ac-
27	PWAIT-H	CPU signal indicating a WAIT			knowledge condition at the con-
		state is occurring.			clusion of the current instruc-
28	PINTE-H	CPU signal indicating that In-			tion.
		terrupts are Enabled.	74	PHOLD-L	An input signal to the CPU
29	A5-H	Address Bit 5			which causes a HOLD state to
30	A4-H	Address Bit 4			occur. PHOLD is the requesting
31	АЗ-Н	Address Bit 3			signal for a DMA transfer.
32	A15-H	Address Bit 15	75	PRESET-L	A system reset signal used
33	A12-H	Address Bit 12			primarily by the CPU board.
34	A9-H	Address Bit 9	140		(I/O boards normally use the
35	DO1-H	Data Out (from CPU) Bit 1			EXTCLR-L signal for resetting).
36	DO0-H	Data Out (from CPU) Bit 0	76	PSYNC-H	A buffered CPU signal which in-
37	A10-H	Address Bit 10			dicates the beginning of a new
38	DO4-H	Data Out (from CPU) Bit 4			machine cycle. This signal is
39	DO5-H	Data Out (from CPU) Bit 5			used on the CPU board to enable
40	DO6-H	Data Out (from CPU) Bit 6			the loading of the system status
41	D12-H	Data In (to CPU) Bit 2			latch.
42	D13-H	Data In (to CPU) Bit 3	77	PWR-L	"Processor Write" which indicates
43	D17-H	Data In (to CPU) Bit 7	,,	T VVIII-L	that the data on the data-out
44	SM1-H	CPU status signal indicating			
		processor is in machine cycle			bus is to be written either to a
		1 which is Instruction Fetch.	78	DDDINE	memory or an I/O device.
45	SOUT-H		78	PDBIN-L	"Processor Data Bus In" is used
45	3001-11	CPU status signal indicating			to indicate to the selected
		the current cycle is an Out-			memory or I/O device that the
46	CINID II	put cycle.			CPU expects data on the data-in
46	SINP-H	CPU status signal indicating			bus.
		the current cycle is an In-	79	A0-H	Address Bit 0
47	CMEMAD	put cycle.	80	A1-H	Address Bit 1
47	SMEMR-H	CPU status signal indicating	81	A2-H	Address Bit 2
		the current cycle is a Memory	82	A6-H	Address Bit 6
40	0111 =	Read cycle.	83	A7-H	Address Bit 7
48	SHLTA-H	CPU status signal indicating	84	A8-H	Address Bit 8

85	A13-H	Address Bit 13
86	A14-H	Address Bit 14
87	A11-H	Address Bit 11
88	DO2-H	Data Out (from CPU) Bit 2
89	DO3-H	Data Out (from CPU) Bit 3
90	DO7-H	Data Out (from CPU) Bit 7
91	DI4-H	Data In (to CPU) Bit 4
92	DI5-H	Data In (to CPU) Bit 5
93	DI6-H	Data In (to CPU) Bit 6
94	DI1-H	Data In (to CPU) Bit 1
95	DIO-H	Data In (to CPU) Bit 0
96	SINTA-H	Interrupt Acknowledge signal from CPU.
97	SWO-L	CPU status signal indicating that the current cycle involves writing to a memory or I/O device.
98	SSTACK-H	CPU status signal indicating that the address bus contains the stack address and that a stack operation will occur on the current cycle.
99	POC-L	Power On Clear reset signal
100	GND	System ground

Table 1. The Altair Bus.

the 8080. PHOLD-L is also synchronized with Ø2 before being sent to the 8080. The CPU block diagram should also be of value in the event that troubleshooting the CPU becomes necessary.

Fig. 2 is a block diagram of a typical 4K byte static memory as implemented for the Altair bus. In the static memory board, the control is relatively simple, with the major effort in the area of address decoding and control signal generation. Fig. 3 shows how this might be accomplished. The methods chosen for use in Fig. 3 were chosen for simplicity and are based on readily available, inexpensive components. S1 through S4 are address selection switches, which determine the position in the address range the board will occupy. These switches are normally of the DIP-SWITCH type, but may be replaced by jumpers for economy. BOARDSEL-L will be active (low) if all 4 switches match the state of the respective address lines associated with the switches. BOARDSEL-L has several functions, which include enabling the CHIPSEL decoder which is a 7442 decoder, providing an enabling input to both the READ-L and WRITE-L gates and finally in allowing the

PROTECT flip-flop (not shown) to be changed by the PROT-L or either UNPROT-L signals. CHIPSEL decoder is connected so as to provide one of four chip selects according to the state of A10-H and A11-H. Either READ-L or WRITE-L is produced during a memory cycle based on the state of SMEMR-H, PDBIN-H, and MWRT-H lines at the time BOARDSEL-L is low. WRITE-L is used as a memory write pulse and is fed to pin 3 of all the 2102 chips on the board during a memory write cycle. Only those 2102s selected by an active (low) CHIPSEL signal will be written into. READ-L is used to enable the DATA BUS DRIVER which is composed of 8T97 buffers feeding the data-in lines. There are many ways to accomplish the address decoding other than as shown. Among these are the use of address comparator chips to produce BOARDSEL-L.

Keep in mind that the purpose of discussing the memory, CPU, and I/O interfaces is to give an insight into the Altair bus considerations for the boards, not to provide complete design details. With the information provided, it is hoped that you will be able to pick up the ball and make

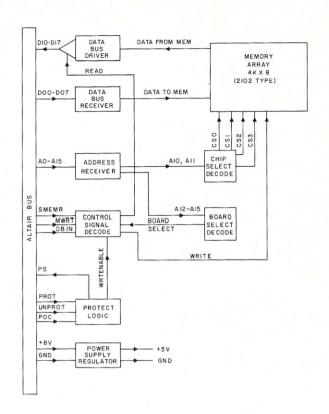


Fig. 2. 4K Static Memory Block Diagram.

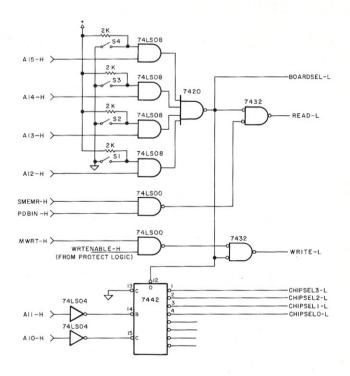


Fig. 3. Address Decoding and Control Signal Generation.

your own designs work. Also, many general designs shown in other articles may be adapted for your Altair, using the techniques in this article.

By far, the largest area open to hardware experimentation in the personal

computer system is that of I/O interfacing. If you are starting to design an I/O interface from scratch, the first order of business is the conceptual design. This first involves deciding what function the interface board will

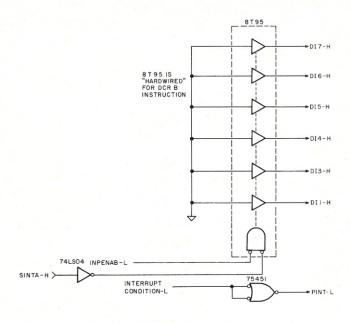


Fig. 4. Interrupt Logic.

LOOP:

IN 6 ; GET STATUS
RAL ; POSITION READY BIT IN CARRY
JNC LOOP; TRY AGAIN IF NOT READY
IN 7 ; GET THE DATA
MOV M,A ; STORE THE DATA
... ETC

Example 1.

perform. Once the function has been defined, it must then be decided how the interface will look to your software. This is the area in which most of the design trade-offs take place. This is to say, for example, if the interface is to be extremely easy to control from the program, then the hardware complexity will likely increase. Conversely, minimal hardware complexity usually results in more difficult programming. This is the real beauty of designing your own interfaces ... you make the design trade-offs to suit your own needs and tastes.

Many times it is helpful to jot down notes on the way your prospective interface will appear to the software and then make a trial subroutine using the scheme you have decided upon. If the results of your test subroutine are not pleasing to you, then rehash the conceptual design and try again. In this way, you will have a good feel for the way your interface will function before it is

built. It will also become apparent as to which way the trade-offs must be moved before trying again.

Three major operating modes for I/O interfaces are flag testing, program interrupt, and DMA (direct memory access). The most frequently used (and easiest to implement) is the flag testing method. During the conceptual design, a particular bit is designated to indicate a particular meaning such as device busy, device ready, device error, etc. The meanings such bits may assume is limited only by your imagination. Normally, these bits are read by the program from an I/O port referred to as the status register. Also, the status register is usually the lowest port number associated with a device. An example might be a paper tape reader in which the status register is port 6. The data register would then be port 7. Bit 7 would be a good selection to indicate data ready in the status register. The software would then

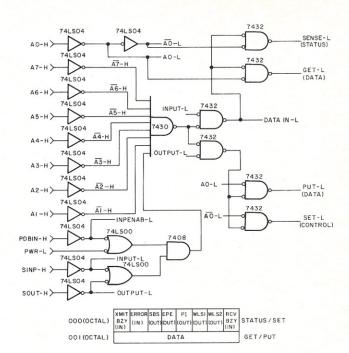


Fig. 5. Port I/O Address Decoding.

consist of a ready loop shown in Example 1. This type of I/O software is referred to as flag testing. Most devices are readily controlled in this manner. The primary shortcoming of the flag testing method is that the computer spends most of its time in the ready loop, waiting for the next data to become ready. In most personal computing situations this waiting is not a problem. If more than one process must occur simultaneously, it is possible to use program interrupt or DMA to free the processor for other processing while the I/O devices function more independently. In the case of program interrupt, the ready bit would be used to pull down the interrupt request line (PINT-L). The processor would then respond (if interrupts were enabled) with SINTA-H. The I/O interface would then use SINTA-H to gate an interrupt instruction onto the bus (see Fig. 4). The interrupt instruction is usually a restart (RST) instruction which would save the program counter on the stack and then vector to the I/O subroutine. The I/O subroutine would then process the

data and execute a RET

(return) instruction. The DMA type of operation will be discussed separately.

Another major decision to be made during conceptual design is whether standard I/O (port I/O) or memory mapped I/O addressing will be used. Each of these methods have advantages and disadvantages which must be weighed in your own mind. Port I/O has the advantage of having less address lines to decode (8) as well as leaving all 65K of the address space available for memory. It has the disadvantage of being limited to only two types of instructions in transferring data to and from the I/O device (IN, OUT). Memorymapped I/O is a method in which the I/O device is treated as if it were a memory location or group of memory locations. Memory mapped I/O has the advantage of being able to use any of the transfer instructions that are used with real memory. including arithmetic and logical as well as move instructions. The disadvantages are the need to decode more address bits (16) and the fact that part of the memory address spectrum is consumed for I/O use. An example of

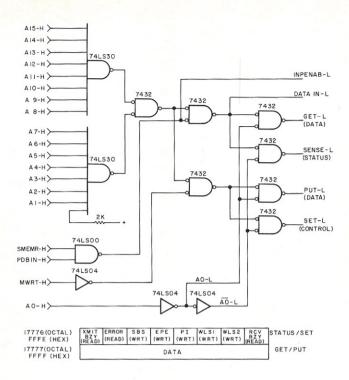


Fig. 6. Memory - Mapped I/O Address Decoding.

port I/O address decoding is shown in Fig. 5. An example of memory mapped I/O is given in Fig. 6. A bit chart with addresses is provided in each of these figures. Each is set up to perform an identical function so that you may compare the complexity of one to another.

The next step in the design of the I/O interface is the design implementation. This is the part which is referred to by many people simply as the design stage. This is the actual drawing of the logic diagram in such a way to satisfy the requirements of your conceptual design as well as the fixed requirements of the bus (referred to as bus overhead). To aid you in this area a typical I/O interface block diagram is provided in Fig. 7. Also virtually every I/O interface requires the sending of data to the CPU board. A means of performing this function is shown in Fig. 8. Fig. 8 depicts a method in which data and status are multiplexed into the data buffers. Other methods of accomplishing this include separate 8T97s for the data and the status; thus, eliminating the 74157 multiplexers.

When designing an interface which makes use of large scale integration (LSI) components, the control register, status register, and device logic are all built in to a special purpose chip. Examples of this type of chip include the UART, PIA, ACIA, Programmable Peripheral Interface, etc. These chips are very useful because they were designed for microprocessor (or minicomputer) interfacing ease and package count efficiency. When using these devices, the specifications and application notes should be studied carefully, especially in the areas of modes, operating software considerations and performance. In the specification sheets, beware of using the typical values. Instead, use the minimum and maximum values as appropriate. This will help to assure glitch-free operation of your finished interface. Since most of these LSI components are MOS (Metal oxide semiconductor) chips, careful attention must be paid to output signal loading and timing specifications. Almost without exception, these devices can drive only one TTL load and should

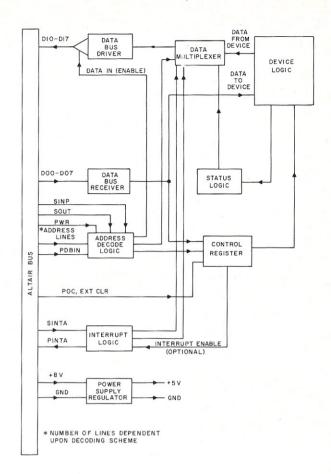


Fig. 7. Typical I/O Block Diagram.




Fig. 8. Data-In Driver/Multiplexer.

therefore be buffered. The 8080 MOS/LSI microprocessor chip itself is a good example of this fact. Notice that all output lines of the 8080 are buffered on the CPU board. Also most of these devices must be *fed* relatively wide timing pulses. In addition, some MOS/LSI devices are dynamic in nature and thus require a constant

clock of some minimum frequency. These requirements are all relatively easy to meet, but overlooking them will, in most cases, cause disappointment in the performance of your interface. While these devices are more difficult to use than standard TTL integrated circuits on a chip for chip basis, the large number of chips and the printed cir-

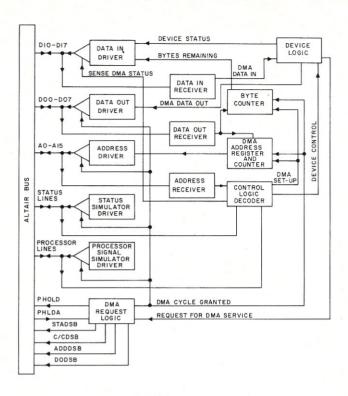


Fig. 9. DMA Block Diagram.

cuit space they replace make them very worthwhile additions to an interface design. Also, these devices use far less power than the group of TTL chips they replace. As in the handling of all MOS components, care must be taken in the handling of these devices as they are subject to damage from static charges.

Since the control register and status register are usually incorporated internally in the LSI components, the conceptual design must conform to the available control and status bits provided. In some cases, it is possible to augment the control/status of the LSI chip being used by providing additional external flag bits or status bits. An example of this would be an interrupt enabled control bit external to a 1402 UART (which has no such function internally). It is also possible in some cases to combine outputs (by using external gating) in such a way as to make the signals more useful to your unique application. In other cases, it is possible to ignore certain outputs or inputs if they are not suited to your needs. On the unused input signals, it is usually

necessary to tie the pin high or low or to another driven input. Carefully review the specifications of the device for clues as to the handling of unused inputs. It is easy to be intimidated by the maze of data and buzz words contained in many manufacturers' data sheets. Keep in mind that reading these sheets does not require a degree in engineering and that the people preparing the data sheet want you to understand it. Also, remember that data sheets do sometimes contain errors, so if in doubt, check with the manufacturer or his representative (usually given on the back of the data sheet) or check on the data from a different vendor if the part is second sourced.

As mentioned earlier, it is possible to free the processor of much of the work involved in I/O programming by using direct memory access (DMA). Fig. 9 shows the block diagram of a DMA controller. The basic operation of the controller involves setting the DMA address register to the desired starting address and the byte counter to the desired number of bytes to be transferred and then allowing

the DMA controller (independent of the CPU) to transfer an entire block of data to (or from) the device from (or to) the main memory. When each byte is transferred, the byte counter is decremented while the address counter is incremented. When the byte counter reaches a count of zero, the DMA operation is complete. The DMA transfer consists of a number of a DMA bus cycles which is equal to the number of bytes specified when setting the byte counter. Each DMA cycle is initiated by the device requesting service, which results in HOLD-L being driven low (active). This is then recognized by the CPU board which sychronizes HOLD-L and eventually suspends program activity and responds with HLDA-L. When the DMA controller receives HLDA-L, the disable signals STADSB-L C/C DSB-L, ADDDSB-L, and DODSB-L are all brought low which removes virtually all CPU influence from the bus. The DMA controller then drives the disabled signals in such a way as to make the other boards in the system (especially the memory boards) think that the CPU is talking to them. The direction of the data transfer, the memory address, and all other control functions are determined by the way these lines are driven.

Among the advantages to be gained by using the DMA facility are transfer rates which greatly exceed the maximum programmed data rate (I/O under CPU control). The number of integrated circuits required to implement DMA is rather large, which tends to discourage its use in all but the most demanding situations. In most cases, due to the large number of components involved, the device logic and the DMA logic are contained on separate boards and are interconnected externally from the bus to one another by means of jumper straps.

While not one of the more

glamorous aspects of computer interfacing, the need for proper power distribution remains ever present. The majority of the logic used in the Altair system requires the use of 5 volts which must be regulated to within 5% of nominal. The bus supplies unregulated positive voltage on pins 1 and 51 at approximately 8 volts. Each board then regulates this down to 5 volts for use on that board. The easiest way to accomplish this regulation is through the use of one of the 3-pin regulators which are available in several ratings and shapes. The two most common types are the 7805 and LM309 regulators. Most commonly, the 7805 comes in the TO-220 package while the LM309 uses the TO-3 package. Either type requires the use of an adequate heat sink as well as input and output filtering. Both types are nominally rated at 1.0 Amps. For current requirements in excess of 1.0 Amps, multiple regulators may be used, or heavier duty types may be used, such as the LM323 which is rated at 3.0 Amps. Also, it is important to bypass the regulated 5 volt line to ground at regular intervals using .01 uF ceramic capacitors. A good rule of thumb is one .01 uF capacitor for each six integrated circuits. Also, follow the manufacturer's guidelines for any special layout requirements. This is especially important in the area of analog interfacing. Don't overlook the importance of good grounding techniques when constructing your interface as deficiencies in this area sometimes show up as ghosts (erratic operation) and rarely can be found by logical means.

Interfacing is a key ingredient in making your computer perform useful functions as well as an interesting part of personal computing. Becoming skilled in the art and science of interfacing will pay many dividends in the enjoyment of this most interesting hobby.

ANNOUNCING THREE NEW BREAKTHROUGHS IN SOLDERLESS BREADBOARDING.

Whether you design or build circuits for fun or for profit, you owe it to yourself to discover how fast and easy CSC solderless breadboarding can be. Now, more than ever. Because of three new breakthroughs in breadboard design. And our new EXPERIMENTOR™ sockets**that make the most of them.


1. Price Who says a quality breadboard has to be expensive? For as little as \$9.95, CSC's EXPERIMENTOR sockets let you design, assemble and modify circuits as fast as you can push in—or pull out—component leads. On a rugged one-piece socket with 550 solderless tie-points (94 five-point terminals and two 40-point bus strips).



Sockets lock together, snap apart to handle any size circuit with ease.

But don't let the low price fool you: EXPERIMENTOR sockets are precision-molded of durable, abrasion-resistant material, and feature CSC's non-corrosive, prestressed nickel-silver contacts for positive connections and longer life. All contacts are identified, too...with molded-in designations for easier circuit assembly and diagramming.

2. Compatibility CSC EXPERIMENTOR sockets end the "big-chip blues." They're the only ones with full fan-out capabilities for microprocessors and other larger DIP's, as well as 4-16-pin units. EX-



PERIMENTOR 600's 6/10" center is ideal for microprocessor's, clock chips, RAM's, ROM's, PROM's, etc. While EXPERIMENTOR 300's smaller 3/10" center is perfect for smaller DIP's. Both units, of course, accept transistors, LED's, resistors, capacitors, pot's—virtually all types of components with plug-in ease. As well as #22-30 solid hook-up wire for interconnections. Eliminating heat and lead damage to expensive components. And saving you more money, on parts.



Mix or match both models; arrange them vertically or horizontally.

3. Flexibility With CSC EX-PERIMENTOR sockets, you can arrange your breadboard to suit your circuit...instead of vice versa. An exclusive snap-together interlocking system lets you instantly connect them. Vertically or horizontally. So you can mix or match 3/10 and 6/10" centers...expanding or contracting to meet your requirements.

CSC EXPERIMENTOR sockets can be used alone, or mounted on any convenient flat surface, thanks to molded-in mounting holes and vinyl insulation backing that prevents shorts. You can mount them with 4-40 flat-head screws from the front, or 6-32 self-tapping screws, from the rear. But however you use them, EXPERIMENTOR sockets are an unbeatable way to build and test twice the projects in half the time.



Both models feature 94 five-point terminals (vertical lines) and two 48-point bus strips (one strip shown).

WHY WAIT? CSC EXPERIMENTOR sockets are available now from your CSC dealer, or by phone from CSC, at \$9.95* for the 300 and \$10.95* for the 600. Call 203-624-3103 (East Coast) or 415-421-8872 (West Coast) — major credit cards are accepted.

*Manufacturer's suggested list price. Prices subject to change without notice. U.S. Pat. No. D235,554



44 Kendall Street, Box 1942, New Haven, Ct 06509 203-624-3103/TWX: 710-465-1227 West Coast office: Box 7809, San Francisco, CA 94119 415-421-8872/TWX: 910-372-7992 Great! Charles has got some fantastic ideas for promoting your computer club and personal computers at the county fair ... and what's really neat is that the ideas will apply to just about any computer demonstration! — John.

here can you find a better audience for microcomputers among the general public than at a county fair? People come to see new things, expect to have a good time, and are prepared to spend a little money, especially if they think they're getting a bargain.

Know Your Audience

Precisely because a fair has an image of rural simplicity, it attracts a lot of sophisticated city slickers wanting to show their kids what a horse looks like. Meanwhile the farmers will be looking around for new ways to make their businesses more profitable. Microcomputers will fit right in with other technological marvels displayed by John Deere and makers of propane toilets.

In fact the farmer probably already uses a data processing service. (A certain small systems journal once bragged of sharing a computer with the American Guernsey Cattle Club, which may explain Wayne's theory that they're full of bull.) And what victim of batch processing wouldn't like to have his own machine?

Get Started - Now

Once your club recognizes the potential benefits of having a booth at the fair, how can you make it a success both financially and in terms of gaining new members? The first step is to find out when the fairs are in your area and who is in charge. Check with the state bureau which promotes

Computer Club Promotional Techniques

tourism, the AAA, or a club member from a town where a fair is held. If someone in the club has already worked at a fair, he can be a big help. It's not too soon to begin the process now.

You want a chance to reserve a booth in a high traffic location with adequate security and electrical power. My personal favorite is opposite the amusement area, although this is not without its disadvantages. One year I found that after a full day of listening to the same music repeated every five seconds I continued to hear the tune for a half hour after leaving the fair grounds. So if you're going to be showing off computer synthesized music, you

might pick a spot near the refreshment stands. If you do want to be near the amusement area, it will be a good argument in your favor if you'll be offering video games.

Grab Their Attention

What else will you have? Before you can sign up new members for your club you need something to get their attention. A good choice would be a Cromemco TV Dazzler. Place the TV high up toward the back of the booth so the view won't be blocked. This position will often lead to better contrast, though you may have to add a simple cardboard hood to prevent stray reflections.

Another attention-getter would be a Computalker speech synthesizer imitating a carnival barker. If one of your members becomes proficient at keyboard input, the patter could be personalized for the audience present. Or have a few standard subroutines programmed that can be put into action by single keystrokes. Then you could hit T and the computer would challenge all comers to ticktacktoe. Another thing you might do is have certain sentences triggered by pressure sensors or photocells. Example: "I'll make you a deal - I won't lean on you if you don't lean on me."

About now you're probably wondering where you're

... when you can't afford Madison Ave.

going to get all this hardware. The answer is on the sign on the back wall of the booth: "Following equipment courtesy of Cooperative Computer Dealer, Inc." He'll realize his demonstrators will be seen by thousands more people at your booth than in his store.

Give Them a Bargain

Now that you've got people interested it's time to educate them and make your pitch for club membership. This is done in part by a special issue of your newsletter. While it carries the standard price in big print a sign says you're selling it for a penny during the fair. That's alright because ads for local

electronics and hobby stores paid for the printing.

So why bother to charge a penny for it? Many fair-goers pick up all the freebies they can get and never look at them again. Your advertisers will appreciate knowing they're reaching a selective audience.

What's in the newsletter? It starts with introductory articles such as "What You Can Do With a Computer" and "Why Join a Computer Club?" There's notice of a club meeting you're having in the week after the fair ends. A club membership and newsletter subscription form is included. And there is the name and address of your club.

Don't Let Them Forget You

Everything people carry away from your booth will include the name and address of your club. Biorhythm charts and pictures of Alfred E. Newman and Snoopy produced on your printer will have this typed on them. Paper tape with a message punched in it will be rubber stamped. The only exception is that when you break a dollar bill for someone you don't have to mark the change. To make up for this you'll have a large banner telling the folks who's responsible for the best show on the grounds.

Your Secret Weapon

And they haven't heard

the last from you yet. Because your club is actually giving something away (everything else you sell). Anybody who stops by is entitled to a free chance at winning a computer hobby magazine subscription. All he has to do is fill in his name and address and answer a few short questions which will allow you to judge whether he's a prospective club member.


So far you've provided a membership form in the newsletter and gotten prospects through your prize drawing. Just so nobody feels left out you'll also have a sign-up sheet.

It Gets Better

Finally you're all set to go. You arrive the first day of the fair prepared to fascinate hordes of the curious. Pretty soon you're wishing a lightning strike on the MOS chips of whoever got you into this fiasco. Unless, that is, you remember I told you things would start off slow.

The first day is the time to double-check everything and take turns looking over the other exhibits. Build up your inventory of printouts. Get out front and play a game. Out front's a good place to be anyway as you'll have more personal contact with passersby. Don't sit around doing nothing. If you look bored with your own show why should anyone else give it a second glance?

Evenings and on the weekend the crowds will increase and enough money to pay for the booth will finally dribble in. Your club exhibit will be prominently featured in TV, radio, and newspaper coverage of the fair. There will be a lot of your newsletters in circulation. The club will have some new members and lots of prospects. Next you notice you're in grave danger of making money on the project. In short, you've discovered that no computer club should miss out on the local fair.

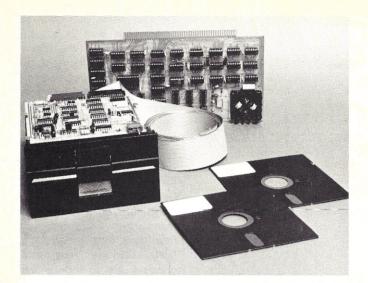

COMPLETE FLOPPY DISK SYSTEM FOR YOUR ALTAIR/IMSAI \$699

That's right, complete.

The North Star MICRO-DISK SYSTEM $^{\text{TM}}$ uses the Shugart minifloppyTM disk drive. The controller is an S-100 compatible PC board with on-board PROM for bootstrap load. It can control up to three drives, either with or without interrupts. No DMA is required.

No system is complete without software: we provide the PROM bootstrap, a file-oriented disk operating system (2k bytes), and our powerful extended BASIC with sequential and random disk file accessing (10k bytes).

Each 5" diameter diskette has 90k data byte capacity. BASIC loads in less than 2 seconds. The drive itself can be mounted inside your computer, and use your existing power supply (.9 amp at 5V and 1.6 amp at 12V max). Or, if you prefer, we offer a power supply (\$39) and enclosure (\$39).

Sound unbelievable? See the North Star MICRO-DISK SYSTEM at your local computer store. For a high-performance BASIC computing system, all you need is an 8080 or Z80 computer, 16k of memory, a terminal, and the North Star MICRO-DISK SYSTEM. For additional performance, obtain up to a factor of ten increase in BASIC execution speed by also ordering the North Star hardware Floating Point Board (FPB-A). Use of the FPB-A also saves about 1k of memory by eliminating software arithmetic routines.

Included: North Star controller kit (highest quality PC board and components, sockets for all IC's, and power regulation for one drive), SA-400 drive (assembled and tested), cabling and connectors, 2 diskettes (one containing file DOS and BASIC), complete hardware and software documentation, and U.S. shipping.

MICRO-DISK SYSTEM \$699
(ASSEMBLED) \$799
ADDITIONAL DRIVES \$425 ea.
DISKETTES \$4.50 ea.
FPB-A \$359
(ASSEMBLED)\$499

To place order, sen'd check, money order or BA or MC card # with exp. date and signature. Uncertified checks require 6 weeks processing. Calif. residents add sales tax.

N9

NORTH STAR COMPUTERS, INC. 2465 Fourth Street Berkeley, CA 94710

The Computer Store 63 S. Main St. Sunny Computer Stores 1238A S. Dixie Hwy. Microcomputer Systems 144 S. Dale Mabry Hwy. Atlanta Computer Mart 5091-B Buford Hwy.

BUY YOUR

ARIZONA Phoenix:

Tempe:

Tucson:

Orange:

San Jose:

San Jose:

Van Nuvs:

FLORIDA

GEORGIA

HAWAII

ILLINOIS

NEW JERSEY

OHIO

CONNECTICUT

CALIFORNIA

San Francisco:

FROM THESE

Phoenix Byte Shop West 12654 N. 28th Dr. Tempe Byte Shop East 813 N. Scottsdale Rd.

Byte Shop of Lawndale 16508 Hawthorne Blvd. Computer Mart of Los Angeles 625 W. Katella, No. 10 The Computer Center 8205 Ronson Rd. The Computer Store 1093 Mission St. Amoc Fleetronics

Byte Shop of Tucson 2612 E. Broadway

Amco Electronics 414 S. Bascom Ave

Byte Shop 155 Blossom Hill Rd. Computer Components 5848 Sepulveda Blvd.

COMPUCOLOR 8001

(404) 455-0647

(317) 894-3319

(313) 362-0022

(602) 942-7300 (602) 894-1129

(602) 327-4579

(213) 371-2421 (714) 633-1222

(714) 292-5302

(415) 431-0640 (408) 998-2828

(408) 226-8383

(213) 786-7411

(203) 627-0188

(305) 661-6042

(813) 879-4301

Compact Computers P.O. Box 10096 (808) 373-2751 (217) 352-5435

The Numbers Racket 518 E. Green St. Itty Bitty Machine 1316 Chicago Ave. Chicago Computer Store 157 Talcott Rd., Hwy. 62 (312) 328-6800 (312) 823-2388 Park Ridge INDIANA Indianapol

Home Computer Shop 10447 Chris Dr. MARYLAND Computer Workshop, Inc. 5709 Frederick Ave. (301) 468-0455

MASSACHUSETTS The Computer Store 120 Cambridge St. (617) 272-8770 MICHIGAN

General Computer Company 2017 Livernois MINNESOTA Cost Reduction Services 3142 Hennepin Ave. So. (612) 822-2119

MISSOURI Computer Workshop of Kansas City 6903 Blair Rd. (816) 741-5055

(201) 283-0600 The Computer Mart 501 Route 27 NEW YORK

The Computer Mart of Long Island 2070 Front St. (516) 794-0510 New York: The Computer Mart 314 5th Ave. (212) 279-1048

Columbus (614) 228-2477 Computervision 894 W. Broad St SOUTH CAROLINA

Byte Shop 2018 Greene St. (803) 771-7824

TEXAS Houston Communications Center 7231 Fondren The Micro Store 634 S. Central Expressway (713) 774-9526 (214) 231-1096

WASHINGTON Retail Computer Store 410 NE 72nd St. (206) 524-4101

WISCONSIN Beloit Austin Computers 1835 Northgate General Precision Electronics 207 Rhine St. (608) 365-6096 Watertown (414) 261-8148

Compucolor Corporation



NOW \$2750. AMERICA'S LOWEST-PRICED PERSONAL COMPUTER SYSTEM WITH COLOR VECTOR GRAPHICS.



By taking advantage of the new technologies available to the industry today, we've consistently been able to give you one of the best prices on the market. Now because of great response, we can give you the best price. You can now buy the Compucolor 8001 for the reduced price of \$2750. A complete stand-alone system with expanded graphics software for plotting points, vectors and bargraphs on a 160 x 192 addressable grid - in color. Eight independent background and foreground colors.

The Compucolor 8001 has an Intel 8080 CPU, 34 I/O ports and a color display with an effective band width of 75 MHZ compared to 5 MHZ for standard TV sets. In fact the Compucolor is the only totally integrated system on the market which includes a color display. You can also have special options for the Compucolor 8001 right now, including: Mini Disk Drives for extra memory, light pens and a variety of special keyboard features.

BASIC 8001 Is Easy To Learn. Compucolor's BASIC 8001 is

a conversational programming language which uses Englishtype statements and familiar mathematical notations. It's simple to learn and easy to use, too. Especially when it comes to intricate manipulations or expressing problems more efficiently. The BASIC 8001 Interpreter runs in ROM memory and includes 26 statement types, 18 mathematical functions, 9 string functions and 7 command types for executing, loading, saving, erasing, continuing, clearing or listing the program currently in core.

Expandable Memory To 64K. The Compucolor 8001 has 11K bytes of non-destructible readonly memory which handles the CPU and CRT operating systems as well as BASIC 8001. Sockets are in place for an additional 21K of EPROM/ MROM memory. The Random Access Main Memory has 8K bytes for screen refresh and scratch pad, 8K bytes for user workspace and room for 16K bytes of additional user workspace. The Compucolor also comes complete with a convenient mass storage device,

Floppy Tape Memory. It's an 8-track continuous loop tape system, with a Baud rate of 4800 and an extra storage capacity of up to 1024K bytes per tape.


Color Graphics At Alphanumeric Black And White Prices.

That's what we're becoming famous for, and thanks to the tremendous response to the Compucolor 8001, we've been able to reduce our price even lower—to \$2750. Look over our dealer listing on the adjacent page for the dealer nearest you. Then drop by for a demonstration. And while you're checking out the Compucolor 8001, check out your dealer's financing plan. He can help you turn a good deal into a good deal more.

Compucolor Corporation, P.O. Box 569, Norcross, Georgia 30091.

Compucolor Corporation



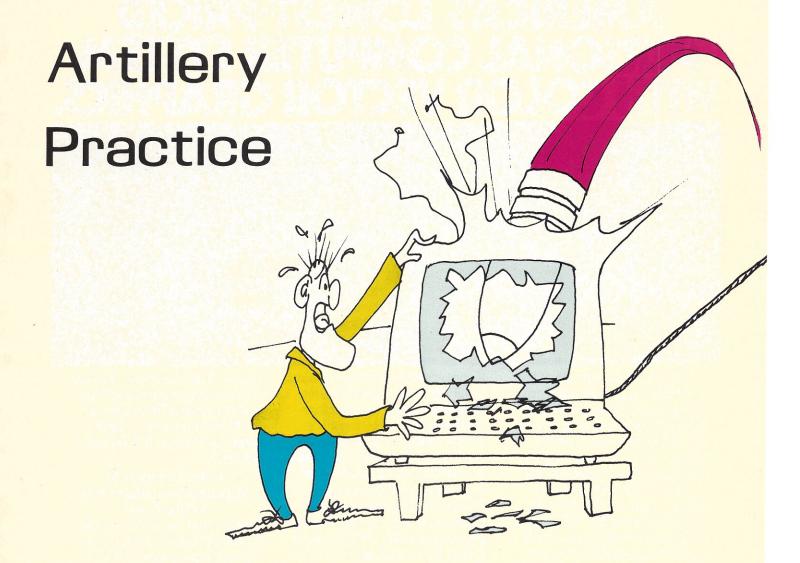

his program was written to simulate practice firing of artillery. The range covers 180 degrees from right to left, with 90 degrees straight ahead. The maximum distance you can shoot (elevation 45 degrees) is 4,650 feet. The only information you will be given is the X and Y coordinates of the target. From this you must estimate the angle to elevate the artillery and the angle to rotate it so the shot will hit the target. This simulation will fit a cannon or mortar because 15 degrees and 75 degrees will both hit the same point.

To make this more inter-


esting, it is written as a game to play with your friends (1 or 2, or up to 10 can play along with you). The computer picks the target, reports the hits, keeps score and declares the winner, but does not enter in the competition. I find there is one drawback to this type of game. Once your friends have control of the computer, they might not want to return it to you.

This program was written for the SWTP 6800 with the CT-1024 CRT terminal and 8K BASIC. At least 10K of memory is needed. A flow-chart (Fig. 1) is included for those who want to rewrite

the program. The SIN, COS, and SQR statements are needed, but the DIGITS is not. Without DIGITS, the use of ABS in all calculations should make all lists in feet. This should be plenty good enough.

The use of the CRT terminal forces the use of short (32 character) lines and the use of HOME UP and ERASE EOL cursor controls. There are 5 PRINT ""; statements in the listing, and all contain the commands for a new frame in the quotation marks. The subroutine at 2100 is designed to hold a frame on the CRT until ready

Herman DeMonstoy 2 Pioneer Rd. Painted Post NY 14870

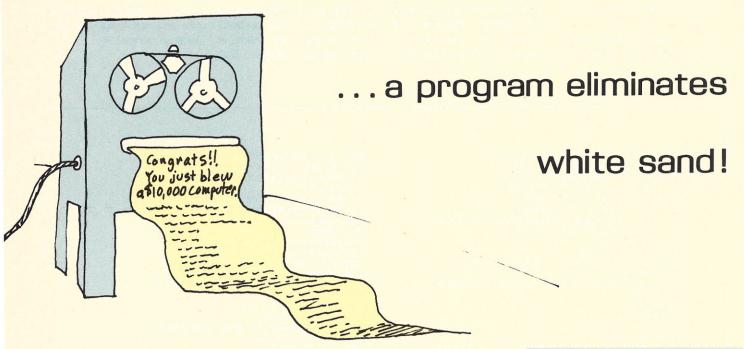

THIS IS A TARGET PRACTICE GAME INSTRUCTIONS? YES

THE ELEVATION LOOKS LIKE THIS.

* * * YOU / * *

ELEVATION

TARGET

AN ELEVATION FROM 0 TO 45 WILL INCREASE THE DISTANCE, BUT BEYOND 45 THE DISTANCE WILL GET SHORTER UP TO 90, WHEN IT WILL GO STRAIT UP AND BACK ON YOU

HIT 'CR' TO CONTINUE?

ARTILLERY RANGE DIRECTION

90 : Y : Y : X 0

DIRECTION CAN BE FROM 0 TO 180 WITH 0 AT RIGHT,180 AT LEFT, AND 90 STRAIT AHEAD. NOTE X IS MINUS FROM 90 TO 180

HIT 'CR' TO CONTINUE?

YOU ARE TO FIRE AT A TARGET AT THE X AND Y COORDINATES LISTED. YOU WILL BE GIVEN THE DISTANCE FROM TARGET AND THE COORDINATES OF EACH OF 3 SHOTS FIRED. A FINAL SCORE WILL BE LISTED AFTER EVERYONE IS DONE.

LIST YOUR NAMES IN ORDER, WHEN ASK. GOOD LUCK. HOW MANY PLAYERS? 3

PLAYER 1 NAME? RON PLAYER 2 NAME? STEVE PLAYER 3 NAME? JIM RON, YOUR TURN TARGET AT X,Y 2662.6, 2944.8 EL., DIR.? 24,47 517.6 FT. AWAY 2356.7, 2527.2

EL.,DIR.? 28,47 129.9 FT.AWAY 2629.1, 2819.3

EL.,DIR.? 29.3,48.1 15.2 FT.AWAY 2650.6, 2954.1

HIT 'CR' TO CONTINUE?

STEVE, YOUR TURN TARGET AT X,Y 1435.0, 562.4

EL.,DIR.? 9,22 105.5 FT.AWAY 1332.2, 538.2

EL.,DIR.? 9.8,22 24.5 FT.AWAY 1446.2, 584.3

EL.,DIR.? 9.65,21.8 11.5 FT.AWAY 1426.9, 570.7

HIT 'CR' TO CONTINUE?

JIM, YOUR TURN TARGET AT X,Y 2541.1, 1987.3

EL.,DIR.? 24,38 229.5 FT.AWAY 2723.0, 2127.4

EL.,DIR.? 22.5,38 62.0 FT.AWAY 2591.0, 2024.3

EL.,DIR.? 22,38 4.4 FT.AWAY 2545.4, 1988.6

HT 'CR' TO CONTINUE?


PLAYER

BEST SHOT

RON STEVE JIM 15.2 FEET 11.5 FEET 4.4 FEET

*** WINNER IS *** JIM ANOTHER GAME? NO HOPE YOU LIKE THE ARTILLARY RANGE. COME AGAIN.

END






Fig. 1. Flowchart.

to go on. If you are going to use a TTY, then all the statements for control of the CRT terminal can be eliminated.

As the game is now, each player has 3 tries, of which calculations for the winner. A sample run is shown in Fig. 2. I can see many ways to vary this game. Change the "amount of powder" to change the distance of shell

the best is used in the final travel. What happens if there is wind? This would make the cannon and mortar hit at different points. How about a handicap for the expert? Form teams and shoot at each other? Maybe that

would be considered WAR and not practice.


I hope you enjoy the practice and can keep your computer in control.

```
0690 Y=2600*RND+500
0700 IF RND>.5 THEN X=-X
0010 REM ** ARTILLERY PRACTICE **
0020 REM FOR 8K BASIC AND CRT
                                                         0709 REM START PLAY-NEW PAGE
0030 REM BY H. DEMONSTOY 1-6-77
0040 REM RUN ON SWTP6800 WITH
                                                         0710 PRINT "";
0050 REM CT-1024 CRT TERMINAL
                                                         0715 PRINT P$(I);", YOUR TURN"
0060 REM 10K MEMORY NEEDED
                                                         0720 PRINT "TARGET AT X,Y ";X;", ";Y
0100 PRINT "THIS IS A TARGET PRACTICE GAME"
                                                         0730 FOR J=1 TO 3
0110 INPUT "INSTRUCTIONS",Q$
                                                         0735 PRINT
0120 GOSUB 2200
                                                         0740 INPUT "EL., DIR.", B,C
                                                         0749 REM KEEP SHOT ON THE RANGE
0130 IF F=0 GOTO 490
                                                         0750 IF B < 90 THEN IF B > 0 GOTO 760
0140 REM INSTRUCTIONS PAGE 1
0145 PRINT "":
                                                         0755 GOTO 2000
0150 PRINT "THE ELEVATION LOOKS LIKE THIS."
                                                         0760 IF C < 180 THEN IF C > 0 GOTO 770
                                                         0765 GOTO 2020
0160 PRINT
0170 PRINT "
                                                         0769 REM GET SPOT HIT
0180 PRINT "
                                                         0770 A=3.14159/180
0780 D=ABS(9300*SIN(B*A)*COS(B*A))
0190 PRINT "
                                                               X1=D*COS(C*A)
Y1=D*SIN(C*A)
0200 PRINT "YOU /
                                                         0790
0210 PRINT "
                                      TARGET"
                                                         0800
                   ELEVATION
                                                         0810 D1=SQR ((X-X1)*(X-X1)+(Y-Y1)*(Y-Y1))
0220 PRINT
                                                         0819 REM KEEP BEST SHOT
0230 PRINT "AN ELEVATION FROM 0 TO 45 WILL"
0240 PRINT "INCREASE THE DISTANCE, BUT"
                                                         0820 IF J=1 THE D(I)=D1
                                                         0830 IF D(I) > D1 THEN D(I)=D1
0250 PRINT "BEYOND 45 THE DISTANCE WILL GET"
0260 PRINT "SHORTER UP TO 90, WHEN IT WILL'
                                                         0840 PRINT D1;"FT.AWAY ";X1;", ";Y1
0270 PRINT "GO STRAIT UP AND BACK ON YOU"
                                                         0850 NEXT J
                                                         0860 GOSUB 2100
0280 GOSUB 2100
0284 REM INSTRUCTIONS PAGE 2
                                                         0870 NEXT I
                                                         0889 REM NEW PAGE-FINAL RESULTS
0285 PRINT ""
                                                         0890 PRINT ""
0290 PRINT "ARTILLERY RANGE DIRECTION"
                                                         0900 PRINT "PLAYER", "BEST SHOT"
0300 PRINT
0310 PRINT "
                            90"
                                                         0905 PRINT
0320 PRINT "
                                                         0910 FOR I=1 TO P
                                                         0920 PRINT P$(I),D(I);"FEET"
                            : Y"
0330 PRINT "
                            : "
                                                         0930 IF I=1 THEN W=D(I)
0940 IF W > D(I) THEN W=D(I)
0340 PRINT "
                                       X 0"
0350 PRINT "180 -X
0360 PRINT "-----YOU-----,
                                                         0950 NEXT I
0370 PRINT
                                                         0955 PRINT
0380 PRINT "DIRECTION CAN BE FROM 0 TO 180"
                                                         0960 FOR I=1 TO P
0390 PRINT "WITH 0 AT RIGHT, 180 AT LEFT,"
0400 PRINT "AND 90 STRAIT AHEAD."
0405 PRINT "NOTE X IS MINUS FROM 90 TO 180"
                                                         0970 IF W=D(I) THEN PRINT "*** WINNER IS *** ";P$(I)
                                                         0975 NEXT I
0980 INPUT "ANOTHER GAME",Q$
0410 GOSUB 2100
                                                         0990 GOSUB 2200
0419 REM INSTRUCTIONS PAGE 3
                                                         1000 IF F=0 GOTO 1800
0420 PRINT ""
                                                         1010 INPUT "SAME PLAYERS",Q$
0430 PRINT "YOU ARE TO FIRE AT A TARGET"
                                                         1020 GOSUB 2200
0435 PRINT "AT THE X AND Y COORDINATES"
                                                         1030 IF F=0 GOTO 490
0440 PRINT "LISTED. YOU WILL BE GIVEN THE"
                                                         1040 GOTO 660
0445 PRINT "DISTANCE FROM TARGET AND THE"
                                                         1800 PRINT "HOPE YOU LIKE THE ARTILLARY"
0450 PRINT "COORDINATES OF EACH OF 3 SHOTS"
                                                         1810 PRINT "RANGE. COME AGAIN."
0455 PRINT "FIRED. A FINAL SCORE WILL BE"
                                                         1819 REM GO TO FLOATING DECIMAL
0460 PRINT "LISTED AFTER EVERYONE IS DONE."
                                                         1820 DIGITS= 0
0465 PRINT
                                                         1900 END
0470 PRINT "LIST YOUR NAMES IN ORDER, WHEN"
                                                          2000 PRINT "WRONG ELEVATION"
0475 PRINT "ASK. GOOD LUCK."
                                                         2010 GOTO 740
0489 REM GET LIST OF PLAYERS
                                                         2020 PRINT "WRONG DIRECTION"
0490 INPUT "HOW MANY PLAYERS",P
                                                         2030 GOTO 740
0500 DIGITS= 0
                                                         2100 PRINT
0505 PRINT "";
                                                         2110 INPUT "HIT 'CR' TO CONTINUE",Q$
0510 FOR I=1 TO P
                                                         2120 RETURN
0520 PRINT "PLAYER ";I;"NAME";
                                                         2200 IF LEFT$(Q$,1)="N" GOTO 2240
                                                         2210 IF LEFT$(Q$,1)="0" GOTO 2240
0530 INPUT P$(I)
                                                         2220 F=1
0540 NEXT I
0659 REM MEASURE TO .1 FEET
                                                         2230 RETURN
0660 DIGITS= 1
                                                         2240 F=0
0670 FOR I=1 TO P
                                                         2250 RETURN
0679 REM CALCULATE TARGET
                                                         2260 END
0680 X=2600*RND+500
```

FANTASTIC SOFTWARE

This LIBRARY is a complete do it yourself kit. Knowledge of programming not required. EASY to read and USE.

Almost FREE Less Than \$1 / Program Complete



VOLUME I ... \$24.95
BOOKKEEPING
GAMES
PICTURES

VOLUME II ..\$24.95
MATH & ENGINEERING
PLOTTING & STAT
BASIC STATEMENT DEF

VOLUME III ... \$39.95
ADVANCED BUSINESS
BILLING
INVENTORY
PAYROL!


VOLUME IV ...\$9.95 GENERAL PURPOSE

VOLUME V ..\$9.95

This library is the most comprehensive work of its kind to date. There are other software books on the market but they are dedicated to computer games. The intention of this work is to allow the average individual the capability to easily perform useful and productive tasks with a computer. All of the programs contained within this Library have been thoroughly tested and executed on several systems. Included with each program is a description of the program, a list of potential users, instructions for execution and possible limitations that may arise when running it on various systems. Listed in the limitation section is the amount of memory that is required to store and execute the program.

Each program's source code is listed in full detail. These source code listings are not reduced in size but are shown full size for increased readability. Almost every program is self instructing and prompts the user with all required running data. Immediately following the source code listing for most of the programs is a sample executed run of the program.

The entire Library is 1100 pages long, chocked full of program source code, instructions, conversions, memory requirements, examples and much more. ALL are written in compatible BASIC executable in 4K MITS, SPHERE, IMS, SWTPC, PDP, etc. BASIC compilers available for 8080 and 6800 under \$10 elsewhere.

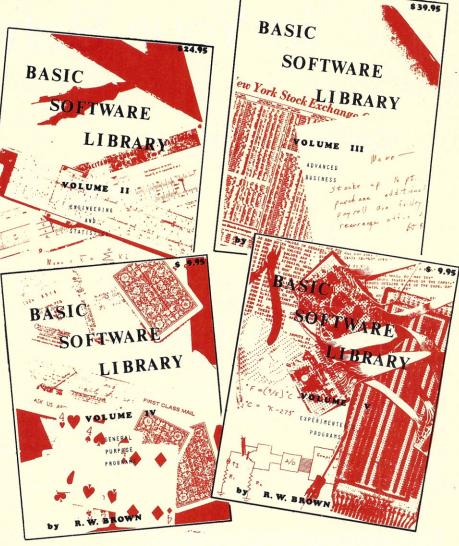

Available NOW!!! at most computer stores

The "HOW-TO-DO IT" Books for the "DO-IT" Person

Written in compatible BASIC immediately executable in ANY computer with at least 4K, NO other peripherals needed.

See Our List Of Dealers

Add \$1.50 per volume for postage and handling.

SCIENTIFIC RESEARCH



master charge

1712-K FARMINGTON COURT CROFTON MD 21114

Phone Orders call (800) 638-9194



Information and Maryland Residents Call (301)-721-1148

Personal checks — allow 4 weeks for shipping. Pricing subject to change without notice. If air mail shipping is desired add \$3 per volume to price, Continental U.S. only. Foreign orders add \$8 for each volume.

Put a Micro in Your School


... getting started

with zero bucks!

I've seen other teachers go through the problems which Harley describes here in acquiring computers for their schools. Perhaps his experience will help other teachers with the same objectives. More important, his story might fire up those of you who aren't teachers to start looking at ways and means of getting computers into your children's schools. As a matter of fact, reprints of this article could be used as part of the ammunition in convincing a school board to buy a few microprocessor systems (especially with Sheila's happy smiling face as part of the package!). — John.

was introduced to computer programming in the summer of 1970 while taking graduate courses in mathe-

matics at Central Michigan University. An introductory course in FORTRAN on the good old IBM 1130 very

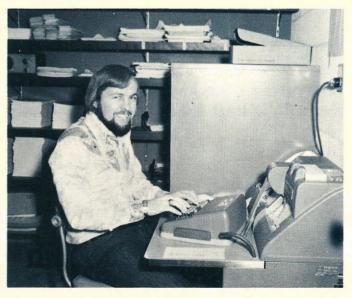

The way we were — Harley Dyk sitting at the keyboard of the retired Model 26 keypunch (photo by LCDR F. Wayne Brown).

quickly made an addict of me. Keypunching all your own cards (the system was strictly batch) and losing 10 points on every problem for each time your program failed to run correctly was quite far removed from having your own microprocessor in your basement, but compared to nothing it was great and I was hooked.

Starting a High School Computer Class with Zero Bucks

Upon returning to teaching in the fall, I immediately began looking for computer time for 3 reasons. First, if I could so easily become hooked on programming and enjoy it so much, why couldn't (and shouldn't) high school students have the same opportunity and experience? Also, I felt that any student who wanted to learn the basics of programming or was curious about computers should have the opportunity to be exposed. Last, I needed some computer time to satisfy my addiction.

My search turned up the fact that our intermediate school district was the cheapest source of computer time. Our school district was paying a fixed amount per

student for scheduling, report cards, etc., and could use the computer for instructional purposes at no additional cost. To make the arrangement irresistible, they agreed to do the keypunching. Since my school board favors most proposals that have little or no cost attached, the fall of 1971 found me teaching a new course called Computer Math. The FORTRAN language was used for 2 reasons: This was the only language I knew, and the computer center had a little used FORTRAN compiler on the shelf for the Honeywell 200.

Things went as well as could be expected. In spite of shuffled card decks, dropped program decks, lost programs, coding forms returned unpunched, computer breakdown, Murphy's Law, etc., some programming was taught. But who could complain? The price was right. But after a year the computer center moved to new facilities 10 miles away; consequently it was impossible to arrange transportation of coding forms, have them punched, program decks run, and returned by the next day. If you think it is bad to wait 24 hours to find out you used a comma where you needed a period, try 48 hours! Solution? Lease a keypunch, find a student to keypunch, offer her a credit in keypunching, and presto, back to 24 hour turnover.

Unfortunately the computer center was not on my route home, and as time went on, finding someone to pick up and deliver cards twice a day became more difficult and expensive. We were now spending about \$150 a month on the keypunch, card delivery, and cards. The only good thing about our setup was that we had no limit on how many programs we could run each day.

It seemed like a logical time to begin thinking about and examining alternatives. Was something better available for \$150 a month? A check of high schools in the area yielded the fact that one high school had decided that buying computer time via phone line and Teletype was getting too expensive and had leased a \$14000 DEC PDP-8 with 2 Teletypes on timesharing but at considerably more than \$150 a month.

A Dream

January, 1975 - enter the Altair 8800 computer via Popular Electronics. I wondered if there really was a garage in Albuquerque where this invention was being put into production. September of 1975 found me researching what was available for use in teaching my class. At this point I was convinced that we needed and could afford our own system. My goal - to get a computer system in my room by September, 1976 no matter how much work and time it took.

Conception

After seeing a DEC Classic and PDP-8 in action at other schools and attending the MITS Computer Caravan, I wrote a proposal for my school board to act on. My proposal outlined my rationale and presented 3 systems: The DEC Multiuser/ 11V03 at \$20,000 (4 simultaneous users - 3 in BASIC and 1 in FORTRAN if desired), the DEC Classic with mark sense card reader at \$17,000 (FORTRAN and BASIC), and 2 Altair 8800s at about \$7,000 (BASIC only).

A Difficult Pregnancy

I gave the superintendent the proposal in January of 1976 and was scheduled for the March 8th board meeting to present my ideas. Unfortunately 3 board members were out of town for the meeting and the other 4 did not feel adequately familiar with my proposal, so it was tabled until March 22nd when hopefully all members would be present for a more fruitful discussion. The March 22nd meeting was more productive, but still it was obvious that



Computer Math student Sheila Beaver at Teletype and Altair 8800A (photo by Gary Reed).

no one really had an idea how microprocessors were being used in high schools. My proposal was eventually tabled indefinitely — the money situation was not clear at that time and a millage (tax adjustment) election was coming.

The next few months found me educating my principal and assistant principal and later the school board president (an engineer familiar with computers). I simply took them to a high school that was using a DEC Classic configuration and exposed them to the enthusiastic instructor and students.

June brought a millage defeat and a last ditch effort. rewrote my proposal, eliminating the more expensive DEC systems and asking for the Altair system. Having originally approached the school board with options was fast becoming a wise decision because the least expensive option was becoming more acceptable. Since I had written my original proposal, MITS had introduced the 16K static memory board, improved the 8800

yielding the 8800A, and Michigan now had its first computer store in Ann Arbor. I also had the chance to talk to a couple of Altair owners and was convinced that it could do what we needed. I mailed copies of my new proposals to the board members and superintendent and waited.

About the middle of July (a new superintendent had assumed his duties July 1), I received a phone call indicating that some money had been located and that I should come in for further discussion. July 27 found me at a third board meeting. Now I found out that had the administration and I come with a recommendation to buy a \$20,000 system, we probably would have been given approval. But we were proposing the Altair system and were given an OK to proceed, pending a checkout of MITS and the local store. They checked out fine. Finally, on August 5th, I grabbed the phone and ordered our computer system (before anyone could change their mind). The order was for 2 Altair 8800As, each with 16K static memory, serial I/O board, ACR board, and RQ-413 Panasonic recorder. One computer was to have an ASR-33 Teletype (for needed hard copy), and the other an ADM/3 Lear-Siegler CRT. We also ordered 8K BASIC, Extended BASIC, and a supply of Maxell UDXL C-60 cassette tapes. Total cost was about \$7000.

While waiting for the system, the Computer Store rushed me the BASIC manual and I boned up since I had not written any programs in BASIC. There was no real need for panic, school was not to start for at least 4 weeks. I found the transition from FORTRAN to BASIC very natural, easy and enjoyable. The fine manual on MITS BASIC helped a great deal. I doubt if switching from BASIC to FORTRAN would be as painless.

Birth

Our system was tentatively scheduled to be delivered September 1, but the Computer Store was experiencing labor (growth) pains and was



Computer Math student Mark Tietsort at CRT and Altair 8800A (photo by Gary Reed).

not receiving shipments from MITS when expected, so birth was not quick and painless. The fact that I am 3 hours from the Computer Store did not help either.

The teletype was the first item to arrive. I had ordered the ASR-33 directly from the Teletype Corp., from whom I received excellent cooperation. The Teletype was delivered to my room at school exactly 28 days after I had phoned in the order!

Labor Day found me picking up the first computer (sweet labor!) from a brother-in-law of the store owner. He had just come back from Ann Arbor and was only about 45 minutes from me. The store had still not received any assembled units so had sent me their demo and were assembling a kit for me. The next week found me furiously programming in my basement by night while we began a week long unit on flowcharting in my class. The keypunch machine was still in my classroom, but we ignored it.

In late September the Computer Store put on a demonstration in my room for area high school instructors showing the 8800A, 8800B, 680, disk, etc. I was supposed to get the second computer then and keep the demo so I could be totally up and running. However, a bad ACR board prevented this. A

few weeks later the second system was delivered (students had been saving programs on cassette from the CRT computer). However this ACR board would not allow us to save programs, only load them. At least we could load BASIC and load programs from the other computer, and use the paper tape feature of the Teletype to save programs. Some time later we got another ACR board and were totally up and running. Birth was complete!

Early Childhood

In spite of a difficult pregnancy and birth, early childhood has made it all worthwhile. Once our system was completed, we have had no hardware problems. I have loaded and saved hundreds of programs on cassette and have had only one failure which may have been due to my error. The computers are left on all the time (the terminals are turned off at night) so that loading Extended BASIC (which takes from 8 to 10 minutes) does not have to be done each morning. Occasionally BASIC may start acting strange or die, so each computer is loaded probably on an average of every 2 or 3 weeks. We have been using Extended BASIC Ver. 3.2 which gives us 5984 bytes for programming and 100 bytes for string

space. This is adequate memory for most programs, but some games written by my students could have used more memory. I am sure that if we had 64K someone would still complain! We have found a few flaws in the Extended BASIC Ver. 3.2 but they are nothing that we couldn't program around. The flaws should be fixed in the 4.0 version which we have on order.

The computers are housed in a 10' by 10' office adjacent to my classroom so programmers can come during any hour without bothering the class in session. They have been used an average of 5 hours a day. It was decided to try time and material for maintenance on everything except the Teletype, on which we have a service contract for \$216 for the nine month school year.

I was always under the impression that FORTRAN was a more powerful language than BASIC, but I have been able to do all my old FORTRAN programs in MITS BASIC and am very impressed with it. Some programs took more steps in BASIC, but the majority were easier to do in BASIC. I am no longer a member of STAB (Society To Abolish BASIC); as a matter of fact, I think STAB is dead.

The students love the computers, 2 or 3 of them are seriously considering purchasing their own system. One student has one on order for graduation. He thinks it is great that computers cost less than new cars, but he laments the fact that he can not take his girl out in a computer. The computers have been in such demand that the students created a number system to determine whose turn it was to work on the computer.

Conclusion

The main reason I wrote this article was to urge hobbyists (who may also be parents) to begin insisting that their junior high and senior high schools have computer classes and facilities. Many teachers (particularly math teachers) have had some education in programming, but are not familiar with the cost and capabilities of microprocessors. If you fall in this category, get off your duff and get your hands on a microprocessor. Find out if you can appropriate a couple of thousand for a system for your class. It's worth the effort! You will wonder why you didn't do it before. True, a system will cost less next year, but it is affordable now, and can you put a price on the education this year's students will miss?

Hobbyists, help that teacher get started. Maybe he is hardware shy, maybe he would be ready to move if someone in the community would be willing to help him get a system up and running. You can now buy a system (decent quality by my estimation) with 12K memory, 8K BASIC, connected to a keyboard, 16 line with 64 character video monitor, and cassette for under \$1300. True. the computer itself is in kit form. But again, find someone to help; help is available if you look, or better yet, put it together yourself. With some assembly (maybe 50 hours), one should be able to set up 2 systems, one as above, another like it but with a Teletype, for about \$3000. You could provide 4000 student hours on a computer in 2 years, not bad at less than \$1 per hour!

Our baby is healthy, but my students have indicated in a recent survey I distributed that he must grow. They think we will need at least another terminal or system next year (due to increasing interest and more students in the class). We could use faster hard copy, and a floppy disk would be very useful. OK, where are the catalogues? Hm ... time-sharing, line printer, floppy disk, Dec-Writer II, more memory . . . Say, when is the next board meeting?

The POLY 88 Microcomputer System

PolyMorphic Systems now offers the complete, assembled, personal computer system—the POLY 88 System 16. A full 16K system with high speed video display, alphanumeric keyboard, and cassette program storage. A BASIC software package providing the most advanced features available in the personal computing market. Features like PLOT and TIME, which utilize our video graphics and real-time clock. Others like VERIFY, so that you know your tape is good before you load another. Or input type-ahead so you can tell your program to run while the tape is still loading (it stores up to 64 characters of commands or question responses to be executed). All these plus a complete package of scientific functions, formatting options, and string capabilities. With the POLY 88 System 16 you can amaze your timesharing friends the very first night!

Polymorphic Systems 11K BASIC — Size: 11K bytes.

Scientific Functions: Sine, cosine, log, exponential, square root, random number, x to the y power.

Formatted Output • Multi-line Function Definition • String Manipulation and String Functions • Real-Time Clock • Point-Plotting on Video Display • Array dimensions limited by memory • Cassette Save and Load of Named Programs • Multiple Statements per Line • Renumber • Memory Load and Store • 8080 Input and Output • If Then Else • Input type-ahead.

Commands: RUN, LIST, SCR, CLEAR, REN, CONTINUE

Statements: LET, IF, THEN, ELSE, FOR, NEXT, GOTO, ON, EXIT, STOP, END, REM, READ, DATA, RESTORE, INPUT, GOSUB, RETURN, PRINT, POKE, OUT.

Built in Functions: FREE, ABS, SGN, INT, LEN, CHR\$, VAL, STR\$, ASC, SIN, COS, RND, LOG, TIME, WAIT, EXP, SQRT, CALL, PEEK, INP, PLOT.

Systems Available. The POLY 88 is available in either kit or assembled form. It is suggested that kits be attempted only be persons familiar with digital circuitry.

System 2: is a kit consisting of the POLY 88 chassis, CPU, video circuit card, and cassette interface. Requires keyboard, TV monitor, and cassette recorder for operation. \$735

System 16: consists of an assembled and tested System 2 with 16K of memory, keyboard, TV monitor, cassette recorder, 11K BASIC and Assembler on cassette tapes. \$2250.

System 0: The circuit cards an S-100 mainframe owner needs to be compatible with the POLY 88 software library. System 0 consists of the central processor card with monitor ROM, the video circuit card, and cassette interface, all in kit form. \$525.

Prices and specifications are subject to change without notice. California residents add 6% sales tax.

(805) 967-2351 **Morphic**

460 Ward Drive


Santa Barbara, Ca. 93111



BUSINESS SOFTWARE

BECOMES READILY AVAILABLE

WITH THE INTRODUCTION OF VOLUME VI OF THE BASIC SOFTWARE LIBRARY!

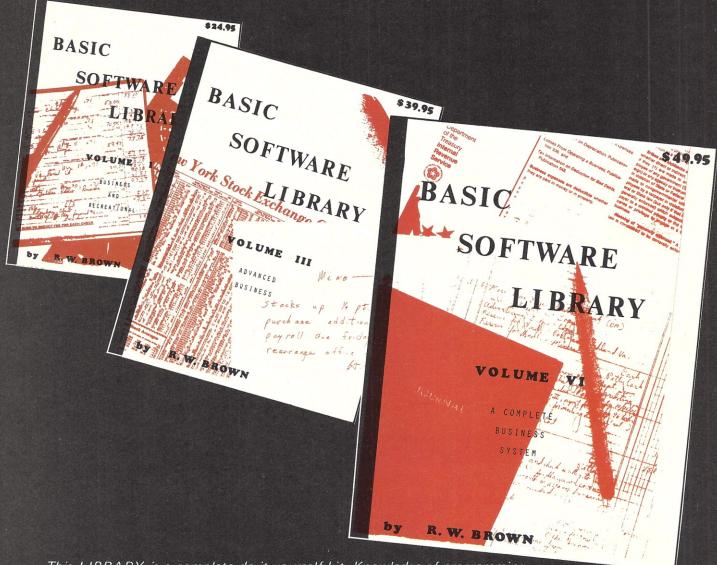

This LIBRARY is a complete do it yourself kit. Knowledge of programming not required. EASY to read and USE. Written in compatible BASIC immediately executable in ANY computer with at least 4K, NO other peripherals needed.

General Ledger, Billing, A/R, A/P, Payroll, Inventory, P/L, Balance Sheets, Tax Records, more — Volume VI Complete \$49.95. Yes, that's right — we didn't miss the decimal point. And all you need to use it is a Computer that understands BASIC and 20K of available memory with a mass storage device, such as a floppy disk. Add \$2 for shipping and handling.

Hard to believe? Well our Volume III offers Payroll,

Hard to believe? Well our Volume III offers Payroll, Inventory, Billing, A/R. etc, for only \$39.95. This volume is intended for use on very small microcomputers with no mass storage or peripheral devices. It is also written in compatible BASIC. Add \$2 for shipping and handling.

BASIC. Add \$2 for shipping and handling.

If that's not enough, our Volume I is only \$24.95 and is chock-full of additional business software. Add \$2 for shipping and handling.

The best of all is you can purchase the entire library, worth many thousands of dollars, for only \$159.70 plus \$7 for shipping and handling, while supplies last. BASIC 8080 and 6800 interpreters available for under \$10.



SCIENTIFIC RESEARCH



1712-K FARMINGTON COURT CROFTON MD 21114

BANKAMERICARD

welcome here

Phone Orders call (800) 638-9194

Information and Maryland Residents Call (301)-721-1148

Books not available until mid-June

These stores carry Scientific Research **Publications**

ARIZONA Byte Shop of Phoenix Tempe, AZ 85281 (602) 894-1129

Byte Shop of Phoenix-West Phoenix, AZ 80529 /602) 942-7300

Desert Data Computer Store Tucson, AZ 85702

CALIFORNIA A-VID Electronics Long Beach, CA 90806 (213) 426-5526

Byte Shop of Berkeley Berkeley, CA 94703 (415) 845-6366

Byte Shop of Campbell San Jose, CA 95124 (408) 377-4685

Byte Shop of Diablo Valley Walnut Creek, CA 94596 (415) 933-6252

Byte Shop of Fresno Fresno, CA 93703

Byte Shop of Hayward Hayward, CA 94541 (415) 537-BYTE

Byte Shop of Lawndale Lawndale, CA 90260 (213) 371-2421

Byte Shop of Mt. View Mt. View, CA 94040 (415) 969-5464

Byte Shop of Palo Al Palo Alto, CA 94306 (415) 327-8080

Byte Shop of Pasadena Pasadena, CA 91101 (213) 684-3311

Byte Shop of Sacramento Citrus Heights, CA 95610 (916) 726-2557

Byte Shop of San Diego San Diego, CA 92111 (714) 565-8008

Byte Shop of the San Fernando Valley Tarzana, CA 93156 (213) 343-3919

Byte Shop of San Jose San Jose, CA 95123 (408) 226-8383

Byte Shop of San Mateo San Mateo, CA 94403 (415) 341-4200

Byte Shop of San Rafael San Rafael, CA 94901 (415) 457-9311

Byte Shop of Santa Barbara Santa Barbara, CA 93101 (805) 966-2557

Byte Shop of Santa Clara Santa Clara, CA 95051 (408) 249-4221

Byte Shop/Thousand Oaks Thousand Oaks, CA 91360 (805) 497-9595

Byte Shop of Westminster Westminster, CA 92683 (714) 894-9131

Byte Shops, Inc. Sunnyvale, CA 94086 (408) 734-9000

Byte Shop of Tarzana Tarzana, CA 91356 (213) 343-3919

The Computer Mart Orange, CA 92667 (714) 633-1222

Computer Store of San Francisco, CA 94103 (415) 431-0640

The Computer Store Santa Monica, CA 90401 (213) 451-0713

People's Computer Shop Sherman Oaks, CA 91423 (213) 789-7514

Computer Componer Van Nuys CA 91411 (213) 786-7411

The Computer Shack San Leandro, CA 94577 (415) 895-9363

Computer world Stores Redding, CA 96001 Upland Computer Labs Upland, CA 91786 (714) 981-1503

CANADA Byte Shop of Vancouver Vancouver 9, B.C. (604) 736-7221

The Pacific Computer Store Vancouver, B.C. V5R 2J4 (604) 438-DATA

Trintronics Toronto, Ontario (416) 598-0262

COLORADO
Byte Shop/Arapahoe Co.
Englewood, CO 80110
(303) 761-6232

Byte Shop of Boulder Boulder, CO 80301 (303) 449-6233

The Computer Hut Denver CO, 80202 (303) 422-7040

CONNECTICUT The Computer Store Windsor Locks, CT 06096

FLORIDA Byte Shop of Cocoa Bch. Cocoa Beach, FL 32931 (305) 784-1881

Byte Shop of Miami Miami, FL 33155 (305) 264-BYTE

Computer Hut Miami Lakes, FL 33014 (305) 821-2667

MicroComputer Systems Inc. Tampa, FL 33609 (813) 879-4301

Micro Computer Systems & Sales Pompano Beach, FL 33068 (305) 972-6093

Williams Radio & TV, Inc. Jacksonville, FL 32206 (904) 354-5460

ILLINOIS American Microprocessors Equipment & Supply Corp. Prairie View, IL 60069 (312) 634-0076

The Data Domain Evanston, IL 60201 (312) 328-6800

INDIANA Computer Specialists W. Lafayette, IN 47906 (317) 743-1711

The Data Domain Bloomington, IN 47401 (812) 334-3607

Graham Electronics Indianapolis, IN 46204 (317) 634-8202

JAPAN
Byte Shop of Tokyo
2-9-9 Sotokanda
Chiyodaku, Tokyo
Kiyotake Ikeda

The Home Computer Store Indianapolis, IN 46229 (317) 894-3319

KENTUCKY The Data Domain Lexington, KY 40502 (606) 233-3346

MARYLAND Computer Workshop Rockville, MD 20852 (301) 468-0455

Science Education Ext. Corp. Potomac, MD 20854 (301) 299-9506

MASSACHUSETTS Computer Mart, Inc. Waltham, MA 02154 (617) 899-4540

Computer Warehouse Boston, MA 02215 (617) 261-2701

MINNESOTA Byte Shop of Eagan Eagan, MN 55121 (612) 452-1841

MISSOURI SSOURI Computer Systems Center of St. Louis, Inc. Chesterfield, MO 63017 (314) 576-5020

Computer Workshop Kansas City, MO 64152 (816) 741-5055

Computer Workshop Kansas City, MO 64152 (816) 741-5055

NEW HAMPSHIRE Nashua, NH 03060 (603) 883-2386

Microcomputers, Inc. Nashua, NH 03060 (603) 889-1646

NEW JERSEY The Computer Mart of New Jersey Iselin, NJ 08830

Hoboken Computer Hoboken, NJ 07030 (201) 420-1644

NEW YORK Byte Shop of Levittown Levittown, NY 11756 (516) 731-8116

Computer Mart of Long I East Meadow, NY 11554 (516) 794-0510

The Computer Mart of NY New York, NY 10001 (212) 279-1048

Mini Micro Mart Syracuse, NY 13203 (315) 422-4467

Synchro-Sound Enterprises Hollis, NY 11423 (212) 468-7067

OHIO Digital Design Cincinnati, OH 45243 (513) 561-6733

OKLAHOMA High Technology Oklahoma City, OK 73116 (405) 842-2021

OREGON Byte Shop of Beaverton Beaverton, OR 97005 (503) 644-2686

Byte Shop of Portland Portland, OR 97201 (503) 223-3496

PENNSYLVANIA Byte Shop of Bryn Mawr Bryn Mawr, PA 19010 (215) 525-7712

Personal Computer Corp. Frazer, PA 19355 (215) 647-8460

RHODE ISLAND Computer Power In Warwick, RI 02886 (401) 738-4477

SOUTH CAROLINA Byte Shop of Columbia Columbia, SC 29205 (803) 771-7824

TENNESSEE Byte'Tronics Nashville, TN 37203 (615) 329-1979

Micro Computer Systems Knoxville, TN 37922 (615) 966-9849

TEXAS Altair Computer Center Houston, TX 77036 (713) 780-8981

The Computer Shop Vanguard Systems San Antonio, TX 78216

Electrotex Houston, TX 77006 (713) 526-3456

Interactive Computers Houston, TX 77036 (713) 781-2703

K. A. Electronics Dallas, TX 75247 (214) 634 7870

Micro Store Richardson, TX 75080 (214) 231-1096

Southwest Technical Products San Antonio, TX 78216

UTAH
Byte Shop/Salt Lake City
Salt Lake City, UT 84111

VIRGINIA Computer Hobbies Unl. Richmond, VA 23235 (804) 276-5056

Media Reactions Inc. Reston, VA 22090 (703) 471-9330 Shire Enterprises Richmond, VA 23222 (804) 321-4560

WASHINGTON Almac/Strom Elec. Seattle, WA 98108 (206) 763-2300

WISCONSIN

Microcomp Fond du Lac, WI 54935 (414) 922-2515 The Milwaukee Computer Store Milwaukee, WI 53213 (414) 259-9140

SURPLUS

P 0 W E **CONTROL DATA**

BARGAIN

+ 5V @ 7A - 12V @ 2A +180 V @ 150 ma +12V @ 2.5A +30V @ 200ma (unregulated) -6.2V @ 25ma (no adj. pot)

Brand new, made by CDC for microprocessor terminals. 110 VAC in, regulated and adjustable DC outputs. Overvoltage protected +5, -12. Power status signal. Fan. Schematic. Original list \$600+. From stock, UPS paid, custom foam box, guaranteed.

\$50.00

S

U

P

L

ELECTRAVALUE INDUSTRIAL BOX 464 Cedar Knolls, NJ 07927 (201) 267-1117

E18

WHERS Write or call for a current appraisal of up-and-running, checked-out software. We now have several programs on either cassette or paper tape ready for immediate shipment. Prices start at \$19.95 each postpaid.

MICRO SOFTWARE SPECIALISTS, INC.

2024 Washington Street Commerce TX 75428 (214) 886-6300

Torpedoes Away!

... submarine game for the SR-52

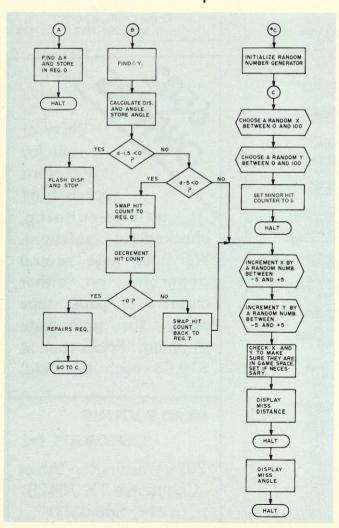


Fig. 1. Flowchart of game.

Charles G. Hanson Box 612 Carmel IN 46032 eter Stark (*Kilobaud* #2, p. 70) has created an interesting game concept for use on the SR-52. Unfortunately, his implementation has resulted in a game which is virtually unwinnable, and hence, is likely to generate terminal frustration on the part of the player. There are three major difficulties which I have eliminated in the attached program listing.

First, Pete's version provides the player no information concerning the location of the submarine which is directly usable in improving his next shot. The information consists only of a distance by which you missed. It is necessary to plot this information on a piece of graph paper in order to establish a new target point, but note that the sub could be anywhere on the circle. Firing a second shot will allow you to draw a second circle which will allow you to zero in on two possible areas in which the sub might be hiding. A third shot should now get you close enough to a defi-

Complete Control.



Introducing IMSAI 8048 Single Board Control Computer.

Complete Control System Intel developed the world's first single chip microcomputer. IMSAI has built the

system to put it to work. Instantly!
Presenting the IMSAI Single Board Control Computer. A complete program-mable computer and hardware control system on an 8½" x 10" board.

Just plug in the power source (a 5V power supply or a 6V battery will do), and you can be controlling your home environment today!


The Chip Designed for Control

Intel designed the 8048/8748 single chip microcomputer with one thought in mind. Complete control. Everything you need is there: CPU, RAM, IK ROM/EROM, I/O, timer/counter, interrupts . . . the works.

The Board That Implements It Instantly

There's a 24 pad hexadecimal keyboard and 9-digit LED hex display already on board. So you can start controlling the coffeepot and the sprinklers the minute you get the IMSAI home. Without adding anything but the connecting wires.

You can run almost any peripheral available. Not to mention the kids' electric train. The IMSAI Control Computer is



RS232 compatible. There are 12 quasibidirectional I/O lines with handshaking and 14 more regular I/O lines, 5 heavy duty relays, and Teletype and audio cassette interfaces. All on one board.

There's already an extra IK of RAM on

board, plus sockets for another 1K of RAM and 2K of ROM/EROM. Still need more memory? The IMSAI 8048 allows expansion up to 64K of RAM off board.

Ultimately, the only limit to this system is your imagination.

Now, that's control.

For instant control, use the coupon provided.

GENTLEMEN:	
I want instant control!	
Send ROM Computer K	
Send EROM Computer	
Send assembled ROM C	
Send assembled EROM	
Send 5V power supply \$ *June delivery.	לכנו
Check/MO enclosed, Amt.	2
Charge my: BAC N	
_	
#	Exp. Date
Sig	
Send more information.	
Name	
Address	
City	
···)	1
State / 7in	

IMSAI Manufacturing Corporation 14860 Wicks Blvd. San Leandro, CA 94577 (415) 483-2093 TWX 910-366-7287

nite locale that you have a fair chance for a minor hit on the fourth shot.

But before you get your hopes too high, note that after every shot the sub moves to a new location somewhere within a grid of 100 points centered on its previous position. However, you only have that previous position within a probable grid of maybe 16 points. This means that your fourth shot is aimed at a grid of approximately 196 points, including uncertainty. Now consider that there are only 69 points within the minor hit circle and that only one of them is a kill, and you will understand why I suggest that this game could easily lead to a severe case of frustration.

However, there is still one more gremlin lurking within Pete's game. You are playing the game with the impression that the sub is lying within a grid defined as 0≤X≤100, and 0≤Y≤100. It is not, and in fact you will probably be outside the allowed range during your first game. This is because Pete allows his random number generator to start with a seed of zero, which means that the first number generated is 100, which is precisely on the border. In addition, there is no routine included which will prevent the position jogging part of the program from generating a subsequent position between 100 and 105. The highest number that I saw before discovering this aspect of the problem was 108.

Therefore, in the interest of preserving the sanity of all SR-52 owners who would like to play Submarine, I submit the attached program which does the following:

- 1. Restricts the sub to the 0 to 100 grid.
- 2. Places 9 points within the kill zone.
- Provides direction as well as range for the player who wants it.
- 4. Assures that the sub begins the game well inside the grid.

A comparison of the attached flowchart with Pete's will show the important differences. I have also used the Texas Instrument conventions in indicating keystrokes.

The new rules of play are as follows:

- 1. Start the first game by pressing *C
- 2. Enter your target x Press A

3. Enter your target y Press

- 4. Flashing display indicates
- 4. Flashing display indicates a kill. Begin a new game by pressing CLR, C
- 5. Steady display shows the distance by which you missed (same as Pete's version).
- 6. Press RUN to display the angle to the target in polar notation. Your target point is considered the origin. Skipping this step will not affect program operation.
- 7. Enter new target locations as above.

Good hunting! ■

Location	Keystrokes	Comments
000	*LBL A	Enter x for depth charge
002	+/- + RCL 0 1 =	Calculate $\triangle x$
800	*EXC 0 0 HLT	Store in register 0, wait for y value
012	*LBL B	Enter y value for depth charge
014	+/- + RCL 0 2 =	Calculate △ y
020	INV *P/R	Calculate distance and angle
022	STO 0 4	Store angle in register 4
025	RCL 0 0 - 1.5 =	compare distance to 1.5 for kill
033	*if pos *4	If greater, skip to *4
035	0 *1/x HLT *LBL *4	If less, Flash display and stop
038 040	RCL 0 0 - 5 =	Compare distance to 5 for minor hit
046	*if pos *6	If greater, skip to *6
048	*EXC 0 7	If less, swap hit counter from register 7
051	*EXC 0 0	to register 0
054	INV *dsz C	Decrement hit counter, skip to C on zero
057	*EXC 0 0	Put distance back in register 0, swap hit
060	*EXC 0 7	counter back to register 7
063	*LBL *6	
065	SBR *1	Get a small random number
067	SUM 0 1	Move sub sideways
070	SBR *1	Get another small random number
072	SUM 0 2	Move sub vertically
075	RCL 0 1	
078	INV *if pos *7	If new x position is less than 0, go to *7
081	-101=	76 1 1 100 1 *0
086	*if pos *9	If new x is greater than 100, go to *9
088	RCL 0 2	If your reigiloss than O go to \$2
091	INV *if pos *3 -101=	If new y is less than 0, go to *3
094 099	*if pos *5	If new y is greater than 100, go to *5
101	RCL 0 0 HLT	Display miss distance and stop
105	RCL 0 4 HLT	Display miss angle and stop
109	*LBL *C	Display miss angle and stop
111	*CMs	
112	* π *log	Initialize seed of random number generator
114	STO 0 3	to be nonzero and store in register 3
117	*LBL C	Reset
119	SBR *8	Get a big random number
121	STO 0 1	Store as subs x position
124	SBR *8	Get another big random number
126	STO 0 2	Store as subs y position
129	5 STO 0 7 HLT	Set hit counter to 5 and stop
134	*LBL *1	Start of subroutine to get a small
136	5+/-	random number
138	+.1 X	Start of subventing to get a hig
142 144	*LBL *8 100 X ((7 y ^x 9	Start of subroutine to get a big random number
153	X RCL 0 3	rangom number
157	X 5 +/- INV *log)	Shuffle numbers to make them
163	-(RCL5)	seem random
170	*fix 0 *D.MS INV *fix)	
176	STO 0 3 =	
180	*fix 0 *D.MS INV *fix	
185	*rtn	End of random number subroutines
186	*LBL *7	
188	0 STO 0 1	Set x position to 0
192	GTO 0 8 8	Go test y position
196	*LBL *9	
198	1 0 0 STO 0 1	Set x position to 100
204	*rtn	Go test y position
205	*LBL *3	
207	0 STO 0 2	Set y position to 0
211	GTO 1 0 1	Display miss distance
215	*LBL *5	0-1
217 223	1 0 0 STO 0 2 *rtn	Set y position to 100 Display miss distance



IS YOUR DOLLAR BUYING AS MUCH POWER & FLEXIBILITY AS TDL'S XITAN SYSTEMS PROVIDE?

OUR CUSTOMERS SAY THINGS LIKE THIS ABOUT TOL PRODUCTS: "... the best CPU board I've put together... excellent parts...
worked right off without trouble shooting." ... JRG
Cambridge, Mass.

"Great product." ... KMM
Bella Vista, Ark.

"... high quality components, good engineering & complete
documentation... up and running without any problems." ... WP
Seattle, Wash.

"Excellent." Col. DWW
Santa Maria, Calif.

"Very impressed with superb quality." ... SK-1
Boston, Mass.



When we combined our highly praised ZPU board and our System Monitor Board, we defined the standard for the industry; we integrated more power and flexibility in two slots of our motherboard than most other systems can muster using five or more boards. When we put this setup into our rugged aluminum case we created the first XITAN system, the alpha 1. By adding a CRT terminal and or teleprinter you will have a complete computer system.

KIT: \$769 ASSEMBLED & TESTED: \$1039

XITAN
alpha 2

By adding a Z16 memory module and our PACKAGE A software to the alpha 1 we created a second XITAN system, the alpha 2. Thus, a complete and extremely powerful micro-computer system emerges well worthy of you who are operating at the most sophisticated levels. The XITAN alpha 2 provides you with 18K of RAM, 2K of ROM, 2 serial LO ports, 1 parallel LO port, our 1200 baud audio cassette interface as well as our extraordinarily powerful software package which includes 8K Basic, the Text Output Processor, the Zapple Text Editor and the Relocating Macro-Assembler. Add your own LO device and GO...with the most powerful and flexible micro-computer package ever offered.

KIT: \$1369 ASSEMBLED & TESTED: \$1749

IF YOU ARE A BEGINNER, YOU WON'T EASILY OUTGROW THE XITAN SYSTEM.

IF YOU ARE AN ADVANCED USER, YOU WILL DISCOVER XITAN IS EXACTLY WHAT YOU NEED.

†Write for descriptive brochure on the XITAN **alpha** series and system software. When you ask at your dealer, say "ZY-TAN."

ORDERING INFORMATION: Send check, money order or BankAmericard, Master Charge current number and expiration date. Shipping is usually made via UPS or UPS Blue Label. Specify other arrangements if you wish. Prepaid orders are shipped postpaid.



RESEARCH PARK BLDG H 1101 STATE ROAD PRINCETON, NEW JERSEY 08540 (609) 921-0321

INTRODUCING THE COMPLETE CHALLENGER SYSTEM.



OSI's DREAM MACHINE is a totally integrated computer system.

Imagine a system complete with terminal, CPU, memory, floppy disk, software, and all the little necessities to make it work together immediately. Now imagine this complete system available not only fully assembled, but priced much lower than anyone else's kit. What you are dreaming of is OSI's "new" Challenger System!

In the configuration shown above, the Challenger includes everything an end user needs for a complete small computer system. All you add is 110 VAC power and a desk to put it on. This fully-assembled system includes:

HARDWARE:

OSI Challenger 65 with 16K RAM, serial interface, system monitor PROM, and floppy disk bootstrap PROM.

OSI Challenger single drive floppy disk formatted for 250K bytes storage per diskette surface.

Stand-alone terminal and Sanyo monitor for 16 lines of 64 characters at 2400 baud (other terminal options are available). And all interconnecting cables!

SOFTWARE:

2 diskettes containing over 100,000 bytes of software including OSI's powerful Disk Operating System with variable length sectors. 6502 DISK BASED RESIDENT ASSEMBLER/EDITOR! A totally interactive Assembler/Editor which assembles up to 600 lines a minute and is completely compatible with MOS Technology's Cross Assembler format. This program also contains a powerful disk-based line editor with commands for general text editing. OSI'S EXTENDED MONITOR: A powerful machine language debugging and utilities package including a Disassembler which is format compatible with the Assembler! OSI 6502 8K BASIC FOR DISK BY MICROSOFT: This powerful BASIC has all the features of Altair® 8K BASIC for the 8080 plus higher speed and disk storage. And it comes complete with a BASIC program library.

DOCUMENTATION AND SUPPORT:

We include over 600 pages of hardware, software, programming, and operation manuals. The Challenger is based on the well-proven OSI 400 system. The over 2,000 OSI 400s and Challengers now in use assure continuing hardware and software support for this system for years to come!

EXPANDABILITY:

The Challenger System can now be expanded to 192K of RAM and 16K of I/O and ROM. There are over 13 accessory boards including A/D, D/A, parallel and serial I/O, cassette interfaces, a dual drive floppy, a video graphics display, several RAM and PROM boards, and multiple-processor configurations.

APPLICATIONS:

The Challenger system is complete, fully assembled and configured so that the Disk Operating System can be booted in immediately on system power-up. Even a relatively inexperienced operator can have a complex BASIC program on-line just seconds after the system is turned on. The ease of use, high reliability, and large library of standard BASIC applications programs make the OSI Challenger System the first practical and affordable small computer system for small business, educational institutions, labs, and the personal computerist.

PRICES:

Challenger System, complete as stated above with terminal and monitor

As above without terminal. Specify RS-232 or 20ma loop and baud rate

IMPORTANT NOTE:

One of the most important features of the Challenger System is that it is not really "new". OSI has been delivering the basic circuitry of the Challenger since November 1975 and the floppy disk since June 1976. The only thing new is the total integration of the components as a complete, simple to use, fully-assembled, small computer system.

For more <u>free</u> information and the address of the OSI Computer Dealer or representative in your area, write to: OSI; Dept. S; Hiram, Ohio 44234 or enclose \$1.00 for the full OSI catalog which contains kits from \$134 and fully assembled computers from \$439.



Ohio Scientific Instruments

11679 Hayden Street, Dept. S, Hiram, Ohio 44234

Build a Pulse Generator

a useful hardware test aid

Bob Grater Lockheed Space Systems Sunnyvale CA 94086

George Young Sierra High School Tollhouse CA 93667






Fig. 1. Basic circuit.



Radio Frequency Pulse Generator schematic diagram.



Enclosure and front panel for the pulse generator.




Fig. 2. Pulse Generator.

hat is it? Well it's a super simple, "super cycle," almost foolproof audio and radio frequency pulse generator, with a wide range of applications. What happened? Well Bob spotted the circuit in the design of a new telemetry test unit, sent it to George, George pounded and expounded on it, and hence this article. But why the "Super Cycle?" Some of us diehards love to plug cycles whenever we can, with all due respect to Mr. Hertz.

Fig. 1 shows the fundamental circuit. Any of the members of the Schmitt-Trigger family will work, the 7414, 7413, 74132, and 8T16. On the multiple input gates, all of the gate lines must be tied together, and since there are several individual gates in one package, one of the other gates may be used as a buffer if you wish.

The Schmitt-Trigger uses a hysteresis, or backlash effect. To put it in simpler terms, the turn-on voltage for the gate is higher than the turnoff voltage, typically about 800 millivolts. This is what causes it to oscillate when the feedback resistor is put between the input and out-

In Fig. 2 George has whipped up a multiple range pulse generator that he has had operating from about 1/10 PPS to 15 MHz. In fact, a 68 pF capacitor was tried, and the circuit operated up to 30 MHz. You may select your own values of capacitance to allow for overlapping each

Now, Fig. 3 shows how to really complicate a simple circuit. What we have here is two separate Schmidt-Trigger oscillators. One operating at audio frequencies and one at rf frequencies. We can feed both of these frequencies into a NAND gate and come out with modulated rf. This might seem to some out of the realm of a computer oriented publication - not so! Remember those 1 MHz and 2 MHz clocks on your CPU board? Well, what comes out of this little bugger is a positive going square wave (well it's almost square) that is great for clocking all sorts of goodies. And if that gets boring, you can always jam your neighbors AM radio with it - playing different tones with the modulation should drive him right up the

Referring again to Fig. 3: The entire circuit can be packaged in a 2 x 3 x 4 mini-box if miniature switches and controls are used. The photo shows the finalized version George came up with. If you use a 74132 Quad-NAND-Schmitt-Trigger (what a mouthful), you can do the whole thing with just one chip.

In any case, the basic circuit will provide a quick-anddirty clock, with a fairly decent waveform in an emergency.

A TVT For Your KIM

... at a price you won't believe

ere is the great happening in TVT technology you have long been waiting for. Take a small, single-sided PC card with SIX integrated circuits on it, plug it into your KIM-1 or other microcomputer and display up to several thousand upper and lower case characters of your choice, all on an ordinary TV set with minimum modifications. Despite its "all the bells and whistles" performance, the cost of this new TVT approach is so ludicrously low that there's no comparing it with anything previously available. If you're a real dyed-in-the-wool scrounger (etch your own boards, steal sockets and connectors, burn your own PROMs, etc. ...), you can put this together for around nine dollars plus the rapidly dropping cost of a character generator IC!

Complete kits and readyto-go units are also available commercially, at somewhat higher but still unbelievable prices.

This new TVT development uses the microcomputer to do practically all of the

system timing and control involved in a video display. This reduces the remaining interface circuitry to three hex inverters, two baby PROMs, and a character generator. Your computer alternates its compute and display modes, just as your KIM-1 now alternates between computer and keyboard modes. With fancy enough software, you can make this alteration nearly or completely transparent. More simply, you let the screen go blank when the computer is busy and doesn't want to talk to you anyway.

An entire book could be written on this whole new TVT ballgame. In fact . . . the book is called Microprocessor Based Video Displays, and Sams will print it. What we'll do here is lift just enough out of the book to show you how to build a video display for your KIM-1. The particular circuit is called a TVT-6L (L for lower case) and we'll show you how to build displays of 16 lines of 32 characters, 13 lines of 64 characters, and 25 lines of 64

characters, along with a fancy full-performance cursor that includes scrolling, erase to end of screen, full motions, and the usual goodies. The larger displays will take more memory than the bare bones KIM-1 has, so we'll show you one way to go with a KIM-1 and KIM-2 (4K add-on RAM) pair of cards.

How It Works

The block diagram of the TVT-6L is shown in Fig. 1a. An area of your microcomputer's regular memory is reserved for your display. On the minimum KIM-1, a 512 character, 16 x 32 display on pages 02 and 03 is a good starting point, although the TVT-6L card can work with any contiguous memory block from 0000 to 0FFF. Since the KIM uses parts of page 00 and 01 for its operating system, these usually aren't available for alphanumeric display use. For the larger displays with added RAM, memory locations from pages four through seven or else four through ten (0400-07FF or 0400-0AFF)

are a good choice.

Besides these display memory pages, you'll need a place to put the SCAN program that tricks the KIM-1 and a TV set into talking to each other compatibly. Usually your SCAN program is around ninety words long. On the KIM-1, this is easily stuffed into the leftover scratchpad RAM starting at 1780.

Our DECODE read only memory is the heart of our TVT circuit. This PROM is activated by sending it an address from 2000 to EFFF. When activated, the DECODE memory causes a companion SCAN memory to force the microcomputer into a scanmode that advances the CPU's program counter 32, 64, or some other number of selected steps, advancing once each microsecond, binary counter style.

During this active horizontal scan time of usually 32 or 64 microseconds, all the memory in the microcomputer is sequentially interrogated on a one memory slot per microsecond basis. A new upstream tap is added to the memory to be displayed that always outputs data to the TVT-6L circuit, even and particularly when the display memory does NOT have access to the data bus.

So, during a scan mode, the display memory outputs characters to the TVT even though it does not have control of the data bus. The characters have the format shown in Fig. 1b, with an ASCII character using up the lower seven bits of the memory word. An optional cursor bit is placed on bit eight if wanted or needed. A zero in bit eight does nothing; a one optionally displays a winking cursor under both software and hardware control.


The lower seven bits of a character that were sent from the upstream tap go to a character generator IC1. IC1 also receives some "what row of dots do we want?" information from the DECODE

read only memory IC2. This particular character generator has an internal video shift register to directly output serial video in a 7 x 11 dot matrix with descenders format. The internal video shift register in IC1 derives its load and clock timing pulses from the KIM system clock Ø2 by way of gated oscillator IC6.

The serial output video goes now to a new, simple, and super-important circuit called a bandwidth enhancer in IC5. The bandwidth enhancer predistorts the output video to exactly cancel the way your TV set is going to try and mess it up. With this circuit, it's a simple matter to output several thousand characters per frame and still stay within the ordinary video bandwidth of a plain old TV set. Our bandwidth enhancer simply makes the dots longer than the undots, with the amount of lengthening set by a CLARITY control that is tuned to your TV for the sharpest and brightest display.

Meanwhile, two other outputs from the DECODE memory IC2 go to a position delay circuit in IC4 to provide horizontal and vertical positioning. The delayed sync signals are combined with the enhanced video in *video combiner* IC5.

IC5 gives us two outputs. One is the usual monitor output with grounded sync tips and +2 volt white level, used with monitors and completely preconverted TV sets. Our second TV output is translated upwards to put the white level at +4 volts, the usual bias level needed to go directly into the base of the first video amplifier transistor in a portable, transformer operated, solid state, black and white TV. Thus, our TV output greatly simplifies direct video interface. As Fig. 7 will show us later on, all you do is rip off the headphone jack and use it as an automatic video changeover switch, defeat the sound trap, and that's all you need - at

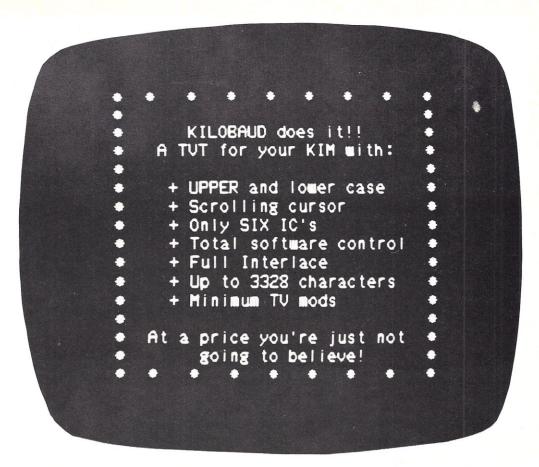

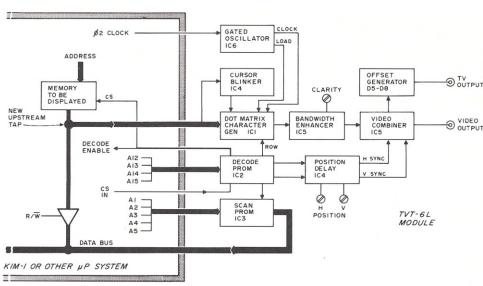


Fig. 1a. TVT-6L Block Diagram. The CPU does all the work.

least for the 16×32 display.

Three switches on the TVT-6L let you program the module to suit your particular needs. One switch picks 32 versus 64 character lines when used with suitable scan software. A second switch gives you a choice of no cursor or of a winking underline cursor under software control. The final switch is




Fig. 1b. Data bus definitions.

the neatest one to watch since it gives you a choice of all upper case or mixed upper and lower alphanumerics.

Scanning

A SCAN program activates the DECODE memory once each horizontal line, which

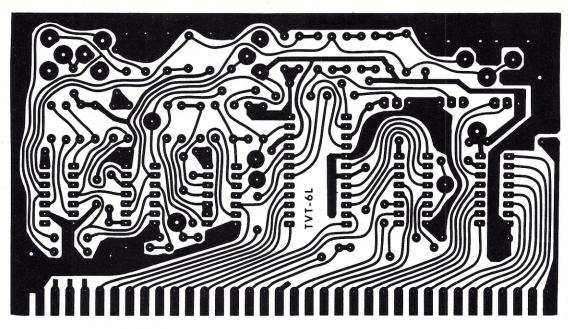


Fig. 4. TVT-6L printed circuit board layout (full size).

results in serial video being output for that particular line. If the program calls for a blank or retrace scan, all zeros are output, resulting in an all-black line. After a horizontal scan, the scan program computes the character and row information needed for

the next line, and continues this way, on through one composite frame of fully interlaced video.

The design of a scan program is extra tricky since you have to control the exact number of microseconds everything takes to keep both

the computer and the TV set happy. But once the scan program is designed and debugged, it's nothing but several dozen words of RAM or ROM available when needed to output the contents of the memory pages as video.

All our scan program does is cause the pages of memory reserved for characters to appear on the screen. The SCAN program has absolutely nothing to do with how the characters get onto or off of that memory, and couldn't care less. Your ordinary

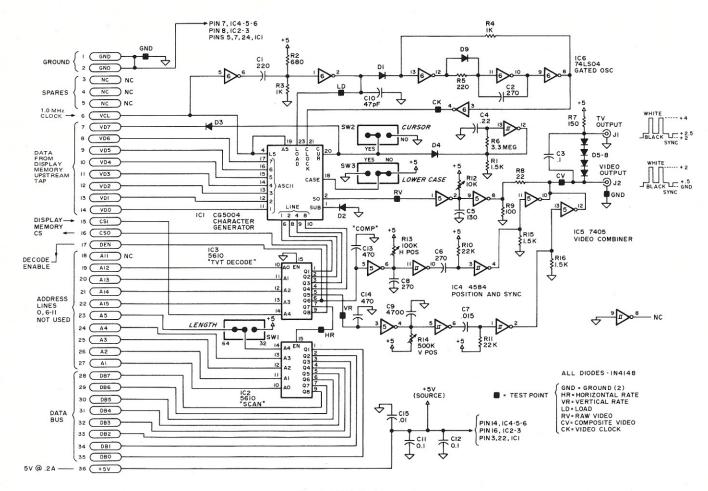


Fig. 2. TVT-6L Schematic.

WORD	NO	TES	7	6	: 5	4	3	! 2	1	0
0	LDY	240g	-	0				0	0	
1		11	-	0		0		! 0	0	
2	11	34	-	0		0	0	-	0	0
3	11	ш	-		-	0		-	0	
4	- 11	м	-					. 0		0
5	н		-		-	0	0	0		0
6	н		-	0				. 0		
7	11		-			0		0	0	
8	11	31	-	0	-	0	0	. 0	0	0
9		u		0	-	0		-		
10		M	-		-		0	. 0		
11	11		-		-		0	0		0
12		el .	-		-					
13	11		-		-			. 0		
14	11	п	-	0	-			. 0		
15			-					; 0		
16			-					0		
17			-		-			. 0		
18			-		-					
19	"				-	0	0			
20	и	и	-		-			0		
21			-		-			0		
22		11	-	0						
23	"		-		-		_	0		
24		и	-	0	-			0	0	
25					-		0			0
26	"		-							
27	"	"	-		-	0				
28	"	11	-	0	-					
29			-					0		
30					-			0		
31	RTS	1408						-0		0


Fig. 3a. Truth Table for SCAN PROM, IC2.

WORD	NOTES		7	6	1 5	4	3	2	T	0
0	NORMAL IO	0	0		; =	0		-		
- 1	NORMAL 10	0	0	-	; c			-	0	0
2	BLANK 04	0						-		
3	LINE I 04	1								
4	LINE 2 04	2						-		
5	LINE 3 04	3			1 .			; 0		
6	LINE 4 04	4						-		
7	LINE 5 04	5						1000		
8	LINE 6 04	6	0					-		
9	LINE 7 04	7						-		
10	LINE 8 05	0			;					
- 11	LINE 9 05	1					-			
12	LINE IO OF	2	0					0		
13	LINE II 05	3		0	; •		658			-
14	V SYNC 12	0		-	; c			-		
15	NORMAL 10	0			; c			0	0	0
16	NORMAL 30	0			; c					
17	NORMAL 30	0			; c			-		
18	BLANK 04	0	0							
19	LINE I 04	1			: •					
20	LINE 2 04	2					0	-0	-	
21	LINE 3 04	3								
22	LINE 4 04									
23	LINE 5 04	5	0	0						
24	LINE 6 04	6								
25	LINE 7 04	7								
26	LINE 8 05	0								
27	LINE 9 05	1						0		
28	LINE IO 05	2					-			
29	LINE II 05	3					-			OM.
30	V SYNC 32	0			-	-		. 0		

Fig. 3b. Truth Table for DECODE PROM IC3.

KIM-1 firmware can be used to load and dump memory to cassette tape. Your internal keypad can be used to put messages onto the screen by writing onto the memory pages. This trick gives you a zero cost ASCII keyboard and encoder, but at the hassle of having to write everything in hex rather than ASCII code.

For most uses, you'll want to add an external ASCII keyboard, entering on parallel A inputs and interrupting the Scan program every time you want to change a character. We'll be looking at a full scrolling cursor program later,

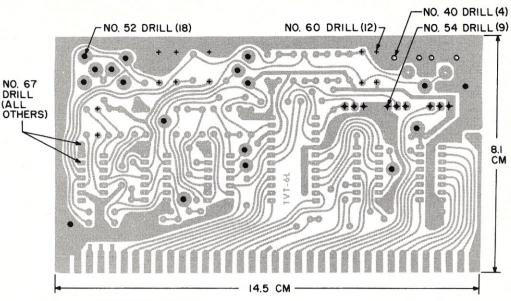

ONE REQ'D -- MAKE FROM 1.57MM SINGLE SIDED G-10 PC MAT'L

Fig. 5. Mechanical and drilling details for PC board.

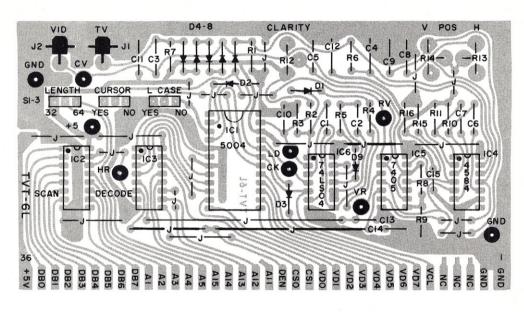


Fig. 6. Components placement overlay.

but the important point now is that you use whatever ordinary KIM-1 compatible programs you like to fill and empty the display memory pages. Your separate Scan program simply puts the memory pages on the screen.

This way, you have total access to the screen memory at any time for any reason. Things like a displayed real time clock are trivial, and you can load and dump characters at a fantastic rate. With a simple Hex-to-ASCII adapter, you can also display op-code

directly instead of alphanumeric characters. Note that this new TVT approach isn't DMA (Direct Memory Access) with its related drivers and access hassles. Your character memory is, looks, feels, and tastes just like any other memory in the microcomputer, since we've kept our upstream tap a secret from the CPU.

Building It

Fig. 2 shows you the schematic along with its parts list, while Fig. 3 gives you the


truth tables for the DECODE and SCAN read only memories. Note that these are Tri-state 32 x 8 PROMs. Their programs obviously change if you use a system different from the KIM-1.

You'll find a full size printed circuit layout in Fig. 4, along with the mechanical and drilling details of Fig. 5. Components are located per the overlay of Fig. 6.


Start construction with the jumpers, using sleeving where shown. Follow this up with the nine test points and

C1	220 pF polystyrer	10	
C2, 6, 8	270 pF polystyrer		
C2, 6, 8		ie	
	0.22 uF mylar	o OK for C11 12)	
C3, 11, 12	THE RESERVE OF THE PROPERTY OF	ks OK for C11, 12)	
C5	130 pF polystyren	ie .	
C7	.015 uF mylar		
C9	.0047 uF mylar		
C10	47 pF polystyrene	in the second second	
C13, 14	470 pF disk		
C15	.01 uF disk		
D1-9	1N4148 or equival be quality units.	lent silicon computer diode.	D1, D9 must
IC1	CG5004L-1 charac	cter Generator IC (STD Micro	osystems)
IC2	IM5600 or equival	ent 32 x 8 Bipolar Tri-state F	'ROM "SCAN"
IC3		ent 32 x 8 Bipolar Tri-state F	
IC4		Schmitt Trigger (Motorola)	
IC5		en collector inverter	
IC6	74LS04 LS TTL h		
J1, 2		Jack, Keystone 571	
R1, 15, 16	1.5k, 1/4 watt car		
R2	680 ohm,	"	
R3, 4	1k,	"	
R5	220 ohm,	"	
R6	3.3 Megohm,	"	
R7	150 ohm,	"	
R8	22 ohm,	,,	
R9	100 ohm,	"	
R10, 11	22k,	"	
R12		er potentiometer CTS U201	"CLARITY"
R13	100k,	"	"H POS"
R14	500k,	"	"V POS"
S1-3		vitch 3.17 mm pin centers	V 1 00
MISC:		and drilled per Fig. 4; Test Po	oint
WIISC.		Sockets, 24 pin (1), 16 pin	
		tor (Amphenol 225 or equiva	
	Sleeving; jumper		norre,
NOTE:		available from PAIA Electron	nice Roy
NOTE.		a City, OK, 37114:	iles, box
		ed and drilled, #TVT-6LB,	\$4.00
	Complete life	fall above parts #TVT CLV	
	Complete kit o	f all above parts #TVT-6LK	φου.υο Τ φου.υο
		Tested TVT-6L, #TVT-6LA	
	KTIVI Coded Ca	ssette, #TVT-6LC,	\$5.00

Complete Parts List, TVT-6L.



(a) DIRECT VIDEO MODS NEEDED FOR SHORTER LINE LENGTHS



(b) ADDITIONAL MODS THAT MAY BE NEEDED FOR 64 CHARACTER LINES

Fig. 7. Mods to TV set are greatly simplified thanks to already offset "TV" output on TVT-6L. DO NOT ATTEMPT DIRECT VIDEO ON A HOT CHASSIS (NO POWER TRANSFORMER) SET!

the low profile IC sockets, the switches, and the output phono jacks. Finally, add the resistors, pots, capacitors, and diodes. Be sure to note the polarity of each diode as it is added. Use fine solder and a small iron, and be sure to carefully double-check for any splashes or missed connections.

Software

Table I shows us some tested and workable KIM software. Program 1-A is the scan program for a 16 x 32 fully interlaced 512 character display that can be moved around as needed. Program 1-B is a dual program that you can set up as 25 x 64 or 13 x 64 fully interlaced displays with larger characters. Finally, Program 1-C gives us a four-in-one full performance scrolling cursor. 1-C accepts an external ASCII


keyboard on the parallel A inputs and works with any of the display formats by changing the key words as shown. This particular cursor system includes all the bells and whistles, such as full, rapid cursor motions in all directions, scrolling, erase to end of screen, and so on. It takes up most of page 01 in the KIM-1. You can easily make the cursor program longer for super fancy editing or shorter for a minimum sequential loading, per your choice.

Modifying your KIM

Table II gives you a complete listing of all pinouts on the TVT-6L along with the interface connections needed for either a KIM-1 or KIM-2 interface. The actual computer mods are outlined in Fig. 8. For the KIM-1, you add a connector along the top and make wiring pencil direct connections as shown. The foil is cut in ONE place along the 1K memory chip select line and a changeover switch is added. With the switch in the NORMAL position, the chip select is driven from KO as usual. In the TVT position, the chip select line is driven from the TVT's CSO line, which is a negative logic OR of KO and the TVT's scan access.

For larger displays, you'll need extra memory. Fig. 8b shows us the modifications for a KIM-2 memory. These mods first convert the KIM-2 decodings so that the KIM-2 works on the second, third, fourth, and fifth "K" of memory, or addresses 0400-13FF. Only addresses 0400 through 0FFF may be used for TVT page storage, although the remaining space is available for other computer use. The rest of the KIM-2 mods are similar to those on the KIM-1.

Even if you are going to use extra memory (who isn't?), convert the KIM-1 anyway as it is the simplest and best way to get started with your video displays. The changeover switch lets you run with the TVT-6L out of

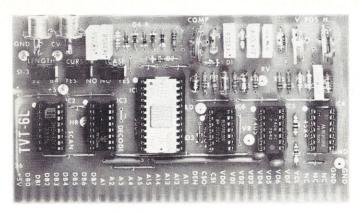

Closeup of TVT-6L module. Three of the six! ICs used are hex inverters. Switches give choice of line length, upper and lower case, cursor. Twin jacks give either monitor video or already-translated TV video. Both outputs are enhanced for minimum bandwidth needs. Module is adaptable to many popular microprocessors and microcomputers.


the socket. In one position, the computer works normally; in the other, it will work as a TVT or transparently so long as the TVT is in the socket and so long as memory locations 2000 to EFFF are not called.

TV Mods

The TV output with its +4 white bias level greatly simplifies your direct video interface. Fig. 7 shows how to "borrow" the headphone jack on a Panasonic T126A and convert it into an automatic video changeover switch. The only new parts needed are two short pieces of miniature coax. The sound trap is defeated by lifting the hot end of the 4.5 Megahertz crystal.

This type of conversion works on any small screen, solid state TRANSFORMER OPERATED portable B and W television set, so long as the set needs a bias voltage around +4 volts at the input to the first video stage.

In order to use the 64 character displays on an ordinary TV without extensive video bandwidth changes, the television's horizontal frequency is run much lower than normal, around 11 kHz. This means that you'll most likely need a width and hold modification for 64 or other long character lines. On the set shown, you can use a coil of 48 turns of #24 wire on a 1.27 cm diameter nylon form in series with the existing



The KIM-1 with a difference. Cable at top delivers enhanced video direct to your TV set or monitor.

width coil. A new hold mylar capacitor of one third the normal value, or .022 uF, is added in parallel to C409 to extend the hold range downwards.

Note that the reduced horizontal frequency and reduced width are only needed on 64 character lines. The shorter 32 character lines run at normal horizontal speed. This tradeoff buys us a lot in the way of being able to scan characters with the CPU in the first place and eliminates any need for video bandwidth extension, so it is well worth the simple and reversible mods needed. Clip-

on RF modulators can also be used as shown in the TV Typewriter Cookbook and Microprocessor Based Video Displays, again thanks to the reduced horizontal rate with long line lengths.

With any TV modification, be sure to have a SAMS photofact on hand and get expert help if you've never done a video input conversion before. NEVER ATTEMPT DIRECT VIDEO INTO A HOT CHASSIS OR TRANSFORMERLESS TELEVISION SET.


Initial Checkout

Always have a good oscilloscope on hand for your initial checkout, and always do your first check on a KIM-1 in the 16 x 32 utility scan program 1A mode. Don't worry about doing anything initially except displaying code that already happens

- 1. Add a new 36 pin, single readout connector along the top of the KIM-1 above the crystal. Small "L" brackets can be added to use existing holes.
- 2. Make short and direct wire connections as shown in Table II. Use a wiring pencil for all connections *except* +5 and GND, which should be short lengths of #18 wire.

Do not use ribbon cable or attempt extending the TVT-6L.

3. Break ONE foil run as shown, and add a DPDT changeover switch:




With the switch in the TVT position, operation is totally transparent so long as the TVT-6L is in its socket and addresses 2000-EFFF aren't called.

Fig. 8a. Modifying your KIM-1 for the TVT-6L.

- 1. Add a new 36 pin, single readout connector along the left edge of the card, the side away from the regulator. Small "L" brackets can use existing holes if one of the handle eyelets are replaced with a #6 screw.

 2. Make short and direct wire connections as shown in Table II. Use a wiring pencil for all connections except +5 and GND.
- 3. Break TWO foil leads as shown, and add a DPDT changeover switch:



Note that we now have a new input pin on Connector 5 that is driven by KIM-1 decodings K1, 2, 3, and 4 in parallel from Application connector C, D, E, and F.

We also have a new output pin on Connector 3 that provides a ground for the KIM-1 Decode Enable. This is connected to Application Connector K on an *unmodified* KIM-1 and to Expansion Connector 20 or a KIM-1 modified per Fig. 8a.

Note further that BD SELECTED output Connector 16 is not used.

These modifications cause your KIM-2 to respond to addresses

These modifications cause your KIM-2 to respond to addresses 0400-13FF. The program address switches are no longer used.

Fig. 8b. Modifying your KIM-2 for the TVT-6L.

PRIME RADIX

PRESENTS

64K_{TM}

WE DO IT WITH MIRRORS!

(and some very sophisticated state-of-the-art memory design)

65,536 BYTES

Your dream can be a reality with the Prime Radix Corporation's 64K_{TM} memory system at a very cost-effective price. And because it is a standalone memory system, you've got the advantage of greater flexibility not ordinarily available from add-in memory. Some of the features are:

- The 64KTM is fully buffered, presenting one TTL load to the memory bus.
- The 64KTM is digital group bus and ALTAIRTM bus compatible. When ordering, you must specify the bus architecture. A plugcard and cable will be furnished for the particular bus architecture you specify.
- The minimum complement of memory is 40K BYTES, with starting address locations at 0K, 8K, 16K, or 24K. Switchable memory protect is in increments of 8K bytes on 8K boundaries.
- The 64KTM comes assembled and tested with its own power supply, attractively housed in an aluminum cabinet, ready to

- plug into your system with a choice of a freestanding or a 19'' rack mountable cabinet, 5'' H x 18'' W x 14'' Deep.
- Psuedo-static operation: on board refresh clock-generator provides processor independent refresh with no wait states. The 300NS worst case access time enhances high speed operation.
- Power/fail detection circuitry and battery backup will provide non-volatile memory (batteries are optional at extra cost)
- The 64KTM has an expandable organization to other bit word lengths.

LIST PRICE IS AS FOLLOWS:

40K \$1490.00 48K \$1580.00 56K \$1670.00 64K \$1750.00

Delivery will be made in the same sequence as orders are received. Please allow 3 to 6 weeks for delivery. Mastercharge and BankAmericard are accepted.

PRIME RADIX, INC.
 P.O. BOX 11245
 DENVER, COLORADO 80211
 (303) 573-5942
 OR 433-5630

PF	COMPUTER SYNTHI	10155	X	☐ DIGITAL GROUP BUS ☐ ALTAIR TM BUS ☐ 64K @ \$1750.00 ☐ 56K @ \$1670.00 ☐ 48K @ \$1580.00 ☐ 40K @ \$1490.00	PRIME RADIX, INC P.O. Box 11245 Denver, Colorado 80211 (303) 573-5942 or 433-5630
	Print Name			☐ Check or M.O. enclosed	Credit Card Number
				☐ Charge BAC	
	Address			☐ Charge MC (Please No C.O.D.'s or P.O.'s)	4 Numbers Above Name (MC)Good Thru
City	State	Zip	NU		Signature P-13



Print Your Heart Out.

With help from the Digital Group, naturally.

Now, that small computer system you own or have been considering for personal or business use suddenly becomes a lot more usable—with the addition of a full-size *impact* printer from the Digital Group. A printer designed for small computers that need big output (like yours).

With the Digital Group printer, you can print your heart out...and it won't cost an arm and a leg. The Digital Group printer is available for less than \$500. That's right—\$500.

Just look at these specifications:

- Fast—120 characters per second
- 96 characters per line
- 12 characters per inch horizontal
- 6 lines per inch
- Makes up to 4 copies simultaneously
- Character set and pitch variable under software control—double width characters, etc.
- 5 x 7 character matrix
- Ribbon has built-in re-inkers for a life of 10,000,000 characters
- Paper can be either a standard 8½-inch roll, fanfold or cut page
- Interfaces to 8-bit parallel ports

There are lots of capabilities and outstanding features of the Digital Group printer...and (as always) the best news is our price. Kit prices start as low as \$495 for the printer and interface card. It simply can't be beat.

Find out all the facts about the Digital Group printer now. Just fill in the coupon below or give us a call for the details. We think you'll find a place for our printer in your system ...and in your heart.

111-		er_n	regrotters.	_	
the	010	1025	0	YOU U	7
	CILC	11401	911	CAU	0)

P.O. Box 6528 Denver, Colorado 80206 (303) 777-7133

Quick. I want to print my heart out. Send me all the details on your full-size impact printer.

Name ______Address _______City/State/Zip ______

D12 Please print.

to be on pages 02 and 03.

Center the three controls, switch to "32", cursor OFF and Lower Case OFF, plug the TVT-6L into your KIM-1, insert IC2 and IC3 only, and apply power. Go through the usual initialization, putting the KIM-1 in its binary mode with the interrupt returning you to keyboard operation. Then, try to operate the KIM-1 with a simple program on page zero to make sure the chip select and decode enable logic on the TVT-6L is passing things through properly and transparently.

Now, check address 2000 with your keyboard monitor. It should contain an A0. If it doesn't, stop immediately and find out why! Check the next 29 locations for more A0s followed by two 60s followed by another string of 30 A0s and so on. You should now be able to write and single step a simple program that will transfer control from KIM to TVT back to KIM again (see Example 1).

Your KIM-1 should start at 0000, jump to 2000, index sixteen times by twos to 201E, return to 0003 and stick there in the trap. Don't go on till the KIM and TVT can pass control back and forth to each other.

Next, add IC6 and check testpoints LD and CK with a decent scope. The waveforms should look exactly like Fig. 9. In particular, they should be clean and stable. The clock should have eight narrow positive clock pulses between load commands. Do not omit checking these waveforms.

Add the rest of the ICs,




Fig. 9. Key high frequency waveforms. Clock "CK" must be clean, jitter free, and have narrow positive duty cycle shown.


0000 Go to TVT 0003 JMP 4C 03 00 Trap Example 1.

Table I. Some software.

A. Program for a 16 line, 32 character per line Interlaced TVT-6L Raster Scan:

Upper Address (178A0

Displayed 0200-03FF uP - 6502Start - JMP 17A6 System - KIM-1 End - Interrupt Program Space 1780-17d4

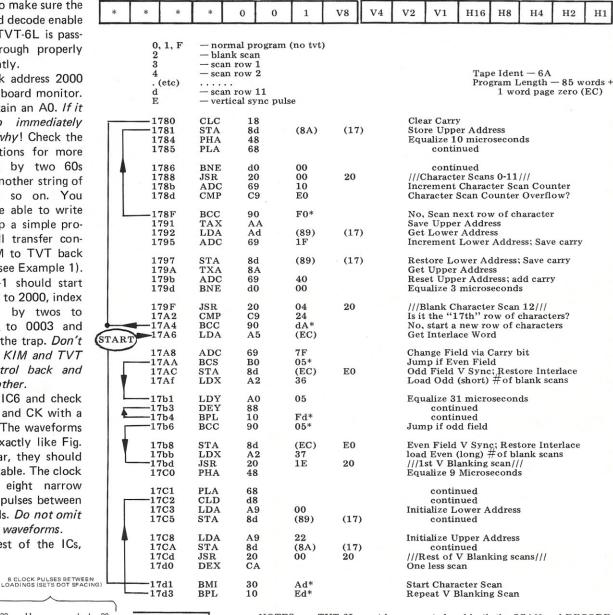

NOTES:

TVT-6L must be connected and both the SCAN and DECODE PROMs must be in circuit for program to run.

Lower Address (1789)

Both 17AC and 17b8 require that page 00 be enabled when page E0 is addressed. This is done automatically in the KIM-1 decode circuitry.

Location 00EC on page zero is reserved as an interlace storage

Step 1788 goes to where the upper address stored in 178A and the lower address stored in 1789 tells it to. Values in these slots continuously change throughout the program.

For a 525 line system, use 17b0 34 and 17bC 35 and a KIM-1 crystal of 992.250 kHz. This is ONLY needed for a video superposition or tilting applications; the stock 1 MHz

Normal program horizontal frequency is 15,873.015 kHz; Vertical 60.0114.63 microseconds per line, 264.5 lines per field; 2 fields per frame 529 lines total.


TVT-6L switch must be in the "32" position.

- () Denotes an absolute address that is program location sensitive.
- * Denotes a relative branch that is program length sensitive.

TO DISPLAY OTHER PAGES, USE:

PAGES DISPLAYED	17A3	1709	TVT CONNECTION
0000-01FF	22	20	KIM-1
0200-03FF	24	22	KIM-1
0400-05FF	26	24	KIM-2
0600-07FF	28	26	KIM-2
0800-09FF	2A	28	KIM-2
OA00-OBFF	2C	2A	KIM-2
OCOO-ODFF	2E	2C	KIM-2
OEOO-OFFF	30	2E	KIM-2

FOR HIGHER PAGES, MOVE CONTENTS TO 0200-03FF or 0400-05FF




B. Program for a 13 line or a 25 line, 64 character per line interlaced TVT-6L Raster Scan:

 $\begin{array}{ll} \mathrm{uP}-6502 & \mathrm{Start}-\mathrm{JMP}\ 17\mathrm{bF} \\ \mathrm{System}-\mathrm{KIM}\text{-}1,\ 2 & \mathrm{End}-\mathrm{Interrupt} \end{array}$

Displayed 04C0-0AFF Program Space 1780-17E2

			Upper A	Addre	ss 1788						Low	er Add	ress 1	787		
*	*	*	*	РН	PL	V8	V4		V2	V1	H32	H16	Н8	H4	H2	H1
			$\begin{cases} 0.1, & 1 \\ 2 \\ 3 \\ 4 \\ \dots & e \\ d \\ E \end{cases}$	tc .	- norm - blank - scan - scan - scan	scan row 1 row 2 		o tvt)		Pro	e Ident gram Le 1 word	ngth 9				
	Γ		1780 1782 1785 1786		LDA STA NOP ISR	A9 8d EA 20	((24) (88)	(17) 20		Store	e Uppe dize 2	r Add	ddress ress s 0-11/		
		L	1789 178b 178d 178F	I	ADC CMP BCC PHA	69 C9 90 48	I	20 E0 F3*			Is it	scan 12	or 13 t char	acter sc	55.	
			1790 1793 1795 1798	S	LDA ADC STA PLA	AD 69 8d 68	3	87) 3F (87)	(17) (17)		Incre	Lower . ement I ore L; s Upper V	L; Set save ca	C on V	2 Over	flow
			1799 179A 179d 179F	J	NOP ISR ADC CMP	EA 20 69 C9	4	OC 40 2b	20		///Bl Add		Reset	, 13/// Upper ine of c		
	1		17A1 17A3 17A5 — 17A7		BCC DA ADC BCC	90 A5 69 90	7	IF* EC) IF)F*			Get I Set C	nterlac	e Wor	ne of cl d Field Fi f Carry	inished	
			17A9 17AC 17AE 17b0		STA LDX LDA STA	8d A2 A9 8d	2	EC) E 24 81)	E0 (17)		Load	Even -	#VB S ren Up	eplace I Scans -2 per Ad	2	e
			17b3 17b5 	S	DA TA DY DEY	A9 8d A0 88	(2b A0) 97	(17)		Equa	contin	ued micro	aracter osecond		ompare
STAR	D -		— 17bb — 17bd ► 17bF 17C2	S	BPL BCS STA LDX	10 b0 8d A2	0	Fd*)F* EC))F	E0		Skip Odd		Field + Re	place Ir cans -2		
			17C4 17C6		DA TA	A9 8d		84 81)	(17)			lize Oc		per Add	iress	

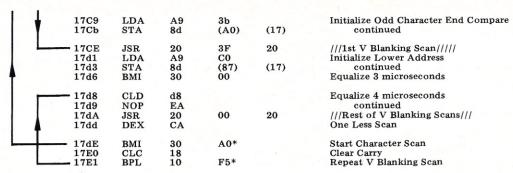

NOTES:

TVT-6L must be connected and both the SCAN and DECODE PROMS must be in circuit for program to run.

Both 17A9 and 17bF require that page 00 be enabled when page E0 is addressed. This is done automatically in the KIM-1 decode circuitry.

Location 00EC on page zero is reserved as an interlace storage bit.

Step 1786 goes to where the upper address stored in 1788 and the lower address stored in 1787 tells it to. Values in these slots continuously change throughout the program.

Values in slots 1781 (Upper address start) and 17A0 (Character end compare) alternate with the field being scanned.


Horizontal Scan Frequency = 11.494 kHz. Vertical frequency = 60.0222 Hertz. 87 microseconds per line 191.5 lines per field; 2 fields per frame, 383 lines total.

TVT-6L switch must be in the "64" position.

- () Denotes an absolute address that is program location sensitive.
- * Denotes a relative branch that is program length sensitive.

Program may be used for 13 x 64 large characters or 25 x 64 small characters by changing the following slots:

25 x 64
20
0E
24
2b
OF
34
3b



FLOWCHART 13 X 64 OR 25 X 64 INTERLACED SCAN NO. 68

C. Program for a Four-in-One full performance Scrolling Cursor:

uP - 6502 Start $-\overline{IRQ}$ System - Kim 1,2 End - RTI


Program Space 0100-01dF + Two words page zero (ED,EF)

Input to parallel Word A

0 A7 A6 A5 A4 A3 A2 A1 IRQ 10 usec.

Clear — CAN (18)
Carriage Return — CR (0d)
Cursor Up — VT (0b)
Cursor Down — LF (0A)
Cursor Left — BS (08)

Cursor Right — HT (09)
Cursor Home — SOH (0A)
Scroll Up — DC1 (11)
Erase To End —ETX (03)
Enter — all characters and all unused
CTRL commands

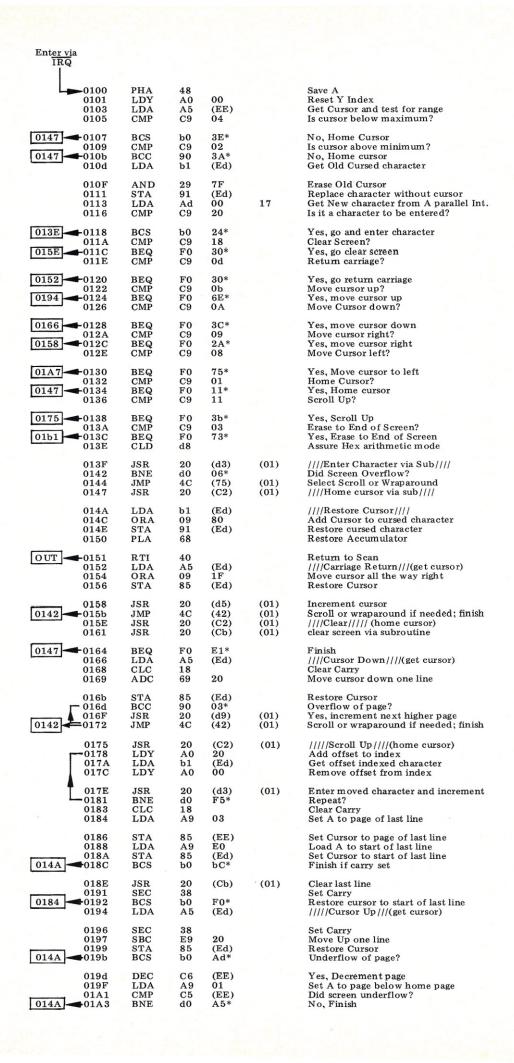

load program 1A, switch to single step off, jump to 17A6 and hit GO. Your first check should be that the program will run, returning to the keyboard monitor when you hit stop and picking up on go again. Addresses should always be within the program bounds of being somewhere between 2000 and EFFF or somewhere between 1780 and 17d3.

Check test point VR for a one microsecond pulse every 16.7 milliseconds. If your scope has trouble with low duty cycle waveforms, you can try pin 6 of IC4, which should be a one millisecond or so pulse every 16.7 milliseconds. For the acid test, switch to line sync. This pulse is your vertical sync pulse. It should wander around very slowly with respect to the power line sync. This pulse is created both by the hardware and your SCAN program. Stop right here till you have it there and stable.

Now, plug in your fully modified TV or monitor to the VID output, or else a Fig. 8 modified TV to the TV output. You should have a random but stable display of characters, along with some weird control symbols. Position them and sharpen them with the controls. CLARITY control makes the characters brighter in one direction and sharper in the other - pick what you like. At this point you should have a stable and attractive display. Use minimum contrast for sharpest characters.

The rest should be down-hill all the way. Check the LCASE switch and the CURSOR switch. Around half the characters should wink cursors at you, since the cursor recognizes any bit eight set as a cursor and since you have a random page load, rather than a page of characters with a single cursor location.

If everything checks out so far, you can now go on to longer character lines, external keyboards, cursor loading (don't forget to load the IRO

0147	01A5	BEQ	FO	A0*		V II
						Yes, Home cursor
	01A7	DEC	C6	(Ed)		///Cursor Left///(decrement cursor)
	01A9	LDA	A9	FF		Set A to page underflow
	01Ab	CMP	C5	(Ed)		Test for page underflow
019d	01Ad	BEQ	FO	(EE)		Change page if off page
	01AF	BNE	dO	99*		Finish if on page
	01b1	LDA	A5	(EE)		
				(EE)		////Erase to EOS///(get cursor)
	01b3	PHA	48			Save Upper Cursor location on stack
,	01b4	LDA	A5	(Ed)		Get Lower Cursor location
				(Ed)		
	01b6	PHA	48			Save Lower Cursor location on stack
	01b7	JSR	20	(Cb)	(01)	Clear to End of Screen
(01bA	PLA	68			Get lower cursor location off stack
(01bb	STA	85	(Ed)		Restore lower cursor
(01bd	PLA	68			Get upper cursor location off stack
	01bE	STA	85	(EE)		Restore upper cursor
	01C0	BNE	dO	88*		Finish
OITA	0100	DIVE	uo	88		r misn
(01C2	LDA	A9	00		///Subroutine-HOME CURSOR////
	01C4	STA	85	(Ed)		Set lower cursor to home value
	01C6	LDA	A9	02		Load A with home page value
	01C8	STA	85	(EE)		Set upper cursor to home page
	01CA	RTS	60			Return to main cursor program
	01Cb	LDA	A9	20		///Subroutine-ENTER SPACES///
					(01)	
	01Cd	JSR	20	(d3)	(01)	Enter space via character entry sub
(01d0	BNE	d0	F9*		Repeat if not to end of screen
	01d2	RTS	60			Determine to make a second
				(T) 1)		Return to main cursor program
	01d3	STA	91	(Ed)		///Subroutine-ENTER AND INCREMENT///
	01d5	INC	E6	(Ed)		Enter character and increment
(01d7	BNE	dO	06*		Overflow of page?
	01d9	INC	E6	(EE)		Yes, Increment cursor page
	01db	LDA	A9	04		Load A with page above display
V (01dd	CMP	C5	(EE)		Test for Overflow
	01dF	RTS	60			Return to main cursor program
	200 a C	100 NEW TOTAL				

vector!), and so on, but don't try too much at once. Always get the utility 512 character basic display up on a KIM-1 before trying anything fancy. Thanks to the total software control, once you are up and working and confident, there's practically no limit to how fancy you get with your display.

More details on all this will appear in *Microprocessor Based Video Displays*, along with such options as a Hex-ASCII converter that displays *Super Front Panel* Op-Code (your whole program at once — how's that for a debug aide?); color graphics options, use of different character generators, different microprocessors, and so on. Watch for it.

NOTES: For auto-scrolling use 0145 75. For wraparound, use 0145 47.

IRQ vector must be stored in 17FE 00 and 17FF 01.

Total available stack length is 32 words. Approximately 16 are used by operating system, cursor, and scan program. Stack must be initialized to 01FF as is done in KIM operating system. For 30 additional stack locations, relocate subroutines starting at 01C2 elsewhere. For total stack availability, relocate entire program elsewhere.

To protect page, load 00F1 04. To enable entry, load 00F1 00


Cursor address is stored at 00Ed low and 00EE high on page zero.

To display cursor, load 014d 80. To not display cursor, load 014d 00 $\,$

- * Denotes a relative branch that is program length sensitive
- () Denotes an absolute address that is program location sensitive $% \left(1\right) =\left(1\right) \left(1\right)$

To match this program to the scan program, change the following slots:

	16 x 32 KIM1 0200-03FF	16×32 KIM2 0400-05FF	$13 \times 64 \\ KIM2 \\ 04C0-07FF$	25 x 64 KIM2 04C0-0AFF
0106	04	06	08	0b
010A	02	04	04	04
0155	1F	1F	3F	3F
016A	20	20	40	40
0179	20	20	40	40
0185	03	05	07	0A
0189	EO	EO	CO	CO
0198	20	20	40	40
01A0	01	03	03	03
01C3	00	00	CO	CO
01C7	02	04	04	04
01dC	04	06	08	0b
	010A 0155 016A 0179 0185 0189 0198 01A0 01C3 01C7	KIM1 0200-03FF 0106 04 010A 02 0155 1F 016A 20 0179 20 0185 03 0189 E0 0198 20 01A0 01 01C3 00 01C7 02	KIM1 0200-03FF 0400-05FF 0106 04 06 010A 02 04 0155 1F 1F 016A 20 20 0179 20 20 0185 03 05 0189 E0 E0 0198 20 20 01A0 01 03 01C3 00 00 01C7 02 04	KIM1 KIM2 KIM2 0200-03FF 0400-05FF 04C0-07FF 0106 04 06 08 010A 02 04 04 0155 1F 1F 3F 016A 20 20 40 0179 20 20 40 0185 03 05 07 0189 E0 E0 C0 0198 20 20 40 01A0 01 03 03 01C3 00 00 C0 01C7 02 04 04

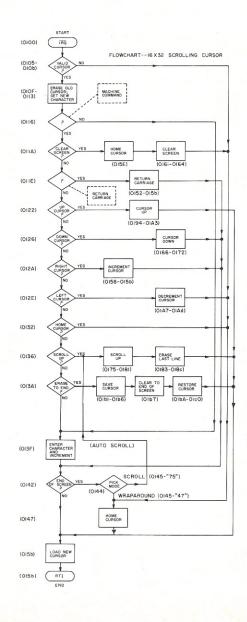

Pin	Ident	Function	Load	8-A KIM-1 Connections	8-B KIM-2 Connections
1, 2* 3, 4, 5 6*	GND NC VCL	Ground Return — Heavy foil or wire No Connection — reserved Video Clock Ø2	_ _ 1 LSTTL	Expansion 22 Expansion U	Connector 1 Pin 4 of U10
7	VD7	Cursor from Display memory	1 LSTTL	Pin 12 of U5	Pin 2 of U3
8 9 10 11	VD6 VD5 VD4 VD3	ASCII Bit 7 from Display memory ASCII Bit 6 from Display memory ASCII Bit 5 from Display memory ASCII Bit 4 from Display memory	1 NMOS 1 NMOS 1 NMOS 1 NMOS	Pin 12 of U6 Pin 12 of U7 Pin 12 of U8 Pin 12 of U9	Pin 6 of U3 Pin 10 of U2 Pin 2 of U2 Pin 6 of U2
12 13 14 15*	VD2 VD1 VD0 CSI	ASCII Bit 3 from Display memory ASCII Bit 2 from Display memory ASCII Bit 1 from Display memory Chip Select from Enable Decoding	1 NMOS 1 NMOS 1 NMOS 1 LSTTL	Pin 12 of U10 Pin 12 of U11 Pin 12 of U12 Pin 1 of U4	Pin 10 of U1 Pin 2 of U1 Pin 6 of U1 Pin 4 of U11
16* 17* 18 19	CSO DEN A11 A12	Chip Select to Display Memory Decode Enable to KIM No Connection — reserved Address Line 12	TTL Out TTL Out - 1 LSTTL	Pin 13 of U5-U12 Pin 12 of U4 — Expansion P	Pin 2 of U6 Connector 3 — Connector R
20 21 22 23	A13 A14 AB15 A5	Address Line 13 Address Line 14 Address Line 15 Address Line 5	1 LSTTL 1 LSTTL 1 LSTTL 1 LSTTL	Expansion R Expansion S Expansion T Expansion F	Connector S Connector T Connector U Connector H
24 25 26 27*	A4 A3 A2 A1	Address Line 4 Address Line 3 Address Line 2 Address Line 1	1 LSTTL 1 LSTTL 1 LSTTL 1 LSTTL	Expansion E Expansion D Expansion C Expansion B	Connector F Connector E Connector D Connector C
28 29 30 31	DB7 DB6 DB5 DB4	Data Bus 7 Data Bus 6 Data Bus 5 Data Bus 4	TTL TS Out TTL TS Out TTL TS Out TTL TS Out	Expansion 8 Expansion 9 Expansion 10 Expansion 11	Connector 8 Connector 9 Connector 10 Connector 11
32 33 34 35	DB3 DB2 DB1 DB0	Data Bus 3 Data Bus 2 Data Bus 1 Data Bus 0	TTL TS Out TTL TS Out TTL TS Out TTL TS Out	Expansion 12 Expansion 13 Expansion 14 Expansion 15	Connector 12 Connector 13 Connector 14 Connector 15
36*	+5V	+5 Volt Supply	200 ma	Expansion 21	Connector Y


NOTES: (See * Above)

Pins 1, 2	 Ground should be heavy foil or #18 wire — all other connections are wire pencil short leads. Do not use ribbon cables or attempt extension.
Pin 6	 Video clock must load character generator only when data output is stable and valid. Clock Ø2 on the KIM.
Pins 15, 16	 Chip select line from decoding to display memory is broken by cutting the foil and then replaced with a negative logic OR (positive AND) of the original chip select and the TVT chip select. See Figure 8b.
Pin 17	 Decode Enable output goes low when TVT is not scanning goes high otherwise. Decoding must be disabled during active scans to allow SCAN memory access to data buss. See Figure 8b.
Pin 27	 Address line A0 is not used in the TVT module as the SCAN memory indexes every second microsecond. A0 is used in the display memory addressing.
Pin 36	 +5 power borrowed from computer. Extra noise on the +5 line will cause skewed or akward characters; may be fixed usually with extra bypassing. Use heavy foil or #18 wire.

WHO OFFERS THE GREATEST VARIETY OF S-100 BUS-COMPATIBLE INTERFACES ???

NOT MITS, NOT IMSAL, NOT PROCESSOR TECHNOLOGY ----- BUT MINI MICRO MART!

SUPER VALUE \$100 Z80 CPU BOARD

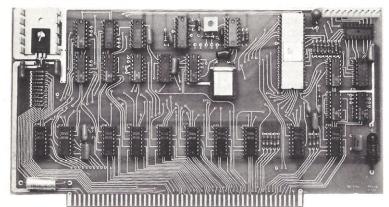

Illustrated above is the Digital Innovations' S-100 Z-80 CPU board, functionally equivalent to the TDL ZPU ----- ONLY \$169.95 in kit form.

Now you can trade your Altair or IMSAI CPU board for an S-100 bus-compatible Z-80 CPU board. Mini Micro Mart makes available both the ZPU board from TDL or a very similar CPU board from Digital Innovations. Ease the burden of updating your 8080 system -----trade with Mini Micro Mart. We will allow \$70 for your Altair CPU or \$90 for your IMSAI CPU (condition subject to inspection) towards the purchase price of \$269.00 for the TDL ZPU or \$169.95 for a Digital Innovations Z80-S100 CPU board. Add \$50 for assembled and tested Z-80 CPU Boards.

WE BUY AND SELL USED ALTAIRS AND IMSAI's. Trade your Altair for an IMSAI or for a MINI MICRO MART system. Many like-new, assembled, tested systems available.

YOUR CHOICE \$ 49.95

 2708 PROM BOARD (10K) -- Kit w/basic IC sockets. Any PROM addressable anywhere in memory map. Order as C80-2708-2.

NOTE: Factory Prime 2708's, 1K x 8 erasable PROM's, REG. \$98 ------ NOW ONLY \$49.95, with IC socket

2. 2K-1702A PROM BOARD -- Kit w/basic IC sockets. Any PROM addressable anywhere in memory map. Order as C80-I702-2.

FACTORY PRIME 1702A \$8.95

- 2-PORT PARALLEL I/O BOARD -- Latching inputs and outputs. Order as C80-P I/O.
- SERIAL I/O BOARD -- Kit uses UART, software addressable baud rates. Order as C80-S I/O.

AUDIO CASSETTE INTERFACE ADAPTER for above (Byte Standard) Add \$19.95.

Any of above boards only \$49.95 in kit form; available assembled and tested at \$40 additional per board.

ALSO AVAILABLE: 4 styles of prototype boards, extender board, 2 backplanes, connectors, power transformers, scientific calculator board, audio cassette board, digital cassette interface board, adapter boards, and others.

MEMORY BOARDS ALTAIR/IMSAI/SOL

C80-4K-300S Kit with 4K of 2102's	\$79.95
C80-4K-300LP Kit w/4K of 91L02A's, LP 500ns, w/IC sockets	\$ 99.95
C80-4K-350LP Kit w/4K of 91L02C's, LP 300ns, w/IC sockets	\$129.95

16K STATIC MEMORY BOARD -- Kit uses EMM 4200's, 250ns, extreme LP, w/IC sockets (very similar to MITS board). Order C80-16K-300 \$479.95


MiniMicroMart

1618 James Street, Syracuse, N.Y. 13203, Phone: (315) 422-4467

SCIENTIFIC CALCULATOR S-100 BOARDS

MINI MICRO MART has introduced a completely new scientific calculator board for the S-100 system, using the MOS Technology 7529-103 calculator chip; greatly reduces software overhead for all mathematical computations. Complete with software, in kit form, order as C80-SCI-300 at \$ 99.95 or assembled and tested as C80-SCI-500 at \$ 149.95.

16K S-100 MEMORY BOARD ----




EXPANDER/EXTENDER BOARDS

EXPA, 4-position Expander Boar	rd \$10.95
EXPA-4 w/4 connectors "	34.95
EXPB, 9-position " "	17.95
EXPB-9, w/4 connectors "	41.95
Extender Board, w/connector	24.95

NEW S-100 bus-compatible VIDEO INTER-FACE KIT, 16x32 or 16x64, upper & lower case, and limited graphics; software includes cursor control, graphics and scrolling, etc. Uses low-power memory.

Order as C80-VBA at \$149.95. (Assembled & tested, add \$50.00.)



Illustrated above is our 10K 2708 Board (C80-2708).

New IMSAI and other S-100 kits and assembled units available from MINI MICRO MART. Write for price quotations; include stamped, self-addressed envelope.

Inquire about our special Boot Strap PROM Board for Altairs and IMSAI's for only \$34.95, includes encoded PROM's. Send SASE.


Add \$1.50 per board for shipping, handling & insurance. IC socket sets available – not included unless specified.

SURPLUS CATALOG -- send self-addressed, stamped envelope and specify SURPLUS CATALOG in lower left-hand corner of envelope.

M6

The BYTEDESTROYER


... review of an EPROM eraser

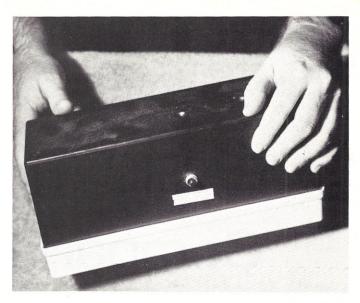


The BYTEDESTROYER.

In a conversation with Ray Lvn, owner of the Byte Shop, whom Don mentions in the following article, I found out several facts which will be of interest to anyone reading it. First, Ray said that instructions certainly should have been included and apologizes for their omission. Second, he mentioned that a table of exposure time shouldn't be necessary because 30 minutes is adequate for any and all EPROMs. And last, but not least, his store is no longer in Campbell California (due to two too many burglaries!). The new address is 2626 Union Avenue, San Jose CA

95124. - John.

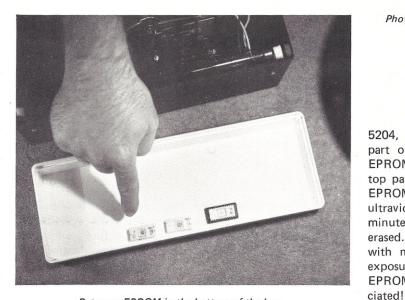

Put your EPROM in the bottom of the box.

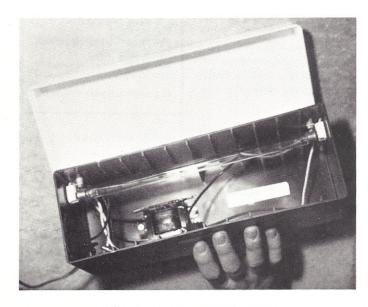

A few parts in a two piece plastic box.

Don Parks 1039 Ivy Lane Cary, NC 27511

he BYTEDESTROYER is used for erasing ultraviolet Erasable Programmable Read-Only Memories (EPROM) and is sold by the BYTE Shop in Campbell, California. I ordered mine mail order from the BYTE Shop for \$37.50 (plus postage). What you get for your money is a few parts in a two part plastic box. You put your EPROM (1702A, 5203,

5204, etc.) in the bottom part of the box (up to 48 EPROMs at a time), place the top part of the box over the EPROM, and switch on the ultraviolet light. Six to ten minutes later, your EPROM is erased. No instructions came with my unit — a table of exposure times for various EPROMs would be appre-

Photos by R.P. (Bob) Jones

Looking into the top cover of the BYTEDESTROYER, you note there is a General Electric type G8T5 ultraviolet lamp, a switch, and a ballast transformer - really not much to it. In operating the unit, I have often had to operate the power switch several times to get the lamp to start (turn on). Just below the switch there is a label warning: "Protect your eyes from tube rays" (in other words - don't look at the lamp when it is on or you will get sunburn of the eyeballs!).

In conclusion, the BYTE-DESTROYER erases EPROMs as advertised. I consider the unit overpriced even though it's the least expensive I've seen. If I had it to do over, I'd still buy it.

Tom Rugg 1115 N. Beverly Glen Blvd. Los Angeles CA 90024

Phil Feldman 1722 Brockton Ave. #10 Los Angeles CA 90025

BASIC Timing Comparisons

... information for speed freaks

This is probably one of the most comprehensive execution speed comparisons of the various BASICs available to the hobbyists you've ever seen. Tom and Phil obviously put a lot of effort into the article and I'm sure you'll find their results as interesting as I did.

A side note concerning Imsai BASIC is in order. Imsai has recently released a new version of their 8K BASIC (Version 1.4) which will not only have additional features such as PEEK and POKE, and the ability to CALL assembly-language routines, but will also overcome the problems mentioned in this article. And in addition, they have a new Disk BASIC compiler which should be of interest to a lot of people. — John.

* Also note addendum following this article — Ed.

f you hang around any gathering of computer hobbyists long enough, pretty soon the subject of relative speeds of different microprocessor chips will come up. How fast is the 8080 compared with the 6800 and 6502 (or whatever else is the favorite of someone there)? How much faster is the Z-80 than the 8080?

Sure, there will always be someone who will start rattling off the number of microseconds it takes to execute the fastest and slowest instructions, but how much does that really tell you? After all, which instructions will you really be using the most?

If you hang around a little longer, some people (maybe the same ones) will start making some very authoritative sounding statements about who has the "best" and "fastest" BASIC interpreter on their micro. They may

even talk about how they've compared their own BASIC with another one and "proved" that theirs was "almost twice as fast."

Well, we've been curious about this ourselves, and we thought it was about time that someone came up with some comparisons of the speeds of the various BASICs that were a little bit more precise than this. We didn't hear any volunteers speak up, so we did it ourselves. Some of the results were *very* surprising.

How Can You Compare BASIC Speeds?

We decided to write some simple "benchmark" programs in BASIC and then go around and run them on every microcomputer BASIC we could find. With the aid of a trusty stopwatch and an agile thumb, we timed each run to the nearest tenth of a second and then compiled and evaluated the results.

300 PRINT"START" 400 FOR K=1 TO 1000 500 NEXT K 700 PRINT"END" 800 END

Fig. 1. Benchmark Program 1.

300 PRINT"START"
400 K=0
500 K=K+1
600 IF K < 1000 THEN 500
700 PRINT"END"
800 END

Fig. 2. Benchmark Program 2.

300 PRINT"START"
400 K=0
500 K=K+1
510 A=K/K*K+K-K
600 IF K < 1000 THEN 500
700 PRINT"END"
800 END

Fig. 3. Benchmark Program 3.

300 PRINT"START"
400 K=0
500 K=K+1
510 A=K/2*3+4-5
600 IF K < 1000 THEN 500
700 PRINT"END"
800 END

Fig. 4. Benchmark Program 4.

300 PRINT"START"
400 K=0
500 K=K+1
510 A=K/2*3+4-5
520 GOSUB 820
600 IF K < 1000 THEN 500
700 PRINT"END"
800 END
820 RETURN

Fig. 5. Benchmark Program 5.

300 PRINT"START"
400 K=0
430 DIM M(5)
500 K=K+1
510 A=K/2*3+4-5
520 GOSUB 820
530 FOR L=1 TO 5
540 NEXT L
600 IF K < 1000 THEN 500
700 PRINT"END"
800 END
820 RETURN

Fig. 6. Benchmark Program 6.

300 PRINT"START"
400 K=0
430 DIM M(5)
500 K=K+1
510 A=K/2*3+4-5
520 GOSUB 820
530 FOR L=1 TO 5
535 M(L)=A
540 NEXT L
600 IF K < 1000 THEN 500
700 PRINT"END"
800 END
820 RETURN

Fig. 7. Benchmark Program 7.

Before we go any further, however, let's take a quick look at what a benchmark is, and what it can and can't tell us.

What's a Benchmark?

A benchmark to a computer person is obviously not quite the same thing as it is to a carpenter, who can make physical marks on his workbench for measurement purposes. But, just as a carpenter needs methods of measuring the lumber he's working with, the computer person needs ways of measuring the capacity of the computer hardware and software he's evaluating (and maybe even considering buying).

The way this is generally

done is by running some carefully selected programs (benchmark programs) on each of the computer systems being considered. By comparing the amount of time it takes each system to run them, you can make a pretty good estimate of how much faster one system is over another for the kind of work you tested.

Notice that last qualification. If one guy runs his benchmark programs on system X and system Y, and concludes that system X is 23 per cent faster, that doesn't mean that system X is 23 per cent faster for everything. Maybe he was testing his set of statistical calculation programs, while some other guy

would want to know how the two systems compare with some text-processing programs, for example. Maybe system X is great at "number crunching" (square roots, trig functions, etc.) but terrible at string manipulation.

The whole point of this is that you have to run benchmarks that reflect the kind of work that you plan to do if you expect the results to really tell you anything worthwhile. We tried to come up with some simple programs that would be somewhat representative of what a lot of computer hobbyists frequently do in the programs they write. If you do greatly different things in your programs, you'll need to run

your own benchmarks, of course. But ours should give you a good general idea of how the different BASICs stack up, and you'll have a good starting point for coming up with your own benchmarks.

Another thing to keep in mind is that we're really testing the speed of the hardware and the software in conjunction with each other. If you have the fastest and most flexible CPU in the world, but you're running a badly written BASIC on it, it's not going to measure up too well. The same is true of a beautifully written BASIC on a poorly designed CPU. As a result, when our results show a certain BASIC on a certain

					Benchmark	Number		
	Software/Hardware	1	2	3	4	5	6	7
	1. TRW Expanded BASIC/							
	Control Data Cyber 174	.08	.07	.15	.15	.24	.80	1.04
	*2. 6K Integer BASIC/Apple	1.3	3.1	7.2	7.2	8.8	18.5	28.0
	3. Zapple 8K BASIC (1.1)/							
	Altair 8800a, TDL ZPU @ 2 MHz	1.7	9.5	20.6	21.7	23.7	36.2	51.8
	4. Altair 8K BASIC (4.0)/							
	Altair 8800b	1.7	10.2	21.0	22.5	24.3	36.7	52.4
	5. Altair 8K BASIC (3.2)/							
	Altair 8800a	1.7	10.3	21.4	23.1	24.8	37.3	52.8
	6. Altair 8K BASIC (3.0)/							
	Imsai 8080	1.6	10.6	22.0	23.7	25.4	38.3	57.1
(tie)	7. Digital Group Z-80 Maxi-BASIC							
	(1.0)/Digital Z-80 @ 2.5 MHz	1.8	7.5	21.2	25.1	26.9	40.3	58.5
(tie)	Altair 12K Extended BASIC							
	(4.0)/Altair 8800b	1.9	7.5	20.6	20.9	22.1	37.0	58.5
(tie)	Altair Disk Extended BASIC							
	(4.0)/Altair 8800b	1.9	7.5	20.6	20.9	22.1	36.9	58.5
	Altair 12K Extended BASIC							
	(3.2)/Altair 8800a	1.9	8.9	21.8	23.0	24.8	39.3	60.7
	11. Altair Disk Extended BASIC							
	(3.4)/Altair 8800b	1.9	8.8	21.7	22.8	24.7	39.6	61.6
	12. Altair 4K BASIC (4.0)/							
	Altair 8800b	1.9	15.1	26.0	28.9	31.7	44.5	62.1
	13. Compal-80 10K BASIC/	0.0		00.4	04.0	00.0	40.4	05.7
	Compal-80	2.0	9.3	23.4	24.6	26.3	42.1	65.7
	14. Process Technology BASIC 5/	2.0	10 5	07.5	20.0	22.2	E1 0	67.4
	Digital Group 8080 15. Compucolor 8K BASIC/	3.6	10.5	27.5	30.9	33.2	51.3	67.4
	•	2.1	13.1	27.0	29.0	31.3	47 E	67.8
	Compucolor 8001 16. Digital Group 8080 Maxi-BASIC	2.1	13.1	27.0	29.0	31.3	47.5	67.8
	(1.0)/Digital Group 8080	2.2	9.2	26.4	31.2	33.5	49.9	72.3
	17. Altair 680 8K BASIC (3.2)/	2.2	5.2	20.4	31.2	33.3	49.9	12.3
	Altair 680b	2.5	16.3	30.7	33.4	36.3	55.9	81.8
	*18. Programma TBX (1.1)/	2.0	10.0	30.7	00.4	50.5	55.5	01.0
	Sphere 330	2.9	34.8	55.6	60.5	73.5	101.1	159.8
	19. Imsai 8K BASIC (1.3)/	2.0		00.0		,		
	Imsai 8080**	7.1		44.1	56.2		105.7	194.9
	*20. Programma TBX (1.2)/							
	Sphere 330	3.1	41.2	68.3	72.2	85.3	115.3	202.8
	21. Southwest Tech 8K BASIC (1.0)/							
	SWTPC 6800	14.9	24.7	96.1	105.3	109.8	174.1	204.5
150								
*	**22. Imsai 8K BASIC (1.31)	7.5	28.2	66.4	78.5	88.1	140.1	235.6
	*Integer PACIC only							

^{*}Integer BASIC only.

^{**}Some benchmarks could not be run. Others are incomplete.

^{***}Results for Imsai 8K BASIC, Version 1.31, from tests conducted by Tom Rugg after article submitted for publication.

CPU to be exceptionally fast (or slow), we don't really know how much of that is due to the hardware and how much to the software. We can draw some conclusions, though, by comparing how different versions of BASIC do on the same CPU.

One more thing. There are lots of factors that go into deciding which BASIC and which computer are best for you. We're just looking at the speed of some small programs. Large programs (with lots of variables to look up in internal tables) might come out different. You also have to consider cost, availability, reliability, support by the vendor, number of digits of accuracy, ease of use, compatibility with other hardware and software, loading time, special features, and other miscellaneous factors. Speed may not be important to you. But if it is, read on.

The Benchmark Programs

By now you've probably already sneaked a look at the table of benchmark timings, so we'd better explain each of the benchmark programs. Remember, there's nothing magic about these programs. They're just some that we made up so they would be short and simple and would test the speed of certain features of BASIC that we thought were important.

All the benchmark programs print "START" at the beginning and "END" at the end. The length of time between the two is what we measured.

The first benchmark is nothing but a simple FOR-NEXT loop. All it does is make the variable K go from one to a thousand. Ever wonder how long something like this would take? Depending on which micro's BASIC we used, it took anywhere from 1.3 seconds to 14.9 seconds. Quite a spread.

The second benchmark program does the same thing (logically), but in a different way. Instead of using a FOR-NEXT loop, we set K equal

to zero, add one to it, and check to see if we've reached 1000 yet. If not, we go back and add one again. Since this does the same thing as the first benchmark, it should take about the same amount of time, right? Wrong! It takes an average of about five times as long. There's a lesson to be learned here.

The second benchmark is used as a basis for all the rest of the benchmarks. What we do is continually add more and more statements between lines 500 and 600. These statements will be executed 1000 times, and we can see how much time is added by adding each statement. That way we can figure out which BASICs are most efficient at each type of statement. In addition, the last benchmark will have a variety of types of statements in it, so we can use it as our measure of how fast each BASIC is overall.

The third benchmark adds statement 510 to the program. It does a divide, a multiply, an add, and a subtract — using variables only. We did this because some of the BASIC manuals tell you to use variables instead of constants to make your program run faster. If so, this benchmark should run faster than one that was doing these operations with constants, right?

The fourth benchmark provides the answer. It replaces statement 510 with one that does the same operations, but uses one-digit constants instead. Sure enough, the program runs longer this way on nearly all the micro BASICs.

Benchmark number 5 adds statements 520 and 820. All they accomplish are a simple GOSUB to a dummy subroutine that does nothing but RETURN. We were curious how long it took to do this, since it is a common programming technique (and a good one, we feel) to break up a program into a series of subroutines and GOSUB to them from a mainline routine.

The sixth benchmark has some interesting aspects, but it's mostly a preparation for the next one. It adds statements 430, 530 and 540. It creates the array M and does a five-time FOR-NEXT loop for each of the thousand times in outer loop. This tests a different condition than the first benchmark, which is also a FOR-NEXT loop, because this one executes a small inner loop a thousand different times. Initializing a small loop one thousand times is quite a bit different from initializing a large loop once (as Benchmark 1 did).

The last benchmark (number 7) adds statement 535. This tests the amount of time it takes to place a value in an array. Since arrays are so frequently used by so many programs, it's important to know how long it takes BASIC to figure out which element you're referring to (the "L-th" one here) and then put a value into it (A). Notice that we're executing this statement 5000 times.

The BASICs That Were Tested

We ran the benchmarks on just about every BASIC we could get our hands on for a few minutes. We went around to computer stores, hobbyist meetings, friends' houses — wherever new BASICs could be found. It seemed sort of like stamp collecting after a while. "Ah! Here's one we haven't found before!"

We even tried them on a super computer, a Control Data Cyber 174. We had to use its internal clock (our reflexes and stopwatch weren't quite good enough). It's interesting to see how the big guy compares with all the little guys. In addition, since it's a lot faster than all the micros, this will prevent anybody else from claiming he came out on top in our benchmark.

When possible, we tried to run somebody's BASIC on his own machine. We ran Altair BASIC on an Altair, South-

west Tech BASIC on a Southwest Tech machine, etc. In some cases, we couldn't do this, simply because we couldn't find anyone with the right machine, or the machine doesn't exist. So, we ran Processor Tech's "BASIC 5" on a Digital Group 8080 system, and Programma's TBX (Tiny BASIC Extended) was run on a Sphere 330 (a 6800-based machine). TDL's Zapple BASIC was run on an Altair 8800a with a TDL ZPU board in it. By the way, did you know that neither the TDL ZPU nor the Cromemco Z-80 board will work in an Altair 8800b? This fact hasn't been given too much publicity, as far as we've seen.

Note that some of the BASICs are marked with an asterisk in Fig. 8. These are the ones that only handled integers (no floating point). For a while we considered eliminating them from our results, since they obviously have an advantage in processing speed. But when we saw how some of them came out in the standings, it didn't look like it was necessarily as much of an advantage as we expected.

In glancing down the list of BASICs that were tested, a couple of things are quickly noticeable. First, we tested more versions of Altair BASIC than anything else. The reason for this is pretty simple. More people used it than any other BASIC we ran into, and more versions of it exist than any other.

The second thing is that we obviously didn't test every version of microcomputer BASIC that exists. Sorry, but we just couldn't arrange to test some of them. If you have one we didn't test (and you live in the Los Angeles area), let us know and we'll set up a test with you. If there's enough interest, we can publish an update in a later issue. That'll also give all the vendors a chance to come out with some new versions BASIC that perform better. After all, isn't that what we really want to get

out of all this?

Imsai BASIC

A special explanation is required for Imsai BASIC, especially since so many people seem to have (and like) Imsai computers. Benchmark 1 was the only one that we could run the same way as on other versions of BASIC. Benchmarks 2 and 5 could not be run at all. The rest of them were run in an *incomplete* way.

Here's what happened. We went around to four different Imsai dealers to try to run the benchmarks with Imsai BASIC. One of them said, "It doesn't work." Another said his people had tried a couple of times without success and then gave up. The third worked with us to try to bring it up and partially succeeded. We could enter programs and run them, but they really didn't do anything. All variables were stuck at zero and couldn't be changed, and we were getting strange errors for no apparent reason.

The fourth dealer had more success. We were able to run our BASIC programs, but certain things didn't work. Specifically, any kind of branch instruction (GOTO, GOSUB, etc.) wouldn't work! He said the same thing had happened before. To say the least, this is a pretty severe programming restriction. As a result, we couldn't run benchmarks 2 and 5 at all. Benchmark 3 had to be done with a FOR-NEXT loop (like benchmark 1), as did all subsequent benchmarks. Benchmarks 6 and 7 didn't have the **GOSUB-RETURN** statements in them.

Imsai's documentation says that this version of 8K BASIC (1.3) is a "preliminary" one. Considering its extremely slow speed (it takes over twice as long as the next slowest 8080 BASIC) and the fact that many people are having problems getting it to work, we hope they can come out with a final version to replace it

pretty fast.

The Hardware That Was Tested

There were four microcomputer chips represented in the benchmarks. Apple (not Zapple) uses a 6502. Southwest Tech, the Altair 680b, and the Sphere use the 6800. The TDL ZPU and the Digital Group Z-80 use the Z-80. All others use the 8080.

We made sure that no slow memory was used. All machines were thought to be running at their full rated speeds by their owners. If you run these benchmarks on your machine and discover significant differences between your results and ours, we'd like to hear from you. Please be sure that you enter the programs exactly as they are shown (spacing is a factor in BASIC's speed, you know). We would hope that your results would be within one percent of ours.

The Results

Now that we've talked about what we were trying to do and how we did it, let's finally take a look at the results to see what we can conclude. Remember, we're looking at the times for benchmark 7 as our overall measurement.

First of all, there's absolutely no question that BASIC on the Control Data Cyber 174 came out on top. If you have a few million dollars in loose change rattling around in your pocket, go out and get one.

To tell the truth, we were surprised that there wasn't a bigger difference between number one and the rest of the field. Apple BASiC only took 27 times as long as the CDC, and about half the field finished in less than 60 times as long. We expected a much larger gap here.

Speaking of Apple BASIC, look how far in front of the rest of the micros it came out. Sure, it's an integer BASIC, but that's still an awfully impressive performance. Some other integer

BASICs finished down near the bottom. Apple expects to have a BASIC with floating point available by about July. It'll be interesting to see how much it slows down.

After Apple comes a cluster of Z-80 and 8080 BASICs. TDL's Zapple 8K BASIC just barely came out in front of Altair 8K BASIC (versions 4.0 and 3.2). TDL's ads claimed that it was "20% faster than Altair." Our benchmarks show that it's only a little over one per cent faster than the fastest Altair BASIC, and it's slower at some things (look at benchmark 2). It is nearly 20 per cent faster than the slowest Altair BASIC (4K, version 4.0). Keep in mind, though, that if we had run another set of benchmarks (maybe with a lot of string processing or square roots or something), it might have turned out that we agreed with TDL.

Most of the 8080 and Z-80 BASICs came out in the 50 to 70 second range. Digital Group's Z-80 Maxi-BASIC is an interesting case. Even though it uses the Z-80 and runs at 2.5 MHz, it still finished behind several others. (Zapple ran at 2 MHz, as do all the 8080 based computers.)

We were also sort of surprised that there wasn't more variation in the speeds of the 8080 and Z-80 BASICs. They all finished within about 20 seconds of each other (except Imsai's). All the Altair versions came out looking pretty good, but the others weren't really very far behind. By the way, you can observe that Altair 12K Extended BASIC and Disk Extended (4.0)BASIC (4.0) have almost identical timings right down the line. That tells us that they are probably similar. The 8K version is obviously quite a bit different.

All of the 6800-based BASICs are down at the bottom of the list. Here we see a wide variation in timings. Altair 680 8K BASIC took 81.8 seconds — about

30 to 40 per cent slower than the average 8080 BASIC (nearly 60 per cent slower than the fastest). But Altair's 680 BASIC looks great compared with the other 6800 BASICs. The two TBX versions (and both are integer BASICs, remember) took 2 to 2½ times as long!

The Southwest Tech BASIC was even slower (although not by much). We realize that SWTPC's BASIC handles nine significant digits and does BCD arithmetic, but 204 seconds compared with 81.8 seconds tells us that there's some work to be done to improve things. And when you compare it with 51.8 for Zapple and 52.4 for Altair 8K (on the 8080), well, there's a lot of work to be done.

Another thing that's interesting to look at is which BASICs are fastest at which things. For example, if you subtract the time for Benchmark 4 from the time for Benchmark 5, you can see how long it takes to do 1000 GOSUBs and RETURNs. You'll find that Altair Extended BASIC, version 4.0 (both Disk and 12K) took 1.2 seconds for this — the best of all the micros we tested.

A Final Word

We hope you found this study interesting. You can bet that the computer store owners who were looking over our shoulders found it interesting. They were without exception very friendly and helpful, but they were also concerned about how their products were stacking up against the competition. So be fair to them and the manufacturers - remember that pure speed is only one of the factors you need to consider when buying a computer. At the same time, however, we hope this article has made you realize that there are some pretty good ways of comparing the power of different computer systems. Now if you'll excuse us, we're going to load BASIC on our new Cyber 174 so we can play Star Trek.

During a phone conversation with Robert Uiterwyk, the man who developed SWTP's 8K BASIC, I happened to mention Tom and Phil's article and asked if he had any comments regarding the results of the benchmarks (in particular, of course, the fact SWTP's BASIC was so slow).

He wasn't even a little bit perturbed. His reaction was, "Of course it's slower than the others... it does more." He had three points to make regarding the speed:

- 1. It's going to be slower because it provides 50% more significant digits than other BASICs. SWTP BASIC generates nine significant digits whereas "everyone else uses six." This additional accuracy contributes to an overhead increase of about 50%.
- 2. The BCD arithmetic operations contribute approximately 20% in increased overhead but also provide increased accuracy for those operations.

3. The transcendental functions (sine, cosine, tangent, exponents, etc.) should execute twice as fast as before due to modifications found in Version 2. — John.

As a result of our submitting this article to several local computer stores, we were pleased to receive the following response from Microcomputers, Inc. We invite other stores to submit their own benchmark results. — Ed.

Along with Imsai 8K BASIC, our store also has Polymorphic 11K BASIC and Northstar BASIC (on their disk system). Thus, our benchmark times for all three BASICs. First, a few words on how we did the testing:

BASIC/machine Imsai 8K ver 1.3 Imsai 8080
Northstar ver 6 Imsai 8080
Poly 11K ver 9V27 Poly-88 System 16

*We used a watch with a sweep second hand, so we suspect our times to be accurate to only ½ second.

*The Imsai 8K BASIC is in 1702 EPROM using 1½ wait states per machine instruction access. It goes without saying that this alone slowed the programs way down.

*The Imsai 8K BASIC was run with an Imsai 8080 frame and CPU, using a Teletype as output device.

*The Poly-88 11K BASIC was run in a Polymorphic System 16 (16K RAM with no wait states, Poly video output).

*The Northstar Disk BASIC was run with an Imsai 8080 frame and CPU, using TTY again for output, and RAM needing no wait states.

BM1 11.5	BM2 39	BM3 92	BM4 110	
3.5	10.5	28	32.5	
2.5	10.2	29	34	

*Each benchmark was run three times, with the average shown as our benchmark run time.


By the authors' charted results, Poly-88 11K BASIC and Northstar Disk BASIC performed midrange in speed, and the Imsai 8K BASIC performed by far the slowest; however, keep in mind the 11/2 wait states per access on the 1702 EPROMs. I'm not sure how to bend the Imsai results to compare with the others, so I haven't. I hope you can use this additional information, and once again, my compliments on a very good effort.

> Stephen M. Pereira, Pres. Microcomputers, Inc. 539 Amherst St. Nashua NH 03060

BM5 121.5	BM6 191	BM7 320	
34.5	51	74.5	
36.5	54	79	

Table of benchmark timings (in seconds).

• 270 nsec Access Time • 470 nsec Read/Write Time • TTL Compatible Address Bus • Tri-State Data Bus Driver • Fully Socketed • Sphere Compatible • Easy Home Brew Interface • Voltages +12, +5, -5 •



LOW COST MEMORY 16K x 8 BIT DYNAMIC RAM

Model
WWW-16KA
W/W/W-16KK

Description Fully Assembled Kit Price \$650.00 \$550.00






4K RAM BOARD KIT

FAST, LOW POWER 2102-1 (450 NS)

DENSE 4.5" x 6" PACKAGE



FULLY BUFFERED

STANDARD 44 PIN GOLD PLATED CONNECTOR

\$79.95

COMPLETE KIT INCLUDES BOARD, CHIPS, CAPS, & DOCUMENTATION

450 ns	low-power 2102-1	\$ 1.60
512 x 8	bipolar prom	\$17.00
16K x 1	250 ns dynamic ram	\$54.00
	CONTROL OF THE STATE OF THE STA	

NEW: 64K S-100 dynamic ram board \$395.

ASSEMBLED & TESTED WITH 16K RAM

SEND CHECK OR MONEY ORDER


WASATCH SEMICONDUCTOR PRODUCTS

25 SOUTH 300 EAST, SUITE 215 SALT LAKE CITY, UTAH 84111

FOR ORDERS UNDER \$25,00, ADD \$2,00 SHIPPING AND HANDLING

UTAH RESIDENTS ADD 5% SALES TAX

MASTERCHARGE W13

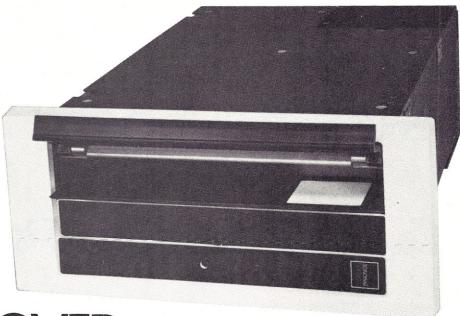

FLIP OVER OUR FLOPPY

Only \$750 from Peripheral Vision.

Peripheral Vision is a brand-new company that's dedicated to selling reasonably priced peripherals for various manufacturers' CPU's.

We think you'll flip over our first product.

It's a full-size floppy disk for the Altair-Imsai plug-in compatible S-100 BUS. And it's available for as low as \$750. Here are the features:

- 1 interface card supports 4 drives
- Stores over 300,000 bytes per floppy
- Bootstrap EPROM included—no more toggling or paper tape
- Completely S-100 plug-in compatible
- · Interface cabling included
- Drive is from Innovex (the originator of the floppy concept)—assembled and tested
- Interface card design is licensed from Dr. Kenneth Welles and the Digital Group
- Disk operating system with file management system included on floppy
- · Cabinet and power supply optional

Prices: Kit Assm.
Interface card kit and
assembled and tested drive \$750 \$850
Power supply—+24V at 2A 45 65
Cabinet—Optima, blue — 85

Now, a little more about our company.

Peripheral Vision may be brand-new, but we have some old-fashioned ideas about how to run our business.

We know there are serious incompatibilities among the

different manufacturers' peripherals and CPU's. We want to get them together. And, we want to bring significant new products to market—products consisting of everything from adaptation instructions/kits for hardware and software to major new products.

It's a tall order, but we feel we're up to the task. Peripheral Vision has already obtained a license from The Digital Group to adapt versions of some of their products to the S-100 BUS. And we're working on getting more from other companies.

Most important to our customers, Peripheral Vision is committed to helping you get along with your computer. We'll do all we can to make it easy.

Write us now for all the information on our company, our philosophy and our exciting line of products. And be prepared to flip over all of it.

93112113111 VISIU11 P.O. Box 6267 / Deriver, Colorado 80206/(303) 733-1678
Send me the works, and I just might flip over it!
Name
Address
City/State/ZipP.12
F-12

Solving Keyboard

Interface Problems

... would you believe a UART?

common need is for a device to convert the parallel ASCII output of a typical cheap keyboard into a serial Teletype-compatible output. A new UART (Universal Asynchronous Receiver-Transmitter) from Intersil makes the job very easy, and this article describes a simple circuit which easily adapts to a wide variety of uses.

The UART is a 40-pin integrated circuit made by several manufacturers under different numbers. It consists of two parts: The Receiver receives serial teleprinter data (in ASCII, Baudot, or any other code), one bit at a time, and converts it into a parallel form, eight bits at once. The Transmitter does the exact opposite, converting parallel data into serial format. Since UARTs are generally used for sending teleprinter characters,

the parallel group of bits sent at once generally represents one character. Eight bits would be used in ASCII, five bits in the older Baudot code, and UARTs also can send six or seven bits at a time.

The word asynchronous means that these characters can appear at random intervals, either one right after another, or perhaps separated by unknown times. To indicate to the receiver when the next character is arriving, each serial group of bits is preceded by a start bit and followed by one or two stop bits. The UART transmitter automatically generates these bits, and the receiver also checks for them and uses them for timing. In addition, the transmitter can generate an optional parity bit, which is used by the receiver to check whether a possible error has occurred in character transmission. Although the UART can be used both as a transmitter and as a receiver (at the same time), in this circuit we use it only as a transmitter, converting parallel data such as might come out of a keyboard or computer output port into serial data which might be needed by a teleprinter.

The first UARTs needed two operating voltages, -12 volts and +5 volts, and consumed appreciable amounts of power. Later versions eliminated the need for the -12 volt supply and could therefore run on a single +5 volt supply such as might be needed in typical digital systems. Intersil's UART operates from a single +5 volt supply and has the further advantage that it requires less than one half milliampere of supply current. Four versions of the unit are available. The

IM6402 is TTL compatible and operates on +5 volts. The IM6402A is CMOS compatible and operates on any voltage between +4 and +11 volts. The IM6403 and IM6403A are similar but have a built-in oscillator and divider circuit which makes them very easy to use. All of these ICs are second sourced by Harris under the numbers HM6402, etc.

In order to set the precise operating speed of a UART, a frequency oscillator is needed to generate a frequency exactly sixteen times the bit rate of the serial signal. For example, standard ASCII teleprinter signals send at 110 bits per second, and thus a frequency of 11 x 16 or 1760 Hz is needed. This frequency is often generated with a separate 555 timer, or more exactly with an external crystal oscillator and a fre-

quency divider IC. The IM6403 and IM6403A are especially useful because they have that oscillator and divider built-in. Only one component is needed to generate a clock: an external crystal. For standard 110 bitper-second speed a 3.58 MHz color TV crystal is needed. The crystal is simply connected between pins 17 and 40 of the UART as shown in Fig. 1. A built-in divider divides that frequency by 8192 to produce almost exactly 1760 Hz. This scheme tremendously simplifies any design and has only one disadvantage: Whereas in a standard UART the receiver and the transmitter can run at different speeds, in the IM6403 they must run at the same speed since they share the same crystal.

Fig. 1 shows the diagram of a simple circuit using the IM6403. The parallel ASCII input at Bit 1 through Bit 7 comes to the UART at the upper left; the serial output exits at the right. A "character present" strobe signal applied to either the A or the B input of a 74121 monostable provides the start pulse for the UART which tells the transmitter to start working.


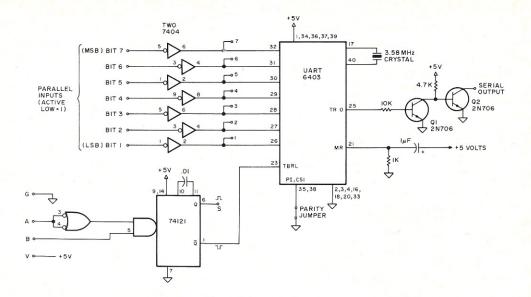


Fig. 1. Schematic diagram.

(c) POSITIVE-GOING STROBE

The only other components required are an RC network connected to pin 21 which provides a Master Reset when power is first applied. The following paragraphs describe some of the input and output characteristics; Fig. 2 shows some alternative wiring arrangements.

As shown in Fig. 1, the inputs are designed for a keyboard which provides a low voltage for a 1 and a high voltage for a 0. Two 7404 ICs are used to invert these logic voltages to a high for a 1, as required by the UART. If the 1 is a low voltage near 0 volts,

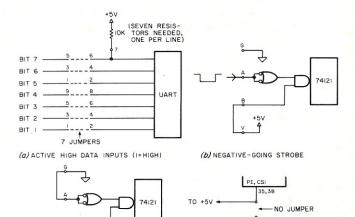

(d) NO PARITY BIT (8TH BIT ALWAYS=0)

Fig. 2. Optional connections.

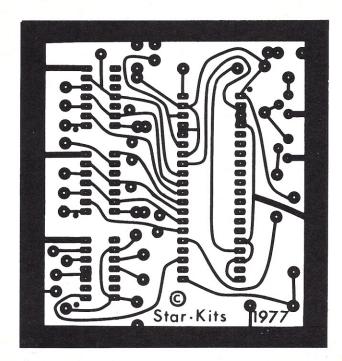


Fig. 3. Printed circuit board (full size).




Fig. 4. Parts placement.

the keyboard is said to have an active low output; if the 1 is a high voltage of some 3 volts or so, then the keyboard has an active high output. Both types of keyboards are commonly available. The inverters are needed for active low keyboards. Tie points 1 through 7, connected to the outputs of the inverters, provide an inverted signal in case you need it somewhere else in your system.

For keyboards or computer output ports which provide active high outputs no inverters are needed; as shown in Fig. 2a they are simply left out and bypassed. But in this case the tiepoints should be used to provide seven 10k pullup protection resistors (only one is shown) to protect the seven UART inputs from possible static electricity damage.

The 74121 monostable can be activated either by an active low input or by an active high input, depending on how the points G, A, B,

and V are jumpered; the correct jumpers for the two types of inputs are shown in Fig. 2b or 2c. The strobe pulse pulses the monostable, which then provides a short output pulse which starts the UART transmitter. The negative spike on pin 1 of the 74121 is needed by the UART, but the positive spike on pin 6 is also available on the S tiepoint in case you have a use for it elsewhere in your system.

Although the full ASCII code as sent over the serial line consists of eight bits, only seven of those are actual data. The eighth is generally used for parity. In many home-type systems this bit is intentionally made a 0. whereas in more professional systems it may be a 0 or 1 depending on the character. When used, it is called even parity when it is chosen such that the total number of ones in the character is even, or odd parity when the number of ones is odd. Even parity is probably more common, and the parity jumper shown in Fig. 1 is connected for even parity. If no parity is desired (always 0), then connect the jumper as shown in Fig. 2d.

The serial output on pin 25 of the UART is active high; that is a 1 or mark bit is a high voltage, and a 0 or space bit is a low voltage. If that is what your system needs, then the output from pin 25 can be used directly. If the opposite is what you need, then include Q1 and the two resistors (but not Q2); take the output from the collector of Q1.

Q2 is peculiar to my system because all serial lines in my system use an unusual convention: an open circuit is a 1 (mark), whereas a grounded circuit is a 0 (space). The collector of Q2 does just that — it is open for a mark and is grounded for a space. My Teletype machines have built-in control circuits which translate from this open-grounded configuration

to a loop current basis. The advantage of such a setup is that this allows multiple inputs and outputs to be paralleled, as can a keyboard and an amateur radio-Teletype converter. Whichever input is active at the moment, generating spaces, provides an output. In the same way, this signal can be fed in parallel to a teleprinter, to my video display, and to my acoustic coupler. Simple phono plugs or phone plugs can be used for switching inputs and outputs around in any configuration.

The circuit is easy to build; since no very high pulse rates are involved, almost any construction method can be used. If you wish, you can use the printed circuit board layout of Fig. 3, with the parts locations as shown in Fig. 4. Use the indicated layout to make your own board; alternatively, drilled and plated boards will be available from the author for \$7 each.

TELETYPE° MODEL 33 ASR

COMPUTER I/O COMPLETE WITH:


• Tape Punch

Ready to Go

\$84000 INCLUDING PACKING F.O.B. - N.J. FACTORY

LOOK! Hard to Get Parts & Supplies for 33 ASR/KSR's

PAPER - WHITE or CANARY



\$22.00 / 12 - 5" diam, rolls. BLACK NYLON RIBBONS SINGLE SPOOL \$11/Doz. DOUBLE SPOOL \$15/Doz. ANSWER BACK DRUM (180827) \$7.00 CODED (SPECIFY CODE) \$10.00 DOME LID (181137) \$5.75* BLANK PLATE (181910) \$7.00* KNOB (181824) \$1 00 KEYTOPS (YOUR CHOICE) 60c ea. ONE PIECE COVER (187300) \$22.00* UCC-6 LINE-LOCAL \$150.00 UCC-3 FOR TWX \$150.00 FRONT PLATE (181812) \$2.50 DATA SETS 101C FOR TWX \$450.00 NEW 105A FOR TWX \$300.00

If you don't see what you need, CALL or WRITE! O If its for TELETYPE® We Have It.



TELETYPEWRITER COMMUNICATIONS SPECIALISTS

550 Springfield Avenue • Berkeley Heights, N. J. 07922 (201) 464-5310 • TWX: 710-986-3016 • TELEX: 13-6479 Deaf Line TTY: 201-464-5314 SUBSIDIARY OF VAN'T SLOT ENTERPRISES, INC.



PLEASE NOTE

Due to increased costs of processing orders minimum orders: \$10.00 cash or check, \$25.00 charge.

All orders shipped UPS. Please include sufficient postage.

KITS BY (Cybercom

4Kx8 Static Memories

MB-1 MK-8 board, 1 usec 2102 or eq. PC Board \$22 (Not for S-100 Buss)

MB-4 Improved MB-2 designed for 8K "piggy-back" without cutting traces. PC Board\$30 Kit 4K .5 usec....\$129.95 Kit 8K .5 usec....\$199

MB-3 1702A's Eroms, Altair 8800 & Imsai 8080 compatible switched address & wait cycles. 2K may be expanded to 4K. Kit less Proms....\$65 2K Kit....\$105 4K Kit. \$145

MB-6 PC Board\$35

MB-6A 8Kx8 Switched address and wait assignments. Memory protection is switchable for 256, 512, 1K, 2K, 4K and 8K. 91L02A .5 usec rams. Altair 8800 & Imsai compatible. With battery power option.

Kit . . . \$250 Assembled & tested \$290 I/O Boards

VO-2 I/O for 8800, 2 ports, committed pads for 3 more, other pads for EROMS UART, etc.

Kit....\$55 PC Board only\$25

64 x 16 VIDEO BOARD Altair plug compatible display 32 x 16 or 64 x 16 switch selectable. Composite and parallel video ports, upper and lower case with

software.\$179.95

SP-1 Synthesizer Board Computer controlled wave forms 9 octaves 1vrms ½% distortion includes high level music langauge. Kit\$250 Altair Compatible mother board. Room for 15 connectors 11" x 111/2" (w/o connectors)\$45 With 15 connectors\$105 Altair Extender Board (w/o connectors) \$9.00

100 Pin spec WW or Soldertail both fit Imsai or SSM Mother Board \$5.00 each 10/\$44.

Wildlier Board 45.00 cach 10/4+1.	
1702A EROM	\$ 8.00
programming send hex list	5.00
AY5-1013 UART	6.95
2513 Prime spec. upper or lower case	11.00
8080A prime CPU	25.00
8212 prime latch buffer	4.00
8224 prime clock gen	5.00
8228 prime sys controller	8.90
CONTRACTOR - CONTR	

82S06	2.00	82S126	3.50	74C200	5.50	
82S07	2.00	82S129	3.50	8573	4.50	
82S11	2.00	82S130	3.95	8574	5.50	
82S12	2.00	82S131	3.95	8575	4.50	
82S17	2.00	74S206	2.10	8576	4.50	
82523	2.50	74S412	4.00	8577	3.50	
825123	3.00			8578	4.00	

MM5309	8.00	2501B	\$1.25	1101	.40
MM5312	4.00	2503V	2.00	1103	1.25
MM5313	4.00	2504V	2.00	2101	4.50
MM5320	4.95	2505KN	2.00	2112	4.50
MM5554	1.90	2507V	1.25	2602	1.60
MM5556	2.50	2509A	2.00	4002-1	7.50
MM5055	1.90	2510A	2.00	4002-2	7.50
DM8836	.60	2511A	2.80	MM5262	1.00
DM8837	1.50	2517V	1.25	7489	2.00
80C95	1.10	2518B	1.50	74200	4.95
80C97	1.00	2519B	2.80	74S89	3.50
801.97	1.50	2521V	1.50	74C89	3.50

2.00

2.80

2.80

2.80

2.80

2.80

2.55

2.40

74L89

8T80

8T97

8216

8214

8251

8255

1488

1489

INTEL

81L22

81L23

811.51

85L52

85L63

86L70

861 99

86L12

1.50

2.50

2.50

1.25

1.50

3.50

.80

2522V

2525V

2527V

2528V

2529V

2532B

2533V

91L02APC

32 ea.

64 ea. 2.25 2.50

419 Portofino Drive San Carlos, California 94070 Please send for xistor, IC and kit list

74LS192 2.85 For large orders please send money order or cashier's

check to avoid delays in waiting fr checks to clear. Check or money order only. California residents add 6% tax. All orders postpaid in U.S. All devices tested prior to sale. Money back 30 day guarantee. Sorry we cannot accept returned ICs that have been soldered to. \$10 minimum order. Prices subject to change without notice.

Kits by WALCON (AVAILABLE MID-MAY)

MM-1 8Kx8 Ram Board First fully buffered 8K ram board. Addresses and data are fully buffered. Low power rams used. Protect is reset with a single switch. Documentation is available for \$5 which is refunded at

MM-1 Kit															.\$2	45
Assemble	d	 													2	95
PC Board	only															30

- * 2102AL-4 FULL SPEED MEMORY (500ns)
- Nearly 1/3 less power consumption of even a 21L02A PRIME FROM NEC 32 FOR \$1.80 EACH \$2.00 FACH

64 - \$1.70

128 FOR \$1.60 EACH

7400	.16	7470	.45	74161	1.00
7401	.16	7472	.40	74162	1.50
7402	.21	7473	.35	74163	1.00
7403	.16	7474	.35	74164	1.10
7404	.18	7475	.50	74165	1.10
7405	.24	7476	.30	74166	1.25
7406	.20	7480	.50	74170	2.10
7407	.29	7483	.70	74173	1.50
7408	25	7485	90	74174	1 95

50 00 10 25 .95 7408 7409 .25 74175 .95 7489 2.00 74176 7411 .30 7490 74177 90 .45 .70 .35 .75 7413 7491 .90 7414 7492 74180 90 2.50 74181 7416 .35 .20 .37 .80 .75 7494 74182 .95 7495 1.95 7420 74184 7496 7423 74185 2.20 .30 7425 74100 1.00 74190 1.15 74107 74191 1.25 74109 .90 74192 .90 74121 .40 74193 90

7426 .25 7430 .50 7432 74122 74194 1.25 7437 .27 74123 74195 75 74125 .60 1.25 7438 74196 .60 1.00 7440 .15 74126 74197 74132 7441 .85 74198 1.75 1.75 7442 74199 .60

7443 .75 .75 74145 1.15 74200 4.95 74147 2.35 1.75 7444 74251 .75 7445 74148 72284 .80 7446 74150 1.00 74285 4.95 .80 74151 7447 74365 .90 7448 74153 90 74367 .75 74154 1.00 .25 .25 7450 74368 90 7451 74155 1.00 MH0025 2.50 7453 .25 74156 1.00 MH0026 2.95 74157 1.00 7454 95H90

74160

7460

74LS00

741 S01

74LS02

74LS03 74LS04

74LS05

74LS10

)	.40	74L00	.25	74L78	.90
	.50	74L01	.25	74L85	1.40
2	.40	74L02	.25	74L86	.75
3	.40	74L03	.25	74L89	3.50
1	.45	74L04	.30	74L90	1.50
	45	74L05	.40	74L91	1.50

.30

74L93

1.70

74L08 74L09 74L95 74L98 00 74LS11 .50 .40 1.70 .55 .40 .45 40 2.80 i 00 74LS12 74L10 74L123 1.50 74LS20 74LS22 74L20 74L26 35 74L154 2.00 .40 74L164 2.50 45 50 74I S27 2.50 40 74L30 .40 74L165 3.50 74LS30 74L192 2.50 74LS42 1.50 74L32 45 1.25 1.20

74L06

40

74L42 74L193 1.50 2.00 74LS55 40 74L51 74L54 .35 2.25 .65 MC4044 74LS73 N8263 4 95 74LS74 .65 74LS76 74L55 .35 N8826 2.50 8.30 .65 2.50 74LS151 1.55 75L71 74L73 30 DM8131 .55 8T16 2.00 14.50 74LS174 2.20 74L74 8T20 2.00 74LS175 1.95 1.50 74L75 1.20 8T10 2.00 1.50




The Proko Paper Tape Reader

A fully TTL buffered optical tape reader for reading 8-level paper tape. It's compatible with nearly all parallel input ports and has both positive and negative strobe outputs. The power (+5V @ 20ma) is derived from your I/O board...just supply a light source (study lamp), grab the tape and pull!

PTR-II Kit \$54.00

Assembled \$68.00



Now, add mass storage to your micro with the North Star floppy disk system. Comes with cables, S-100 controller with bootstrap rom, and powerful extended basic. (Basic supports sequential and random access disk files.)

SPECIAL DEAL: IMSAI WITH DISK \$1325



The S.D. Sales Co. Z-80 CPU Kit For S-100 Buss \$14900

SPECIAL DEAL No. 2 IMSAI 8080 with 22-SLOT MB UPGRADED WITH Z-80 CPU \$75000



POWER TRANSFORMER FOR ALTAIR® TYPE BUSS

Designed to deliver +18VDC @ 2A and 5VDC @ 22A with proper bridges and fil-

tering. 29⁵⁰ each

NEW FROM IMSAI

32K RAM CARDS for S-100 Buss

Full Speed — Low, Low Power \$72500

D-CONNECTORS 25-Pin

for Prokotyping \$13⁵⁰ each 4 for \$4400

Male \$300 Female \$400 Pair \$650

439 marsh street san luis obispo, california 93401 805/544/5441

Delivery: Stock to 45 days from receipt of order. We pay all U.P.S. shipping on U.S. orders. Check or money order accepted. No.P.O.s except by above terms. California residents add 6% tax. Prices subject to change without notice.

A Clean Cassette

... getting the most from inexpensive recorders

ou say you have been having problems with the reliability of your Tarbell cassette interface? Stop looking at the interface and take a close look at your tape recorder.

Certainly many of us have

had problems getting our Tarbell interface to work properly. Sometimes an IC is bad or perhaps a bad solder joint causes problems, but once these conditions have been cleared and record and playback problems will still exist, most of us get out the scope and start looking at the interface input and output waveforms. Well don't, unless you want to be more confused than ever.

After looking at several Tarbell interface boards, I have decided to take another approach which turns out to be much more rewarding.

Find a friend whose system (interface board and tape recorder) works reliably. Borrow the tape recorder and check it with your interface board. If there is significant improvement, then you are on the right track.

Before purchasing a tape recorder, I watched several individuals agonize over their inability to record and play back successfully on expensive (around \$100) tape recorders; yet others with less expensive recorders were very successful, recording and playing back blocks as long as 24K bytes on inexpensive models. Not to say that all of the more expensive cassette

recorders don't work, because some do.

So, initially I borrowed a friend's tape recorder, a J C Penney Model 6536 which sells for \$39.95. This worked wonders. I was able to record and play back without one error. The JC Penney Model 6536, however, had several shortcomings for data recording. First, and most detrimental, was that the built-in microphone was always in the circuit, even when the cassette interface was plugged into the AUX jack, which meant any noises in the room were recorded along with the data. Naturally this caused a hiccup on playback, so the first mod was to fix this.

Since the most reliable playback is made with the TONE control rotated to treble (10 on the dial), and the MIC OFF switch is on the TONE control, but in the opposite rotation, the obvious answer is to reverse the pot, making the MIC OFF switch turn off the microphone at full treble. Fig. 1 shows the one foil cut and one jumper required. This has the added advantage of not completely disabling the internal microphone, so voice annotation may be made if desired. This modification simply makes full treble at position 0 and full bass at position 10, with the microphone off at 0.

The next modification was a boon to locating data on the tape and indicating when to start the software loader reading the data. This mod makes it possible to hear (via the cassette's built-in speaker) the tone leader and data while the interface is plugged into the EXT SP jack (plugging into the EXT SP jack normally disconnects the internal speaker). Fig. 1 shows where to install a 470 Ohm, 1/4 Watt resistor to allow the speaker to be in the output circuit. The value of the resistor may be varied to obtain different speaker output levels, but 470 Ohms is the best for me. Don't overload the output section; 100

Remove bottom cover.

Position unit with TONE and VOLUME controls toward you and PC foil up

Modifications at Locations Shown Add 470 Ohm, 1/4 Watt resistor One foil cut One jumper

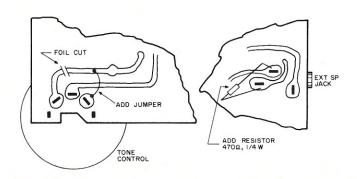


Fig. 1. J C Penney Model 6536 Cassette Recorder modification.



J C Penney Cassette Recorder with Tarbell Cassette Interface.

Ohms is recommended as a minimum value.

With these mods in and everything working better than ever, I returned the borrowed tape recorder.

The JC Penney Model 6536 had several additional shortcomings that made me want to investigate other machines. The biggest was that the FAST FWD button did not lock down and didn't provide a very fast forward. So, off to the marketplace I went. Now, since the borrowed Penney's recorder worked so well, I decided to try JC Penney again, this time for the next more expensive model. With the "satisfaction guarantee," which most big stores give, in mind, I purchased the JC Penney Model 6551 (\$59.95).

Here is what I found. The J C Penney Model 6551 automatically disconnects the microphone when an external source is plugged into the AUX IN jack; so, no microphone mod was necessary.

The fast forward locked down and provided a very fast forward. There were also the added features of REVIEW and CUE which allows fast reverse and forward while in the playback mode. This model also has auto stop on playback or record. I did, however, find a disadvantage that was soon overcome. The range of the volume control for data acquisition on playback was extremely limited (6.5 to 7.5 on the dial). It turns out that the 10 K VOLUME control is extremely nonlinear; so, I replaced the volume control with a miniature linear trimpot which now gives an acceptably large input range. While I was inside, I also removed the TONE control and replaced it with a 15 K, 1/4 Watt resistor (full treble). This precluded the chance of it accidentally moving from full treble. I also added a 470 Ohms, 1/4 Watt resistor to put the built-in speaker (quite muted) back in the circuit,

Remove bottom cover.

Position unit with TONE and VOLUME control toward you and PC foil up.

Modifications at Locations Shown

Remove VOLUME and TONE controls (remove two brass nuts and unsolder).

Add 10k Ohm miniature linear trimpot below board for access, through front when unit is closed. Orient as shown for volume increase with clockwise rotation.

ADD 15k Ohm \pm 10%, 1/4 Watt resistor ADD 470 Ohm \pm 10%, 1/4 Watt resistor




Fig. 2. J C Penney Model 6551 Cassette Recorder modification.


while the cassette interface was plugged into the MONITOR jack. Fig. 2 shows the modification. Now I have an extremely reliable peripheral for my system.

Both models may be run from ac power or batteries. I have been using ac power without problems. Both models have tape counters that count very closely to each other.

Either J C Penney model will give excellent results and perhaps other brand recorders may benefit from these modifications.

Try a Design Console

... for practical hardware prototyping

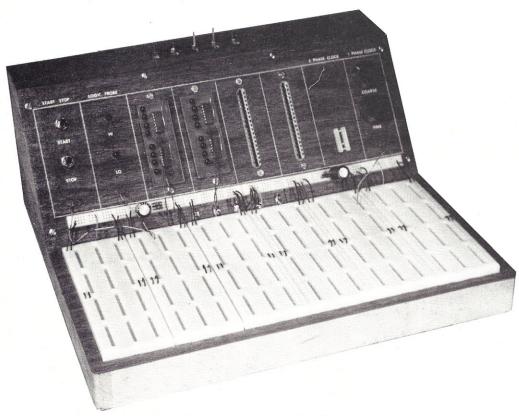

Design Console - deluxe version.

For those of you planning to participate in the Kilobaud Klassroom series you'll be needing the construction plans provided here for the Student Console. As for the rest of you . . . if you don't have a design console on your workbench for breadboarding circuits, then now is the time to build one (it's really the only way to go!). — John.

eed to test an IC? This will do it. You can test a 7400, or design an "automatic" circuit that will test 10,000 of them. Need to evaluate a circuit just published in your favorite magazine? This will do it. You can find out if the published circuit works as described or will suit your requirements within a few minutes after

you get the parts required for the circuit. Need to modify the circuit a little? This will do it. Need to evaluate a microprocessor chip? This will do it. I've had a complete computer set up and running on the thing.

This construction article presents suggestions for an experimental tool. Solderless breadboards allow testing and

evaluation and modification of circuits quickly and at very reasonable cost.

History

The original version of this device was constructed more than two years ago with just one solderless breadboard, with a clock circuit and a logic probe built in for support circuits. A later revision used 4 solderless breadboards, a clock circuit, logic probe, 2 LED registers, a three phase clock circuit, and a 7 segment readout. It wasn't flexible enough still. The latest version of this design console has 6 solderless breadboards, two power distribution strips, a single and three phase clock circuit, a start-stop control, and a logic probe built-in. But in addition, it has 4 edge connectors built into the sloping control panel. Now it has the flexibility that I need for whatever I want to do.

Construction


My framework is sugar pine, but any soft, easily workable wood will do. The framework is glued and nailed. A hot glue gun is rapidly becoming indispensible around the shack.

The wooden framework is then skinned with plastic laminate. For this project I busted one of my cardinal rules and broke down and bought some walnut grained plastic laminate to dress it up a bit. The two horizontal surfaces were glued in place, while the front panel was made removable. The Superstrips were bolted in place. Superstrips are available from AP Products, Inc., Box 110, Painesville, Ohio, 44077 or call them toll free for the name of your nearest AP Products distributor. (800-321-9668). The front panel was lined into rectangles with a white colored pencil (which wasn't entirely satisfactory) labeled with decal lettering (dry transfer lettering is also satisfactory) and then sealed with a coat of clear lacquer to protect the lettering and the lines. The slots were cut in the front panel with a router and a special jig made expressly for this purpose.

Bolts, nuts, and solder lugs make inexpensive, rugged, feed-through terminals to bring power in and out of the console. The previous two versions utilized nuts, bolts and solder lugs for both power and signal connections. In this version I have added a new twist which has proven faster for the signal connections. Subminiature tube sockets, transistor sockets, and IC sockets have been utilized to make plug-in provision for the signal lines. Again, the hot glue gun made quick work of mounting these components.

Power at the moment is external to the console, entering the console at the top on five 4-40 bolts. There is sufficient room inside the console for a power supply to be built-in.

Superstrips are useable right out of the box. But anchoring them down and adding a few support circuits increases their versatility 1000 times. There is some additional space remaining along the top of the console. This could be used to mount controls, or switches, or both, but for now I plan on using the plug-in module approach with these components

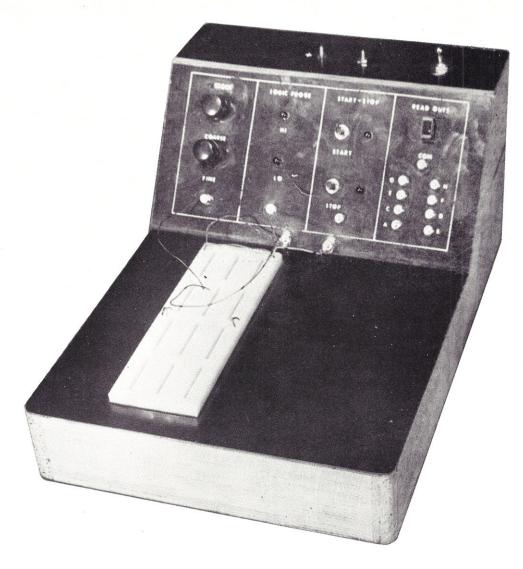

Kilobaud Klassroom student console.

plugging into the edge connectors mounted in the front panel.

The console support circuits that I incorporated are shown in Fig. 1. The three phase clock circuit is not included since the demand for this circuit probably would not be very great. Anyone desiring a copy of this circuit can have one for a self-addressed envelope.

A simpler version of the console is also presented. This simplified version is the one that we will use in Kilobaud Klassroom (and is called the Student Console). The dimensions for both consoles are given in Fig. 2 and 3. The photographs show sufficient detail to allow you to whip up something similar. Nothing is critical. All that is

really needed is a little Tender Loving Care (TLC).

Construction Details

The bulk of the following discussion deals with construction steps for the assembly of the Student Console. Almost every point considered is applicable to the Design Console as well. If you are already an experienced builder, then this section can be very rapidly perused and construction can begin. There is actually room on the working surface of the student console for four Superstrips. We will start with one, and more can be added as your own personal finances permit.

Start by cutting out the side, front, and back pieces of the console. File or sand down the saw cuts until the

edges are reasonably smooth. The band saw in the high school wood shop (or junior college wood shop) will make very short work of the side panels. However, the home handsaw will also get the job done and very quickly if you have to drive any distance to get to the school. (Most schools run a night school class for adults in the community . . . check it out.)

Place the front and rear panels so they are recessed about a millimeter (1/32 inch) or so. This is so that we can file or sand the framework smooth. Assemble the sides and end panels using glue and finishing nails. White glue or a hot glue gun works the best. If you don't have finishing nails, use whatever you do have on hand. The 4d

finish nails are about right. Set the nail heads; it will ease the job of sanding. After the framework is assembled, we need to add the support strips for the support surfaces for the plastic laminate. I used 1cm x 1cm (½ x ½ inch) strips, but anything will do. Fit these very carefully, glue the ends, and drive one nail in each side to hold the strip while the glue dries. The upper support strip should be positioned so that it is flush on the top surface but protrudes past the slanting panel surface. After the glue has set, the protruding surface is planed off flush with the slanted panel sides to provide a flush surface to hold the plastic laminate. File or sand the console edges and surfaces to provide smooth surfaces to attach the plastic laminate. The wood can now be painted if you really want to have a show-off console, but the wood surfaces need not be treated any further for functionality. Next attach the two horizontal plastic laminate surfaces. The rear portion of the lower horizontal surface can be beveled slightly to fit more closely to the sloping section. When working with plastic laminates, leave a slight overlap, or overhang, on each edge. Here there will be three edges overhanging when this is done correctly. About 2mm (1/16 inch) is satisfactory. The purpose of the overhang is twofold: 1) it insures that the laminate will completely cover the area and, 2) it allows a slight chipping of the edges of the laminate during sawing so that the chipped edges will not show after (Some laminate finishing. workers leave as much as a 1/4 inch overhang.) Affix the two horizontal surfaces to the frame with glue. The standard procedure is to use contact cement. However, this can be very tricky if you do not have previous experience with it; so try white glue. It will allow you to move things around a bit and get things lined up where you want them. Weight


the two surfaces with something flat and set it out of the way until the glue cures.

After the glue has cured, file the edges of the laminate down flush with the wood. Angle the file slightly as you approach the final stages so as not to undercut the wood. Finish the last stages with sandpaper for a superior job. A very rough job here will be perfectly functional, but a little TLC (tender loving care) will give you something that you can show off with pride. No one says that HB (home brew) equipment has to look like it was HB.


The front panel is done next. Here is the way I have my own high school students do it. Bevel the lower edge of the front panel so that you get a good snug fit with the lower surface that is already laminated. Now position the panel so that you have a slight overhang on three sides again. Drill a single hole through the panel about 21/2 cm (1 inch) above the bottom of the panel and try to hit the wood dead center. Remove the panel and enlarge this hole to clear the screw that you will use to fasten the front panel to the wooden frame. A #6 woodscrew about 1 inch long will be satisfactory. Now fasten the panel in position with the screw. Move to the opposite side and repeat the process for the lower hole on that side. Refasten the panel in position. Now you can proceed with both upper holes locating them about 21/2 cm below the top. The reason for all this is to assure that the holes, panel, and frame will all turn out in the right places. After the panel is fastened in position, it may be trimmed to the exact size of the support structure in a manner similar to that discussed earlier for the two horizontal surfaces. reason for making the panel removable will become clear shortly.

Dolling It Up


Nothing sets HB equip-



(a) Start-stop control.




(b) Logic probe.




(c) Single phase clock circuit.

(d) 30 clock circuit. See text.




(e) LED registers.

Group 2. Plug in modules.




(f) Plug in switch module.



(g) Plug in pot module.

Fig. 1. Console support circuits.

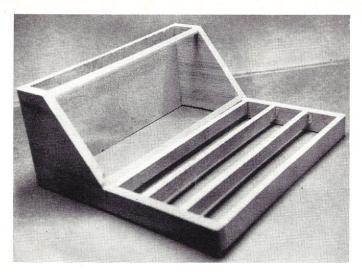

Wooden framework for deluxe console.

Student console framework.

ment apart from commercial equipment as does the lettering. There are perhaps 20 different methods that can be used, but I am only going to tell you about a couple of practical ones. Dry transfer letters may be purchased at almost any stationery store. Select a contrasting color to the panel color, white if your panel is dark, black if your panel is light in color. Decals, which may be obtained at most electronic stores are another convenient method. Even if the precise label you need is missing from the set you buy, you can still cut apart words and syllables to form the label that you need. Both of these letters can be sealed in clear plastic by buying a can of clear lacquer spray at a paint store or supermarket and applying it to the panel while it is in a flat position.

If an india ink lettering set is available for your use, this can also be used to make a professional looking panel. India ink will not flow onto most plastic laminates. Try spraying a coat of clear lacquer on the surface and

allowing it to dry thoroughly. Then letter directly on the lacquer layer. After the ink is dry, spray again so that the ink is sealed between two layers of plastic. I have even used this technique to label directly onto aluminum surfaces. The aluminum is first buffed on a wire buffing wheel, keeping the grain produced aligned. This is then sprayed with lacquer, inked with a Leroy lettering set, then sprayed again. The black letters on the silvery background are quite attractive.

Less professional looking labels can be produced with a Dymo labelmaker. Another trick is to use a typewriter and white paper. Type the labels with the typewriter. Cut them out with scissors into as perfect a rectangle as you can and affix it to the panel in the appropriate position with Magic Mending Tape.

The student panel shown in the photograph was labeled using a silk-screen process. This was produced by our graphic arts department since many of these panels had to be produced for our students.

This is not a practical method for the HB constructor, but it is worthwhile if many identical panels are to be made.

There are many other methods that can be used, but these are some of the practical ones for the home brewer.


Wiring It Up

Once the panel is completed, it can be attached to the front panel and we can proceed with the wiring of the console (see Fig. 4). Locate a toggle switch about 2½ cm in from the right-hand edge if you are right handed (left edge if left handed) and centered in the top horizontal surface. This may be any toggle switch; it will be used

to remove power from the entire console. Position two 4-40 nuts and bolts, with a solder lug on each, about 3 cm apart and located centrally in the top surface. These will be used to bring power into the console. These may be about 1 cm long.

Position two more 4-40 x 1 inch bolts, this time with a solder lug inside and outside the console directly under the two upper 4-40 bolts, at the bottom of the front panel. Keep the spacing the same. These will bring power through the front panel to be available to the Superstrip. The bolts on top should point outward, those below inward.

Run the common - wire directly from the top -






Fig. 3. Kilobaud Klassroom student console.




Fig. 2. Design console dimensions.

terminal to the lower - terminal but route the wire over near the switch, down the side, and back across to the bolt. This is to keep the wire clear of the area back of the front panel. Run a wire from the + terminal on top, over to the switch, through the switch, then down to the center, and then across to the + bolt terminal at the bottom of the panel. The switch should interrupt the circuit path so that power to the console may be turned off with this switch.

Now, an option. The wire coming from the off-on switch may be connected to the + bolt. Or we can install another solder lug in the wooden frame near the + terminal and install a diode in series with the line. This diode will drop about 0.75 volts, but it will also give you a measure of protection for your ICs mounted on the Superstrip. It serves as a reverse polarity protector and prevents power from reaching the ICs if you inadvertently connect up the power source backwards. It is a very worthwhile addition to your console, but it is optional. Both circuits are shown in Fig. 4. If you install this protective diode, the diode connected in series with our 6 volt battery may then be eliminated. In fact, all you have to do is install it inside the console instead of on the battery pack.

At the bottom of the console, solder two red wires to





Fig. 4. Student console wiring.

the + terminal, and two black wires to the - terminal and then cut them to appropriate lengths and plug them into the buses on the Superstrip, + on the outside rails, - on the inside rails.

Mounting the Seven Segment Readout

To mount the FND 70 in the front panel of the console, proceed as follows. Make a template of the pin spacing on the FND 70. Here is one way to do it. Place a sheet of paper over the Superstrip. Using a pencil, shade the area over ten triple pairs of pin holes on the Superstrip. Keep shading with the pencil until you can locate the 10 holes that match up with the 10 pins on the FND 70. Find a clear piece of plastic. Half a credit card holder from your wallet will do nicely. Place an issue of Byte, Ham Radio, or QST on the work table, then place the sheet of plastic on the magazine. Then place the shaded paper template over the plastic. With the scribe (probe) that I had you make in session one (or a straight pin or needle for you stubborn characters) poke the pattern through the plastic and into the surface of the magazine below. Discard the paper template and enlarge the holes in the plastic until you can get a pencil point through them. (Don't overdo it or you get to start all over.) Position the plastic template at the top right corner of the console front panel (see photograph of the front panel) and mark the locations of the 10 holes. The probe can also be used to do this instead of a pencil. The reason for the clear plastic is to enable us to see what we are doing, and if we miss one hole, we can place the plastic back in position to pick it up.

Now you are going to have to drill ten #60 holes in the front panel and exactly where the ten holes are marked. The probe can be used to centerpunch these locations, but under no circumstances

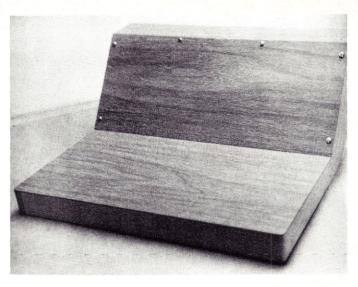

Console with plastic lamination "skin."

should a hammer and conventional center punch be used. The front panel will fracture.

I have not included any PC boards here with this article. It is my intention to teach you how to make simple circuit boards in the Kilobaud Klassroom sessions. We will need a PC board drill at that time, so you might as well buy one now. A #60 drill is fine for general purpose PC board work. Store the thing in a small plastic pill bottle so that it won't get lost.

Haywiring In the Readout

The FND 70 readout may be haywired into the console front panel at this time. Refer to KB Klassroom, Session 2, in this issue for this procedure.

The FND 70 readout is pushed through the ten holes very carefully (they do not appreciate having their pins bent back and forth at all!) and then haywired to the eight 4-40 x ½ inch bolts on the front panel. It is advisable to connect the current limiting resistor between pin 1 and the panel bolt marked common. This could be omitted and the current limiting resistor included each time the readout is connected for use in a circuit on the breadboard, but the first time you forget to include it in setting up a circuit, you will blow the readout and have to replace it. I'm reasonably sure

that by the time you struggle through haywiring 8 pin connections up on the back of the front panel, that you will install the current limiting resistor here on the back of the front panel between pin 1 and the common bolt.

Hint: By unsoldering a couple of wires carrying power, etc., the entire front panel can be removed and laid flat on the workbench to greatly simplify the task of wiring in the readout.

Display Functions of the Readout

After completing the wiring of the FND 70 readout, you can connect wires from the bolts to + and form the following numbers and letters: 0,1,2,3,4,5,6,7,8,9 and A, b, c, d, E, F, G, H, J, L, o, P & U. And we now have a bank of 8 LEDs at our disposal that can be used in place of discrete LEDs.

Conclusion

I get a great deal out of my Design Console. I use it constantly. The power supply used to power my console will be written up in the Kilobaud Klassroom series. Look for it in KB Issue 8. For those of you that can't wait that long, send me a self-addressed stamped envelope and I'll get it to you. As additional support circuits are developed I'll send them on to John.



The Noiseguard™ system's interlaced ground system shields all bus lines from cross-talk...and lowpower active termination absorbs noise and signal reflections.

The printed circuit board is double-sided and (of course) has a solder mask. And there's 3 uncommitted positions for peripheral power.

The incomparable WünderBuss™, by Morrow's Micro-Stuff, is now available for \$76 alone. With 10 edge connectors, \$120. With 20 edge connectors \$154. Add \$4 handling.

505 Arlington Berkeley, Ca. 94707

See it at your local computer shop Place credit card orders toll-free to 800-648-5311



Your single source for the most advanced S-100 components available:

★ Guard your Altair, IMSAI or custom system against program crashes with CONSTANT VOLT-AGE POWER SUPPLIES, special 12 and 20-amp models from Parasitic Engineering. * INTE-GRATED CPU/FRONT PANEL gives you access to all 8080 registers, I/Os and memory from octal keyboard and digital LEDs ...by Morrow Micro-Stuff. * WünderBuss with Noiseguard™ is the only 20-slot S-100 bus-board with twoway squelching. ★ TOTAL I/O BOARD for \$120! 3 cassette channels with control, RS232/TTY port, parallel port, memory. * Write for specs.

505 Arlington Berkeley, Ca.

photo - courtesy Peter Hollenbeck Byte Shop Berkeley

3 Brand New Computer Kits 8Kx8 ECONORAM IIT \$163.84

Uniquely configured as 2 separate 4K X 8 blocks (with fully independent protect and address decoding to increase flexibility), our ECONORAM II[®] features full buffering, guaranteed 450 ns or faster speed (use 1 wait state with Z-80; necessary logic included on board), plated-through, double-sided epoxy glass board with gold edge fingers, low profile sockets, on board regulation, and 3 state outputs that can drive the Altair/IMSAI S-100 or any bidirectional buss. We use proven, reliable technology, like static 2102L-1 low power RAMs and low power Schottky ICs to keep current consumption to an absolute minimum. And there's more . . . but to see for yourself, send \$1 to cover costs and we'll send you our ECONORAM II® Logic

OTHERBOARD \$80


Use with the IMSAI microcomputer as an add-on with room for 10 peripherals, or for starting an 11 slot stand-alone system. Comes with 10 edgeconnectors---lots of places would charge you the cost of our Motherboard for these alone. Active, regulated terminations, included on board, minimize the crosstalk, noise, overshoot, and we use an epoxy glass board, with bypass caps and heavy power traces included. Get yourself one of these, an S-100 buss CPU card and front panel, some ECONORAM II® boards and a power supply, and you are well on your way to a powerful system at a really good price.

Finally, a quality, cost-effective supply for small systems. Gives you a full 4 Amps at 5 Volts, with crowbar overvoltage protection, along with half an Amp of +12 and half an Amp of -12... and an additional 10 mA supply, adjustable over 5 to 10V for biasing required by some CPUs. Although intended for use with computer systems, it's also a dandy little bench supply for digital work.

GODBOUT ELECTRONICS

TERMS: Please allow up to 5% for shipping; excess refunded. Californians add sales tax. Street address must be included for COD orders. Place BankAmericard® and Mastercharge® orders (\$15 minimum) by calling our 24 hour order desk at (415) 562-0636.

FREE FLYER: Just give us the word and we'll send out a copy of our flyer, which describes our complete line of products in greater detail.

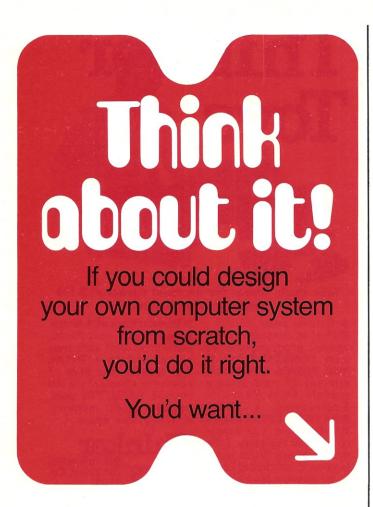



from page 20

in the software example) and a fair, if rather brief, survey of various MPU's strengths and weaknesses is offered.

The book assumes that the reader is already familiar with simple logic circuits (no explanation is offered for standard gate diagrams) but is completely unfamiliar with computer operation (a lengthy appendix is offered on computer arithmetic). The book also seems to assume that the reader is more interested in hardware than software, an assumption my experience in working with novices has not borne out. The book begins with the best introductory explanation of microprocessor concepts I have yet seen. After the first fifty pages, the beginner has been exposed to all the buzzwords we seem to love, He should now understand the various components of a microcomputer system, There is not much point in

their uses, advantages, and shortcomings. Oddly, although the book is well illustrated, the authors never show an actual microcomputer (except for a KIM-1 which is used to illustrate the concept of a hex keypad). The authors never discuss how the novice might judge the merits of one system over another.

After this introductory material the authors plunge into a 84 page explanation of hardware, complete with schematics for power supplies, clock generators, a PROM programmer and a variety of keyboard and display circuits. For reasons known only to the authors, a PROM programmer, not a microcomputer, is featured on the cover! I think this emphasis on hardware is a mistake, one made by several other introductory books in this field. The reason microcomputers are so difficult to teach to a beginner is that hardware and software are so intimately bound together.

telling the novice that a CPU contains an index register without explaining how that enhances the flexibility of the software. The concept of a hardware interrupt indirectly raises the question of how these interrupts are serviced in software.

Unfortunately, what is really needed is some of Ted Nelson's HyperText, where the reader can request further information on a point which puzzles or interests him. (Osbourne's Introduction to Microcomputers tries to do this with a bold face/light face type mixture.)

It has been my experience that most beginners want to know how to program a system before they are interested in circuit details, and so I think that the authors should have put their 45 page chapter on software first if they insist on splitting the two. A simple block-move program is used as the vehicle for explaining instruction types and operation. This is a


good example to use (Osbourne uses it for his benchmark comparisons for processor instruction sets) since any program doing arithmetic or I/O usually ends up being processor dependent.


In summary, this is probably the best 180 pages of information available to the hardware oriented beginner. After reading this book, the novice will be able to read the articles in Kilobaud (or the manuals that come with his first system!) with some degree of confidence and understanding.

> Rick Simpson Haddon Heights NJ

An Author's Complaint

The following is a reply by Charles Sippl regarding the unfavorable review his book, Microcomputer Dictionary and Guide, received in Issue #4 of Kilobaud. He is also responding to and has some rather strong feelings about the comments I made in my editorial (in #4)

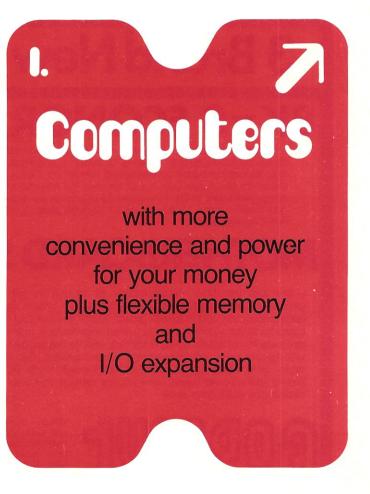

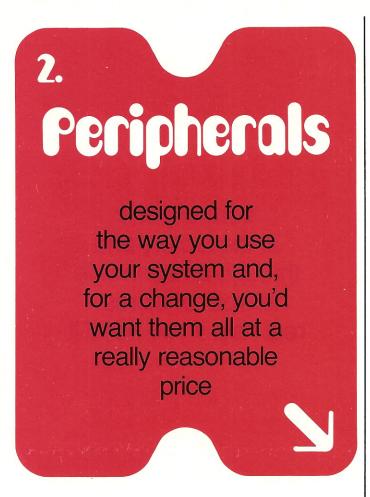

indicating that I felt the book "was long overdue for a raking over the coals."

Charles indicated in his cover letter accompanying his reply that my comment might have been more appropriate if I had done the review. That comment was my review. I didn't feel there was any need for me to elaborate because the review expressed my feelings on the book, Charles also suggested that my negative feelings might have had an influence on the reviewer. Nothing could be further from the truth. The reviewer called me on the phone one day and asked if I would like a review of the Microcomputer Dictionary ... a negative one. I said I would, and as we discussed it we brought up common points about the book which we both agreed on. I don't think that can be construed as exerting influence. One other comment in the cover letter should be mentioned and responded to. Charles suggested that due to my

remark I have "requested (almost demanded) that the letters to come be derogatory or they won't be printed." Hey now, that's something I could take offense to! Anytime anyone gets the idea we only print certain letters in Kilobaud they've got another think coming! We print the good and the bad, whether they're directed at us or a dictionary. (As a matter of fact, we're thinking about starting a special section for printing the nasty letters which get sent to the #2 magazine but never get published. You know which one I mean . . . the one that used to be #1.)


Charles expressed a desire that his reponse be carried in its entirety (it has been) and that "some approach toward fairness" would be achieved if the response appeared in the Letters section ... even though that section has "fewer readers (by far)" than the book review section, What the heck ... in spite of the fact I wouldn't want people to start accusing me of being fair I'll be more than happy to put all of this in the book review section ... which is why we're all here, right?

In conclusion, I have three comments to make. First, my feelings concerning the book haven't changed one bit. Second I wonder if Charles Sippl was as interested in responding to the book review as he was in getting in a plug for every book he ever wrote ... or will write. Third, the editor always gets in the last word! - John Craig.

Dear John,

Thank you for inviting comments regarding the recent review of a book representing a three-year effort to begin an organization of microcomputer terminology, Microcomputer Dictionary and Guide. Dave Winthrop, the reviewer, makes a number of important points, and he's right on many of them. His main points seem to be that

information, that it is somewhat "encyclopedic" - a rare and rather odd complaint. His conclusion that the book is not well suited for the beginners and for regular microcomputer user's quick reference is totally at odds with a dozen or more other reviewers, principally the publisher of Kilobaud includes, "... A whopper ... well over 700 pages and the price is right at \$15.95 ... definitions ... are not brief ... almost enough to learn about computers just from reading the book ... a dictionary such as this is invaluable (italics mine)." Datamation found it to be "... A useful, comprehensive ... Dictionary and Guide." (May, 1976, page 34) Library Journal: "Microcomputers, offering compact, effective and economical control systems, will be used more and more in the future. This book is essential (italics mine) for the reference collection." (as quoted on the Cahner's Books "Promotion" Post the book contains too much | Card sent to all EDN Maga-

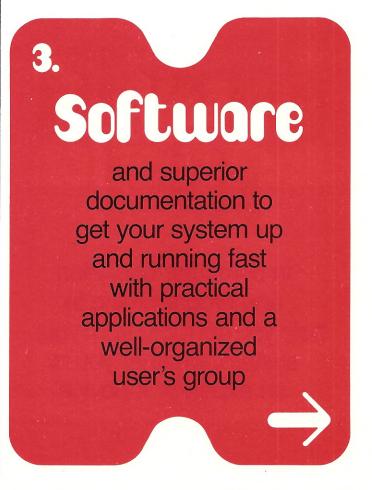


February, 1977).

Perhaps some experts like Mr. Winthrop don't need a reference to approximately 5000 microcomputer definitions and a few thousand allied electronics "explanations," but evidently others do. The March 15, 1977 issue of the highly respected Homebrew Computer Club Newsletter in its review of the Microcomputer Dictionary and Guide stated: "Newcomers and old-timers alike can benefit from this book. It's a ready reference with definitions that are up to date. Newcomers should find extensive use ..." Another publication developed by top people in the industry, Microcomputer Digest, had its review republished (italics mine) in Compute (May, 1976), the newsletter of the National Semiconductor User's Club, as follows: "After a careful detailed review of the dictionary, Microcomputer Digest, finds the definitions offered by the author to be Information Processing

zine subscribers in | clear, concise and consistent with industry usage. We recommend the book as an excellent reference tool."

> We might examine some comments from some of Kilobaud's competitors: Interface (March, 1976) states: "... An unbelievable compilation of 5000 terms, definitions and product procedure and applications explanations. This book is virtually indispensable and must become an integral part of every novice, amateur, experienced and professional in the microcomputer domain." Personal Computing magazine (March-April, 1977, p. 4) states "... 680 pages of very useful stuff . . . a book you might like to obtain . . . we plan to run a glossary ... taking our definitions ... from Microcomputer Dictionary and Guide."

To add a little frosting one might consider the usually quite stiff and critical British and Canadians, especially their professional reviewers.

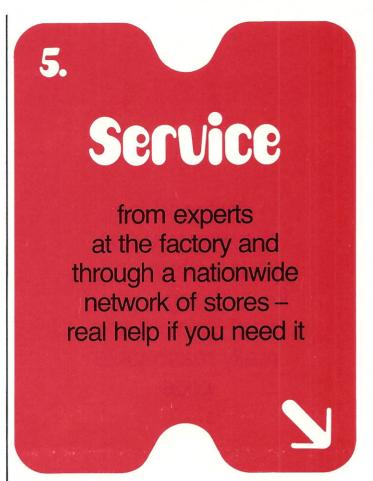

Self-Instruction Courses

in computer operation and programming to help you get more from your system, whether you're an expert or a novice

Society of Canada: "This is an excellent little reference! ... Barring a few such minor oversights, the author has produced a useful and worthwhile addition to and updating of the slowly growing list of computer and data processing dictionaries." (J. H. Toop, Book-Review Editor – CIPS Review, 4 August 1976.) And the British IPC Science and Technology Press Ltd. (Sept., 1976) stated, "... The number of new items, symbols and new techniques which lie in the wake of the microcomputer revolution make such a publication an essential life-raft (italics mine) for the engineer and designer." Copies of all full reviews are enclosed to be forwarded to Mr. Winthrop.

Now, no book is perfect but is this the book that deserves "to be raked over the coals?" (or have some personal "grapes soured" a bit). Mr. Winthrop's review was really quite perceptive (even though a bit of the editor's "arm" might have affected his conclusion),

and I should like to agree with him on several points. Reviewers have a right to "whack away" at books; that's their job, and most do so honestly and independently. Many of the definitions are indeed encyclopedic and reflect a particular "bent" I maintained when I began the project in 1974 after completing my article Computers as the main entry in the Encyclopaedia Britannica (1975-76 Editions). He is right, too, that some extra electronics definitions did creep in, possibly from a long range project I am doing to be published as Concise Microelectronics Encyclopedia in 1978 by Matrix Publishers,

Mr. Winthrop is accurate again by noting that the dictionary contains a large number of data communications terms. (I liked them so well I also produced a 10,000+ trim 1976 Data Communications Dictionary, Van Nostrand Reinhold.) But, every expert around is confirming that | data communications and data processing are "merging" and a major scientific and governmental effort is underway to attempt to differentiate between the two. But, why does the reviewer complain about "too much" information? He suggests that too many terms makes some harder to find. Why? Has the alphabet changed? Mr. Winthrop doesn't seem to like to find "similar" definitions in two places - but this was done for the user's convenience. We defined the terms as we found them in the literature, manuals, and so on. If "data registers" in one place also appears as "registers, data" in another, with one defined a bit more at length, who got hurt? Certainly not the reader! The reviewer appears to become a bit "pique-ey" when he jumps on us for defining some terms by giving examples of specific products. Come now! This is one of the best tutorial techniques known and used

by every teacher — and some of these terms, now representing commonplace products or techniques, were only just "invented" in 1974-5, and we chose to use the inventor's own words. The backs of pioneer dictionary writers are loaded with arrows — and even the umpteen editors of Webster and Funk & Wagnall are critized by Oxford and Random House on an almost annual basis.

But, Mr. Winthrop will have two of his wishes granted (1) "...a book one quarter this size" might contain a majority (not 99.5%, as the reviewer suggests) of the strictly microcomputer definitions needed for some. Such a book (Microcomputer Glossary and Reference) is presently "in press" by this author, has less than 200 pages (about \$7) and has many hundreds of "new, 1977" terms and concepts defined, as published by dilithium Press. (2) The Big Microcomputer Dictionary and Guide 2nd edition is under way and may



Assembly Manuals

that are by far the best and most complete in the world. You'd want illustrated, step-by-step instructions and a "we won't let you fail" pledge.

yet appear this year, or early 1978 — at about 500 pages with much culling and very careful editing and well over 2500 new definitions added to the "standards and basics" that have won significant praise from all but Kilobaud.

Again, we must challenge Mr. Winthrop's conclusion and John's desire to "rake" the book by advising that MITS thinks enough of it to include it with the sales of kits and systems computers. Many thousands of "begin-ners" appreciated this educational gift from MITS. (Several other suppliers also pack them with their systems, realizing that all of us need immediate lookup reference [browsing] updating.) They are sold in all MITS stores, BYTE Shops, and most other stores. The book is being translated into some foreign languages - and Cramer Electronics (the second largest distributor) regularly runs full page ads displaying the book after making an early (1975) "five-figure"

prepublication order.

We admit the book is not perfect, that Mr. Winthrop made some good points, but an editor's message asking readers to "rake" a particular book because of a personal peeve can be construed by some to be a bit of a "cheap shot." We all should be involved in doing everything we can to educate each other, to constantly continue to improve anything we do for personal computing, to support each other's efforts and to offer constructive criticism to each other. But, though a bit dismayed by "that" review, I appreciate your integrity for printing this letter in full.

And, I can find solace from those wonderful words from the "other" reviewers: "invaluable," "indispensable," "excellent," "essential," "life-raft for engineers and designers," "very useful stuff," "newcomers and old-timers alike benefit"... and Kilobaud is becoming a great magazine... Charles J. Sippl

Try Solar Energy

... computerized answer

to the energy crisis

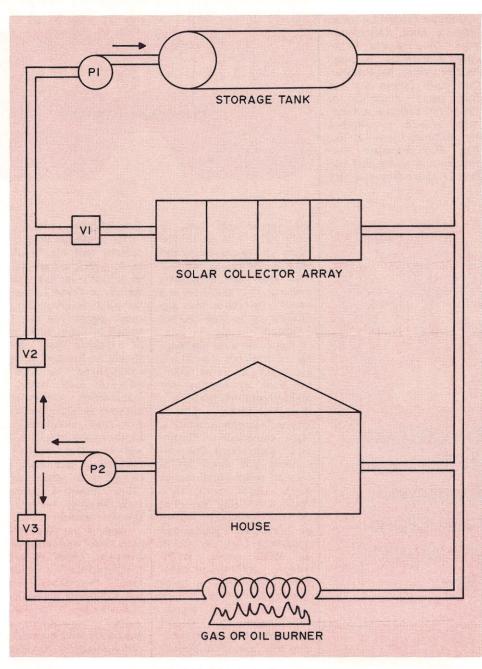


Fig. 1. Simple solar heating system.

Hal Chamberlin 29 Mead St. Manchester NH 03104 I've heard of using a microcomputer for solar heating control but before reading Hal's article I'm afraid I never gave it much thought (and as a result, didn't give much credit as a practical application). I can see now that it would really be the only way to implement such a system. Also, I've mentioned on several occasions how the hobbyist should be looking for dedicated controller applications as potential moneymaking opportunities. This is certainly one of them. (Oh, and don't miss Hal's idea for temperature sensing ... minus the analog-to-digital conversion you would normally expect.)

Hopefully, Hal's fame has preceded him and he doesn't require an introduction because he is certainly a pioneer among computer hobbyists. Way back in ancient times (1974) Hal was busy developing and writing up a graphics display for the 8008 in one of the first computer hobbyist publications, The Computer Hobbyist. Since then he has gone on to develop some fascinating computer generated music, the first hobbyist cassette interface and a floppy disk interface, just to name a few. — John.

The majority of hobby computer applications mentioned in these pages and elsewhere are of the general purpose type. That is, the hardware and software setup required for execution of the application in no way affects the system's ability to perform other functions as well. This article will be devoted to a dedicated application that requires continuous use of a small computer 24 hours a day.

During the winter it usually seems that the cold weather will never end and when the monthly fuel bill arrives you are reminded that winter is expensive as well as depressing. In many parts of the country the cost of heating a house has doubled or tripled in the last 5 years. Some people are investigating and implementing solar heating systems in an effort to cut

heating costs as well as conserve our nation's resources without giving up the personal comfort afforded by a constant room temperature. But getting the maximum benefit from a solar system requires constant attention to the system controls and a little educated guesswork. This is where a dedicated computer comes in.

Unfortunately, solar heating systems are complicated by one inescapable fact: the sun does not shine all the time. A minimum system that works satisfactorily is illustrated in Fig. 1. Here we have four major components; the solar collectors which heat water with sunlight, an oil or gas fired water heater, a large storage tank, and a heat distribution system within the house. In addition, two pumps and three valves control the flow of water through these components.




Fig. 3. Hypothetical heat pump performance.

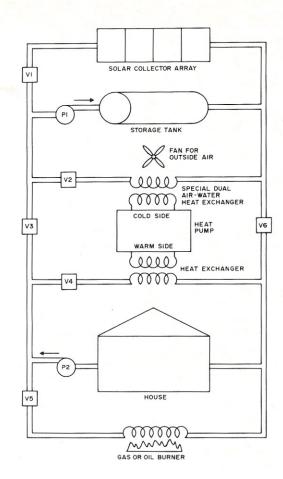


Fig. 2. A more sophisticated solar heating system.

The purpose of the storage tank is to save excess solar heat for use at night and on cloudy days. The fuel fired water heater is used only when there is insufficient solar heat and the stored heat has been depleted.

Two factors combine to determine the operating cost (proportion of time that fuel must be burned) of the system. One is the size of the storage tank and the other is the size of the solar array. A large tank is more likely to have sufficient capacity to tide over long cloudy periods and a large array will be able to recharge the storage system quickly while also heating the house. Unfortunately a high initial cost for oversize components must be borne to minimize the operating cost.

Control of the system in Fig. 1 is relatively simple. Inputs to the computer are the temperatures of the solar collector array, storage tank, and house, as well as the

desired house temperature (thermostat setting). Controller outputs operate the two pumps and three valves. Several operating modes are possible. For example, when the sun is out and heat storage is low, the system would alternate between pump 2 on, valves 1 and 2 open (heated water from collectors warms the house) and pump 1 on, valve 1 open (heated water from collectors goes into storage tank). When the sun is not shining, water from storage would warm the house via both pumps and valve 3. If heat storage is exhausted, pump 2 and valve 3 allow the fuel burner to come into play.

With this simple system, the best control decision can always be made by examining only present conditions. A convenient method of programming the control function is by use of a decision table such as Table 1. First, all of the indicated tempera-

ture comparisons would be made and then the corresponding table row would be located. The action column would indicate which pumps and valves to actuate. Although using a computer to control this system would be challenging, it can also be done with standard logic.

Enter the Heat Pump

A more interesting system with the potential of low operating cost without oversize components is illustrated in Fig. 2. A heat pump has been added which by appropriate valve actuation can transfer residual heat from either the outside air or the storage tank into the hot water system.

For those unfamiliar with heat pumps, they are essentially air conditioners turned backwards and optimized for producing heat. A heat pump literally pumps heat from a cold location to a warmer one using electrical energy. The advantage of a heat pump is that it requires less energy to pump a given amount of heat than would be required by a resistance heater to create the same amount of heat! For example, an ordinary electric heater will produce about 3400 BTU (857 K-cal) per killowatt hour of electrical energy, but a heat pump may

produce 7000 to 14000 BTU (1765 to 3530 K-cal) with the same amount of energy. The ratio of pumped heat per KWH to 3400 BTU per KWH is termed the "coefficient of performance" or CP of the heat pump. The interesting part of all this is that the CP is greatly influenced by the temperature difference between the source of heat and its point of use as illustrated in Fig. 3. Thus depending on the temperature difference and the relative costs of electricity and oil, it sometimes will be more economical to use the heat pump instead of the oil burner during extended cloudy periods.

Another advantage of the heat pump is that it can extract additional heat from the water in the storage tank after it has cooled to room temperature and otherwise become useless. Doing this could almost double the effective heat capacity of the tank. Also when the sun did return, the solar collectors would be slightly more efficient in heating the colder water.

In order to better understand the many operating modes of the system and likely conditions that would suggest their use let us look at a few. Keep in mind that the

relative costs of fuel and electricity as well as typical weather patterns in your area will affect the frequency and advantage of a particular operating mode. However energy costs are changing constantly, and while electricity may be so expensive that the heat pump would be seldom used now, it is likely that fuel costs, particularly natural gas, will rise more rapidly than electricity in the future.

The solar collector array, storage tank, fuel burner, and house, along with the two pumps and valves 1, 3, and 5, function in the same combinations as the simpler system in Fig. 1. This is assuming that valves 2 and 4 are closed and valve 6 is open to bypass the heat pump. Thus most of the entries in Table 1 are still valid. Differences generally occur when conditions call for burning fuel. At this point there are a number of possibilities. More heat may be extracted from the storage tank to tide over a brief additional cloudy spell by pumping storage tank water through the dual fluid heat exchanger on the cold side of the heat pump. The heat pump would extract additional heat from the storage water and transfer it to its warm side where it now heats

separate water circuit (created by closing valves 3 and 6) which includes the house. Electrical energy is, of course, consumed in doing this, but until the storage tank water gets very cold, it can be more economical than burning fuel.

If the outside air temperature temporarily rises to a reasonable level (as it often does just before a snow storm and following cold spell in New England), heat can be extracted from the outside air by running the fan on the dual heat exchanger. Now heat from the outside air is transferred to the warm side of the heat pump which can then flow into the house, and if cold weather is really on the way, the storage tank.

Optimum control of this system is considerably more involved than control of the previous one. Optimum operation can be defined as the least total cost (fuel plus electric bills) while maintaining the desired room temperature under all conditions. Besides an added fan and some more valves to operate, the computer/controller will need additional input data to achieve optimum control.

The outdoor temperature reading is now needed since it greatly affects the efficiency of the heat pump. If it is

- T1 = Temperature of solar array
- T2 = Temperature of storage tank

13 =	Actual	temperature	of	the	house
T4 =	Desired	temperature	01	the	house

Pres	ent Condition	s		Actions	5				
T4>T3	T1 > T2	T1>T3	T2>T3	P1	P2	V1	V2	V3	Effect
NO NO NO NO NO NO NO NO YES YES	NO NO NO YES YES YES YES NO NO	NO NO YES YES NO NO YES YES NO NO YES	NO YES NO YES NO YES NO YES NO YES	OFF OFF OFF ON ON ON OFF ON	OFF OFF OFF OFF OFF ON ON	OFF OFF OFF ON ON ON OFF OFF	OFF OFF OFF OFF OFF OFF OFF	OFF OFF OFF OFF OFF OFF ON	IDLE IDLE IDLE IDLE SUN HEATS TANK BURN FUEL TANK HEATS HOUSE SUN HEATS HOUSE
YES YES YES YES YES	NO YES YES YES YES	YES NO NO YES YES	YES NO YES NO YES	OFF ON ON OFF OFF	ON ON ON ON	ON ON OFF ON ON	ON OFF ON ON ON	OFF ON OFF OFF	SUN HEATS HOUSE BURN FUEL, SUN HEATS TANK TANK HEATS HOUSE SUN HEATS HOUSE SUN HEATS HOUSE

Table 1. Solar system decision table.

quite cold outside and using residual heat in the storage tank is not appropriate, it may be best to go ahead and burn fuel. On the other hand, unusually warm but cloudy spell might signal that outdoor heat should be pumped into the storage tank for use later. Input regarding the weather forecast is helpful in making such a decision. The system also needs to know what the electric rates and the cost of fuel are. Some electric utilities are considering rates that vary according to the time of day, with power being cheapest late at night. As a result, the time of day would be a useful input to the system. Also, if the user customarily reduces the termperature at night to conserve fuel, the system can be programmed to do that automatically.

Hardware

Besides all of the solar panels, heating equipment, pumps, and valves, what kind of computer hardware is necessary to get into sophisticated computer controlled solar heating systems? First it should be obvious that great computation speed is not needed, since input conditions change slowly and relatively few output devices need to be controlled at an equally slow rate. Some hobbyists could interpret this fact as a suggestion that their present computer could easily perform the control function as a background task without materially affecting execution speed of other applications running at the same time. While this is certainly true, solar system control is a fulltime task. Invariably the time-shared computer need to be turned off to install a new board or a program will run wild wiping out memory or some other minor disaster will happen. Consequently, a computer should be dedicated to the control task and not used for anything else.

Since speed is not a factor and the control program is

not likely to get extremely large, one of the trainer kits should be ideal. Examples are the \$99 SC/MP kit from National Semiconductor, the KIM-1 from MOS Technology, or the F-8 Survival Kit from Mostek. To the basic machine would be added some external memory as well as additional I/O capability. Besides low cost, another advantage of the trainer kit is that the power requirement is very low; after all, the goal is to cut energy consumption. For automatic recovery from power failures and long term permanence, the control program should be stored in ultraviolet erasable programmable read-only memories (EPROM).

Since a majority of the needed inputs are temperature readings, an inexpensive method of sensing temperature is needed. One possibility is to use a thermistor as the timing element in a 555 oscillator circuit. The outputs of up to 8 oscillators may be connected to a single 8-bit input port. A software routine would count the number of cycles from a particular oscillator in a fixed time period and thus compute the frequency. A calibration table would be stored in memory so that the corresponding temperature can be determined.

A time of day input can be accomplished in a number of ways. If the computer has an interrupt input (most do), it can be connected to a source of 60 Hz and the program would keep track of time by counting cycles. Some kits such as the KIM-1 and F-8 kit use crystal oscillators and already have programmable interval timers built-in that can be programmed for a time of day function. One could also interface a clock chip and reduce the amount of required software.

The remaining inputs are parameters set by the user such as the desired room temperature, weather forecast, and fuel cost tables. This data would be read and

stored in RAM memory. Most of the trainer kits have a serial input which could be temporarily connected to a terminal or even another computer when updated information is required. Alternatively a calculator style keypad could be interfaced, or it may be standard equipment on some trainer kits.

All of the system outputs can probably be accomplished with a single 8-bit output port. Each bit would operate a relay which in turn would complete circuits to the various valves and pumps. A fancy control program might also be able to give a report on the solar system performance and an estimate of the fuel and power used. This would alert the user to possible equipment problems or wasteful living habits. The serial port and temporary hookup to a terminal would be a good way to output such a report.

As with most interesting applications, software is the key to a system that does all that is desired. Developing the software for a dedicated application is a little different from most software development. The reason is that the computer on which the software runs (called the object machine) is unlikely to be able to execute the usual software development aids such as an assembler or text editor. Also the object machine lacks effective probably debugging aids such as a monitor or front panel. One could use the pencil and paper method with additional careful checking to minimize the amount of debugging required. One could also utilize a full blown computer having the same microprocessor chip as the object machine to prepare the program and do the initial An example debugging. would be the use of National's Low-Cost Development System (LCDS) to develop a program to run on the \$99 SC/MP Evaluation Kit.

Of course the control program itself is the interesting part of the whole project. A decision table routine for the first system is fairly simple and gives the best performance possible for that type of system. An optimum control program for the heat pump system is considerably more challenging however. First accurate data about the heating system components is required. For example, a CP curve for the chosen heat pump will be needed as well as data on the solar collector performance based on sunlight intensity and angle which changes throughout the year. A detailed analysis leading to absolute peak performance would also consider factors such as heat exchanger efficiency and power consumption of the pumps.


Next, some fairly simple but tedious calculations must be done to determine under what conditions a particular operating mode will be the most economical. These could be done once using a BASIC language program on another computer and the results translated into a decision table. Possible difficulties include the large size of the resulting table and that the calculations would have to be repeated whenever a factor which was assumed to be constant (such as fuel price) changes. These drawbacks can be overcome by building these calculations into the control program itself. Then it can adapt automatically as conditions change.

As you have probably gathered by now this is really a blue sky application (pun intended) that is not quite practical yet and would not appeal to the majority of hobbyists. However the same was said regarding computers in general only three years ago. Successful implementation of a computer controlled solar heating system would certainly quiet the skeptics who question the usefulness of a home computer.

PREMIUM QUALITY

When you buy a product with the Seals Electronics name on it you know you are purchasing a product that is setting the highest standards in the industry. Each Seals product is engineered for years of dependable, trouble-free service. You can be sure that it will work right each and every time it is used. Although Seals components are moderately priced, we use only premium quality parts to insure the most reliable performance available. When you purchase a product from Seals Electronics, remember, you are getting the newest, most innovative and dependable product available.

HERE ARE MORE REASONS WHY SEALS . . . SELLS IT ALL

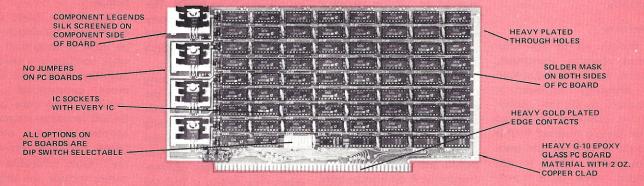

SEALS DELIVERY

How many times have you waited for weeks or months for that special part you ordered . . . Well, we at Seals Electronics have a NO-WAIT policy. We promise to ship your order no later than ten working days after recieving it. In many cases, we can even provide same-day service to our customers. If we cannot fill your order your money will be returned to you right away.

SEALS GUARANTEE

A guarantee is only as good as the company that stands behind it. That's why we at Seals Electronics, Inc. guarantee every product we design and sell. If a component fails to work properly, simply return it to your nearby Seals dealer for prompt repair or replacement.

SEALS COMPONENTS AVA	AILABLE	KIT	ASSEMBLED
ITEM NO.	DESCRIPTION	PRICE	PRICE
4KROM	4K Read Only Memory Card	\$119.00	\$179.00
8KSC	8K Static Memory Card 500 nsec	269.00	369.00
8KSC-Z	8K Static Memory Card 250 nsec	295.00	395.00
BBUC	Battery Back-Up Card	55.00	68.00
68 KSC	8K Static Memory Card SWTPC 6800 Compatible Products	269.00	369.00
68WWC	Wire Wrap Card SWTPC 6800 Compatible Products	35.00	45.00
68 EXT-S	Extender Card [Small] SWTPC 6800 Compatible Products	19.00	25.00
68 EXT-L	Extender Card [Large] SWTPC 6800 Compatible Products	29.00	39.00
88 WWC	Wire Wrap Card	37.50	47.50
88 EXT	88 Extender Card	29.00	38.00
ASSEMBLY	AND OPERATING MANUALS AVAILABLE FOR	ALL ITEMS .	\$4.00 ea.

FOR MORE INFORMATION
CONTACT YOUR NEAREST SEALS DEALER
OR CALL FACTORY DIRECT

SEALS DEALERS/DISTRIBUTORS":

or Distributor in your area. If there is not one in your area, we assure you there will be one soon. But, until that time, please call our factory at [615] 693-8655.

BYTE SHOP

813 N. Scottsdale Road P.O. Box 28106 Tempe, Arizona 85281 [602] 894-1129

ARIZONA MICRO SYSTEMS

3240 West Larkspur Phoenix, Arizona 85029 [602] 942-8405

CHANNEL RADIO AND ELECTRONICS

18 East Ortega Street Santa Barbara, CA. 93101 [805] 965-8551

BYTE SHOP of SAN FRANCISCO 1093 Mission Street San Francisco, CA. 94103 [415] 431-0640

THE COMPUTER MART

625 W. Katella Avenue no. 10 Orange, CA. 92667 [714] 633-1222

ULTRABYTE, INC. P.O. Box 370 Exectuive Park Plaza Bldg. 7281 Plaza Street, Suite no. 8 Westminister, CA. 92683 [714] 892-4679

BYTE SHOP of LAWNDALE 16508 Hawthorne Bivd. Lawndale, CA, 90260 [213] 371-3421

BITS, BYTES AND PIECES

*COMPUTER MART DISTRIBUTING CO.

Orange, CA. 92667 [714] 633-4634

BYTE SHOP of TARZANA

Tarzana, CA. 91356

A-VIDD ELECTRONICS

2210 Bellflower Blvd. Long Beach, CA. 90806 [213] 426-5526

CANADA

160 Elgin Street Ottawa, Canada K2P 204 [613] 236-7767

THE COMPUTER PLACE

186 Queen Street West Toronto, Canada M5V 121 [416] 598-0260

*TRINTRONICS LIMITED

186 Queen Street, W. Toronto,Ontario, Canada M5V 1Z1 [416] 598-0262

BYTE SHOP/ARAPAHOE CO.

Englewood, CO. 80110 [303] 761-6232

CONNECTICUT

NATIONAL COMMUNICATION

INDUSTRIES CO. One River Road Cos Cob, Conn. 06807 [203] 661-2800

SUNNY COMPUTER STORES, INC.

University Shopping Center 1238 A. S. Dixie Highway Coral Gables, Fla. 33146 [305] 661-6042

WILLIAMS RADIO AND TELEVISION, INC.

2062 Liberty Street P.O. Box 3314 Jacksonville, Fla. 32206 [904] 354-5460

COMPUTER HUT

5905 N.W. 151st Street Miami Lakes, Fla. 33014 [305] 821-2667

BYTE SHOP of MIAMI

7825 Bird Rd. Miami, Fla. 33155 [305] 264-BYTE

ATLANTA COMPUTER MART

5091-B Buford Highway Atlanta, GA. 30340 [404] 455-0647

C & I COMMUNICATION

P.O. Box 52 Interstate 70, State no. 1 Cambridge, Ind. 47327 [317] 478-3749

QUANTUM COMPUTER WORKS

DATA DOMAIN of INDIANAPOLIS 7027 Michigan Road Indianapolis, Ind. 46268 [317] 251-3139

The DATA DOMAIN of WEST LAFAYETTE INDIANA

West LaFayette, Ind. 47908

*HOBBYTRONIC DISTRIBUTORS

1218 Prairie Drive Bloomington, Ind. 47401 [812] 336-6380

THE DATA DOMAIN

506 South College Bloomington, Ind. 47401 [812] 334-3607

itty bitty MACHINE COMPANY of EVANSTON

1316 Chicago Ave. Evanston, III. 60201 [312] 328-6800

itty bitty MACHINE COMPANY

Lombard, III. 60148

AMERICAN USED MICRO-PROCESSOR EQUIPMENT & SUPPLY CORPORATION

P.O. Box 515 20 N. Milwaukee Ave Prairieview, III, 60069 Prairieview, III. 60069 [312] 634-0076

KENTUCKY

DATA DOMAIN of LOUISVILLE

DATA DOMAIN of LEXINGTON

312 Production Court Louisville, KY 40299 [502] 499-1551

THE COMPUTER WORKSHOP, INC.

11308 Hounds Way Rockville, MD 20852 [301] 468- 0455

CHEAP, INC. 7338 Baltimore Ave., Suite 200 College Park, MD 20740 [301] 779-7997

COMPUMART, INC. 1250 N. Main Street Ann Arbor, MI 48104

THE COMPUTER MART

1097 Lexington Waltham, MA 02154 [617] 890-0677

COMPUTER WORKSHOP of KANSAS CITY 6903 Blair Rd. Kansas City, MO 64152 [816] 741-5055

NEW JERSEY

THE COMPUTER MART of NEW JERSEY, INC.

WILLIAM ELECTRONIC SUPPLY

THE COMPUTER MART

151 Kline Blvd. Colonia, NJ 07067 [201] 574-2173

THE MEMORY MERCHANT

Spencerport, NY 14559 [716] 352-1325

THE COMPUTER MART

314 5th Ave. New York, NY 10001 [212] 279-7757

*MJB RESEARCH AND DEVELOPMENT

36 W. 62nd Street New York, NY 10023 [212] 245-8530

COMPUTER MART of LONG ISLAND East Meadow, NY 11554

East Meadow, NY [516] 794-0510

CY-COMP 1154 Desert Street Uniontown, Ohio 44685 [216] 877-6423

DIGITAL DESIGN

7694 Camargo Rd. Cincinnati, Ohio 45243 [513] 561-6733

BYTE SHOP, INC.

2033 S.W. 4th Portland, OR 97201 [503] 223-3496

SOUTH CAROLINA

BYTE SHOP of SOUTH CAROLINA

Columbia, SC 29 [803] 771-7824

TENNESSEE

MICRO COMPUTER SYSTEMS

Route 36, McFee Ros Knoxville, TN 37922 [615] 966-9849

*MCED COMPANY

Suite 101, 1600 Hayes Street Nashville, TN 37203 [615] 329-1979

PENNSYLVANIA

PERSONAL COMPUTER CORPORATION Routes 30 and 352 Frazer Mall Frazer, PA 1935 Frazer, PA 1935 [215] 647-8463

THE COMPUTER ROOM

Salt Lake City, UT 84105 [801] 466-7911

EMR SPECIALISTS

1921 Dogwood Lane P.O. Box 167 Vienna, VA 22180

WASHINGTON

AMERICAN MERCANTILE COMPANY, INC.

Seattle, WA 98134 [206] 624-6141

WISCONSON

itty bitty MACHINE COMPANY

2221 East Capital Shorewood, WI 53211 [414] 961-2430

EUROPE & ASIA

*BARSADO LIMITED

*DENOTES DISTRIBUTORS ONLY

SEALS ELECTRONICS WESTERN REGIONAL OFFICE

Pete Bickerdike 178 Del Canto Lane Santa Barbara, CA 93110 [805] 964-5063



BOX 11651, KNOXVILLE, TN. 37919

[615] 693-8655

Simplified Billing System

... in BASIC for the small business

AIRLIN	E: UNITED		STAT	ION: L	AX				
PERIOR	DEC 1 TO	DEC 15							
*****	*****	*******	****	*****	*****	*****	******	*****	*****
DATE	ORDER#	PICK-UP TIME	DI	STINA	TION	DELV TIME	CHG\$	CODE	BAG
*****	******	******	*****	*****	*****	******	******	*****	*****
1	127486	0700		RRAN		1100	5	R	1
1	127495 326145	0800 1500		ENTUR		1200 2355	5 35	R SP	1
3 4	347898	1100		IN NUY		1302	10	SC	3
6	347888	1300		GLEWO		1645	0	COD	3
15	491876	2200	H	ATT L	AX	2245	4	SP	5
2 REG	S + 2 S	SPLS +	1	CODS	+ 0	NO CHG	+ 1	svc c	HG
TOTAL	DELIVERIE	S = 6							
	DELIVERIE CHARGES =								

Carl Denver Warren II 2980 W. 235th Apt. 12 Torrance CA 90505

Several months ago a small transportation company contacted me regarding a billing problem they had. They wanted a system that could take multiple entries, keep track of them, give a total of all, plus break down the totals of the different types of deliveries. There was no need to save data on tape or build data up over a period of time, as the data would be presented just prior

to the billing date. They did need from 2 to 4 copies with the ability of making this change with little trouble.

After analyzing the problem, a set of specifications was drawn up and agreed upon before creating the actual program. (In application programming, this is a must and saves a lot of trouble later.) The actual program was written in MITS 8K 680 BASIC Version 1.0 Revision 3.2. The program was designed to run on the following system configuration.

- a. MITS ALTAIR 680B with 17K memory.
- b. SOUTHWEST AC 30 cassette interface.
- c. SOUTHWEST CT 1024 terminal modified for 64 characters and scrolling.
- d. AXION EX-800 electrosensitive printer, interfaced for RS-232C serial input and strapped for 1200 baud.

The program incorporates many cursor control functions to clean up the screen and prevent possible errors by displaying previously entered data. The print ASCII characters (PRINT CHR\$), 2910 or 3010, is interpreted by the AXIOM printer and changes the size of type between 40 and 80 columns. This provides for maximum control of formating the output. Null is used to slow the execution time of BASIC as it is presented to the printer and prevents garbling.

The application called for 13 separate variables which were to be stored then read to the output in a first in, first out manner. Therefore, each variable was dimensioned, and the initial value set to zero. Lines 66 through 140 are the input portion of the program and is the part of the program where the work of building the array is done. The array grows until terminated by the input of 99 for a date - this was done since the date could never be less than 1 or greater than 31 and provided a means of

leaving the input loop.

Once 99 is input for the date, the output routine which starts at line 700 takes over. The work is done in lines 903 to 945. The array is decremented each time through. However, the data is not destroyed but remains intact. When the last piece of data is read the totals are printed, the values of which are saved in the array as

specified in the input lines. Lines 1500 to 1520 are a subroutine that prints the totals in the specified order. In the program I have specified 2 copies. Therefore, after the totals are printed the program then tests the value of I in lines 1310 and 1320 (which determines the number of copies) to determine where to send the program next. When the required

amount of copies is created, the program reinitializes itself by returning to line 9, which clears all variables.


Although this program may never be of any use to anyone other than a company doing similar work, it does demonstrate one method used to save data in an array and what I feel is an interesting method of printing the final output.

```
1 REM
2 REM
                                        MULTIPLE ITEM STATEMENT
                                 CARL DENVER WARREN II / AUG 1976
 5 REM CLEAR STRING SPACE AND DIMENSION ARRAY FOR NAMED VARIABLES 9 NULLO: CLEAR 4000: GOSUB62
  11 DIMD(100),O$(100),P$(100),D$(100),L$(100),C(100),E$(100),B(100)
 15 REM INPUT NONE MATRIXED ITEMS
20 INPUT"AIRLINE: ";A$:INPUT"STATION: ";S$
 20 INPUT ARLINE: ";A$:INPUT STATION: "S$
30 GOSUB 62
40 INPUT "MONTH ";M$:GOSUB 62:INPUT "STARTING DATE: ";W:GOSUB 64
50 INPUT "END DATE: ";U:GOTO70
55 REM SCREEN CONTROL SUBROUTINES (62) HOME CLEAR SCREEN
56 REM (64) GENERATES A SPACE
62 PRINTCHR$(22):RETURN
  64 PRINTCHR$(32):RETURN
64 PRINTCHR$(32):RETURN
65 REM SET VARIABLES TO 0
66 A=0:C=0:Z=0:X=0:M=0:Q=0:V=0:H=0
69 REM START OF MATRIXED VARIABLES
70 INPUT"DATE: ";D(A):GOSUB62
71 IF D(A)=99THEN 790
72 IF D(A))99THEN70
73 A=A+1
90 INPUT(SORDER #2:OO(G):COSUB 62:C=C
73 A=A+1
80 INPUT"ORDER #";O$(C):GOSUB 62:C=C+1
90 INPUT"PICK-UP TIME: ";P$(Z):GOSUB62:Z=Z+1
100 INPUT"DESTIN ATION: ";D$(X):GOSUB62:X=X+1
110 INPUT"DELV TIME: ";L$(M):GOSUB62:M=M+1
120 INPUT"CHG: ";C(Q):GOSUB62:TC=TC+C(Q):Q=Q+1
130 INPUT"CODE: ";E$(V):GOSUB62
131 IFE$(V)="R"THEN R=R+1
132 IFE$(V)="R"THEN RC=NC+1
134 IFE$(V)="NC"THEN NC=NC+1
134 IFE$(V)="COD"THENCOD=COD+1
135 IFE$(V)="SC"THENSC=SC+1
139 V=V+1
140 INPUT" # OF BAGS: ";B(H):TB=TB+B(H):H=H+1:GOTO70
700 REM BEGIN OUTPUT ROUTINE
 700 REM BEGIN OUTPUT ROUTINE
701 REM CONTROL CHR ARE FOR FORMATING OUTPUT OF AXIOM PRINTER
702 REM NULL PROVIDES SUFFICIENT TIME FOR FIFO OF PRINTER TO
703 REM CLEAR.
750 PRINTCHR$(29);TAB(32)"BILLING COPY":GOTO800
750 NULL20:PRINTTAB(36)"FILE COPY":GOTO800
800 PRINTCHR$(30);"QUICK FOX TRANSPORTATION SERVICE"
810 PRINT "8921 SOUTH SEPULVEDA BOULEVARD"
820 PRINT "LOS ANGELES, CALIFORNIA 90045":GOSUB64
830 PRINT"AIRLINE: ";A$;TAB(25)"STATION: ";S$;GOSUB64
832 PRINT"PERIOD: ";M$;" ";W;" ";"TO";" ";M$;" ";U;CHR$(29)
 870 GOSUB1900: GOSUB64
 880 PRINT"DATE ORDER #
890 PRINT"DELV CHG$ COL
                                                                                              PICK-UP DESTINATION ";
BAGS":PRINTTAB(21)"TIME";TAB(50)"TIME"
                                                                       CODE
 900 GOSUB1900:GOSUB64


903 A=0:C=0:Z=0:X=0:M=0:Q=0:V=0:H=0

920 PRINTD(A);TAB(9);O$(C);TAB(21);P$(Z);TAB(34);D$(X);TAB(50);L$(M);
 921 PRINTTAB(57);C(Q);TAB(65);E$(V);TAB(71);B(H)
930 A=A+1:C=C+1:Z=Z+1:X=X+1:M=M+1:Q=Q+1:V=V+1
935 H=H+1
940 IF D(A)=99 THEN 1100
945 GOTO 920
 1290 REM THIS ROUTINE COUNTS THE NUMBER OF COPIES OUTPUT 1300 I=I+1
1310 IF I=1 THEN 750
1320 IF I=2 THEN 9
1400 GOSUB64
1400 GOSUB64
1490 REM THIS ROUTINE PROVIDES THE OUTPUT TOTALS OF ALL THE
1491 REM MATRIXED VARIABLES. EACH VARIABLE WAS INCREMENTED BY
1492 REM 1 DURING INPUT. WHEN THE OUTPUT ROUTINE IS BEGUN
1493 REM EACH ITEM IS DECREMENTED BY ONE.
1500 PRINT; "REGS"; "+";SP;" SPLS"; "+";COD;" CODS"; "+";NC;
1501 PRINT" NO CHG"; "+";SC; "SVC CHG";GOSUB62
1510 PRINT"TOTAL DELIVERIES = ";A:PRINT"TOTAL CHARGES = ";TC
1520 PRINT"TOTAL BAGS = ";TB:RETURN
1900 FOR J=0TO79:PRINT"*";:NEXTJ:RETURN
```

HOBBY-WRAP WIRE-WRAPPING, STRIPPING, UNWRAPPING TOOL FOR AWG 30 (-025 SQUARE POST)







STRIP

WRAP

UNWRAP



TYPES OF WRAP


■ A "Regular" bit wraps the bare wire around the terminal. A "Modified" bit wraps a portion of insulation around the terminal in addition to the bare wire. This greatly increases the ability to withstand vibration.




HOBBY-WRAP®

WIRE-WRAPPI

STRIP WG, UNWRAPPING TOOL FOR AWG 30 (-025 SQUARE POST)







STRIP

WRAP

UNWRAP

OK MACHINE & TOOL CORPORATION


3455 CONNER STREET, BRONX, NEW YORK, N.Y. 10475 U.S.A. • PHONE (212) 994-6600

TELEX: 125091 TELEX: 232395

DIGITAL DATA RECORDERS



USING 3M DATA CARTRIDGES



MODEL 3M3 - \$220.00

2SIO (R) CONTROLLER - \$190.00

MODEL 3M3

Featuring the radically new "Uniboard" method of construction for data cartridge drives. The major computer makers are changing to cartridges at a rapid pace because of the freedom from binding and greater data reliability. Operates in the phase encoded self-clocking mode which provides greatly enhanced freedom from speed variation problems and allows 100% tape interchangeability between units.

Uses the 3M Data Cartridge, model DC 300. This cartridge contains 300 feet of .250 tape in a sealed plastic container. Using four tracks you can record nearly 2 megabytes of data on a cartridge.

SPECIFICATIONS:

Full software control of record, play, fast forward and rewind. LED indicates inter-record gaps. EOT and BOT are sensed and automatically shut down recorder. Feedback signals send reset and inter-record gap signals back to the computer so that software searching for inter-record gaps at high speed can be accomplished. Can also be operated manually by means of the switches on top which parallel the software control signals. \$199.95 until April 1, 1977. \$220.00 after April 1, 1977. Includes Phase Encoder Board (ACI).

FOR 8080, 8085, AND Z80 USERS

Comes complete with software listing for the programs in the 2SIO (R) ROMs. Can be controlled by any of the commonly used I/O boards. Send for complete documentation and interfacing instructions on 3M3 and 2SIO (R) (\$3.00). These programs provide full software control.

2SIO (R) CONTROLLER (BOOTSTRAP ELIMINATOR)

This is a complete 8080, 8085, or Z80 system controller. It provides the terminal I/O (RS232, 20 mA, or TTL) and the data cartridge I/O, plus the motor controlling parallel I/O latches. One kilobyte of on board ROM provides turn on and go control of your Altair or Imsai. No more bootstrapping. Loads and Dumps memory in hex on the terminal, formats tape cartridge files, has word processing and paper tape routines. Best of all, it has the search routines to locate files and records by means of six, five, and four letter strings. Just type in the file name and the recorder and software do the rest. Can be used in the BiSync (IBM), BiPhase (Phase Encoded) or NRZ modes with suitable recorders and interfaces. \$190, wired and tested; \$160, kit form.

AUDIO CASSETTE INTERFACE (ACI)

This is the phase encoding board used in the 3M3. Additional components on the board enable you to use audio recorders in the KC standard or the new PE 2400 (2400 baud) systems. Can also be used for Tarbell if you have an 8251 Intel I/O chip. Required if you use an audio cassette with the 2SIO (R) above. \$50, wired and tested; \$35, kit form.

For 6800 Users: Software programs and I/O board for SWTP are under development. Limited software available now. Ask for 6800 data with \$3.00 Documentation package. These programs will provide full software control.

CARTRIDGE AVAILABILITY

Cartridges are made by 3M, ITC, Wabash and others. They are available at all computer supply houses and most major computer service centers. We can supply them at normal current list prices.

"COMPUTER AID" and "UNIBOARD" are trademarks of the NATIONAL MULTIPLEX CORPORATION. The 3M Data Cartridges are covered by 3M Patents and Marks. "UNIBOARD" Patents Pending.

OVERSEAS: EXPORT VERSION - 220 V - 50 Hz. Write factory or - Megatron, 8011 Putzbrunn, Munchen, Germany; Nippon Automation 5-16-7 Shiba, Minato-Ku, Tokyo; Hobby Data, FACK 20012, Malmo, Sweden; G. Ashbee, 172 Ifield Road, London SW 10-9AG.


For U.P.S. delivery, add \$3.00 Overseas and air shipments charges collect. N.J. Residents add 5% Sales Tax. WRITE or CALL for further information. Phone Orders on Master Charge and BankAmericard accepted.

Canadian Distributor: Trintronics Limited 186 Queen Street West Toronto , Canada M5V 1Z1 Tel: (416) 598-0262





NATIONAL MULTIPLEX CORPORATION

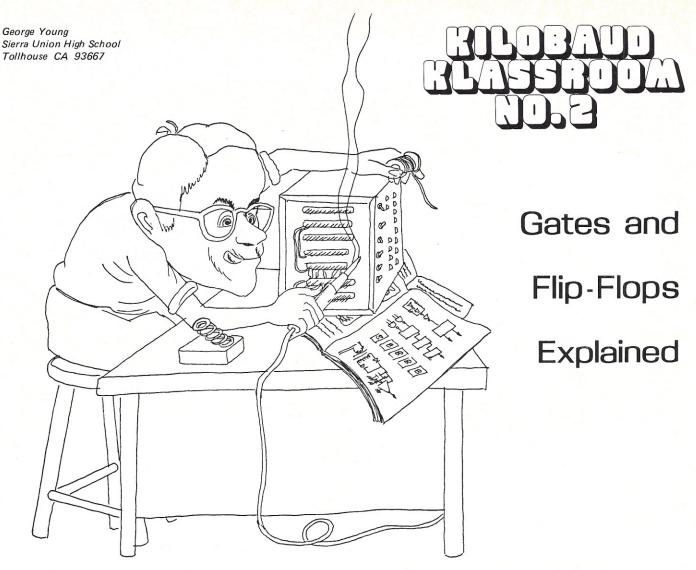

class meeting once a month is for the birds! The first thing we had better do each new class session is to have a quick review. Some newcomers to Kilobaud will have just started their subscription. Or worse yet, they will have picked up a copy off the newsstand and want to know what they have missed. Then they can subscribe and get the previously published class or classes.

Review

Last time we listed what we would need to get started and had some tips on parts storage and on scrounging. We started to learn how to read schematics, pinouts on ICs, learned some symbols, wiring conventions, and met the Superstrip (a solderless breadboard). We learned how to test LEDs and ICs, and we had a little theory on inverters, NOT symbols,

Boolean algebra, series and parallel connections of resistors and capacitors. It was a fair beginning.

Preview

The Kilobaud Klassroom student console has been written up as a separate article and can be found elsewhere in this month's issue. Some nonstudents of Kilobaud Klassroom may want to build one without taking the course. This time we will introduce the 7400 gate, the NAND function, and the NAND truth table. We will construct a latch. We will show you a method of getting circuits into operation without using a PC board. We will construct a simple logic probe. We'll meet the 7segment readout, and we'll meet the flip-flop.

Experiment #5
The 7400 Gate
Purpose:

- 1. To investigate the 7400 IC.
- 2. To study the NAND logic function.
- 3. To explore the NAND Truth Table.

Equipment:

1.7400 IC

New Symbols:

- 1. Fig. 1a shows the 7404 inverter (review).
- 2. Fig. 1b shows the NAND logic symbol.
- 3. Fig. 1c shows the 7400 NAND gate pin outs.

Circuit:

Figs. 2 and 3 contain the diagrams for this experiment.

Procedure

Plug the 7400 into the Superstrip with the notch between pins 1 and 14 facing you. Connect pin 7 to the rail of the Superstrip. Connect pin 14 to the + rail of the Superstrip. Always connect ground and power connect ground and power con-

nections first.

Connect an LED and a 100 Ohm resistor as shown in Fig. 2 to pin 3 of the chip. The LED should be out. Now ground pin 1 with another piece of wire. The LED should turn on. Remove the wire from pin 1 and connect input pin 2 to ground. The LED should again turn on. Leave the wire connected to pin 2. Take another piece of wire and ground input pin 1 again. The LED should remain on. Repeat this test procedure for each of the remaining three gates in the DIP package.

Theory

Fig. 3a shows the internal structure of just one gate section in the 7400 package. Hey, there are a whole bunch of goodies in there. Aren't you glad I don't have you build up a 7400 gate from discrete (discrete = indiv-




Fig. 1. Symbols and pinouts for Experiment #5.





Fig. 2. NAND gate test circuit.






Fig. 3. The NAND gate.

idual) components?

What I am trying to emphasize here is that electronics changes. We used to build up a NAND gate in this fashion several years ago, but we don't do it that way any more. We don't even bother to draw the innards any more; we only concern ourselves with what goes in and

what comes out.

The rule for the operation of a NAND gate is that the output is low only when both inputs are high. If either input goes low, then the output will go high. When we test a 7400 gate element, this is exactly what we look for. If each section in the DIP package does not obey the instructions that we give it, then: a) we're doing our testing wrong, or b) the chip has a defective section. If one of the four sections of a chip tests bad, then you can be reasonably certain that you are testing correctly. If all sections of two or more chips test out bad, then you can be reasonably certain that you are doing something wrong in your testing procedure.

Refer to Fig. 3b. We have redrawn the NAND logic symbol and labeled the inputs A and B and the output C. Fig. 3c shows a table called a Truth Table. Recall from class session one that TTL logic input pins go high as

soon as power and ground are connected. And also recall that a high is any voltage near +5 volts. A low is any voltage near ground. Line one of the Truth Table reflects this. If both the inputs are high, the output will be low. If either input goes low, or both the inputs go low, the output will go high. The remaining lines of the Truth Table indicate this and this Truth Table is for the NAND logic function. Note that for a two input gate, there are 22 or 4 combinations of inputs, so there are 4 lines in the Truth Table.

Now examine the Truth Table carefully. Notice that only one line in the Truth Table is different from the other lines. (The only Lo output is in the top line; all the other lines have Hi outputs.) Generally speaking, once you find the different line in a truth table, you have found the line that identifies the logic function.

Chip Testing

A vacuum tube tested in a tube tester doesn't always work in a TV set. Likewise, a chip tested in a chip testing circuit of some kind doesn't always work in a solid state circuit. The opposite, however, is always true: a chip proven bad in a chip tester will not work in a circuit.

What we are doing again is playing the odds. If a tester says the chip is good we can be reasonably certain that the chip will function in a circuit. The proof is in the pudding, so to speak: a chip which is tested in a functioning circuit is the best test that you can give that chip.

To illustrate this point, once you have the *squawker* of experiment #1 up and running (functioning), you have a nifty 7404 chip tester. And it is a much better and faster 7404 tester than the LED test that we used in experiment #1 to test the 7404. Not only is the circuit a 7404 tester, but it will test speakers, resistors, LEDs and capacitors as well! (There is, however, one slight flaw in

what I've just told you. Can you find the flaw? Hint: Three sections of the 7404 are inparallel in the booster section. What would happen if one of these sections had an open pin? Two parallel clock circuits made from each 3 pairs of inverters would make a simple and quick 7404 tester that would test all input and all output pins.)

The Set/Reset Flip-Flop

When a mechanical switch is closed, the contacts bounce several times before they finally remain closed. TTL logic inputs interpret this bouncing as several highs and lows on the input and respond accordingly. A circuit widely used to debounce a mechanical switch is shown in Fig. 4a. This circuit uses a normally open, normally closed pushbutton switch to produce the equivalent of two switch actions operated from one button. By cross-coupling two sections of a 7400 NAND gate we can debounce the mechanical switch (we get only one closure, one opening). The cross-coupled configuration in Fig. 4a is called a latch. In Fig. 4b two crosscoupled NAND gates are used to debounce two normally open, push-button switches. The remaining two NAND gates are connected as inverters, and this portion of the circuit shows two different ways to make an inverter out of 2-input NAND gate. Note: Any time you see a control or switch or an LED inside a rectangular box it means that the device is a front panel mounted control or switch or LED.

Here's how Fig. 4b works: Both switches are shown in the open position. Assume that pin 2 and pin 1 are both Hi. (Why is pin 1 Hi?) Pin 3 therefore is Lo (see the NAND truth table). Pin 3 goes into pin 4 of the bottom gate. If Pin 4 is Lo pin 6 is Hi. If Pin 3 is Lo, Pin 10 is Lo, and the LED is off. With Pin 10 Lo, pin 8 is Hi, Pins 12 and 13 are Hi, and Pin 11 is

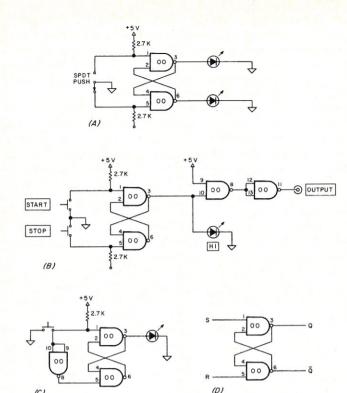


Fig. 4. Latch circuits for Experiment #5.

Lo and the output is a voltage near ground. Now press the start switch. Pin 1 goes Lo, forcing Pin 3 Hi, Pin 10 Hi, and the LED on. With 10 Hi. 8 is Lo, 12 and 13 are Lo, and Pin 11 goes Hi. The output is now a voltage near 5 volts. When Pin 3 went Hi, so did Pin 4. Now with a Hi on Pin 4 and 5, Pin 6 is Lo. Pin 6 Lo means Pin 2 is Lo and Pin 3 therefore is latched Hi. To make the circuit relatch back the way it started. you will have to press the Stop push-button switch. This will force Pin 6 Hi, Pin 3 will go Lo, and Pin 6 will be latched in the Hi position by the Lo placed on Pin 4 by Pin

The 2.7k resistors connected to the 5 volt supply in Fig. 4a, 4b and 4c are known as *pull-up* resistors. In digital circuits it is unwise to leave an input to a gate unconnected, or *floating*. If this is done, noise may cause a circuit to respond incorrectly. The pull-up resistors insure that the floating gate inputs assume a Hi, or logic 1 state. Thus, in Fig. 4a, the input not connected to ground by

the SPDT switch is forced Hi by current through the resistor. It will assume a low state only when the switch is thrown, connecting the input to ground.

Set up this circuit on the Superstrip and make it work. Be sure to leave your ground and power hooked up as before. If you have a single push-button with both normally closed and normally open contacts, then the circuit of Fig. 4a can also be set up and tested. If you don't have either switches yet, you can still do the experiment. The switches simply connect either Pin 1 or Pin 5 momentarily to ground. Two wires can be used to momentarily ground these pins and simulate the switches. This circuit allows us to generate one pulse at a time and we are going to incorporate it into our console as one of the permanent support circuits for working with the Superstrip. The LED Hi indicator is optional, but my own students need it to reassure themselves that the Start-Stop (SS) control on their console is functioning.




Fig. 5. Electronic color code.

Fig. 4c will not latch. It will debounce a switch and produce one pulse out for each button depression. It shows a way to use the 7400 to effect the same results as in Fig. 1a, but utilizing only a normally open push-button.

In the circuit of 4b Pin 1, the Start input, is called the Set input. Pin 3 is called the Q output. Pin 5 is the Reset input, and Pin 6 is called the "not Q" output. This is because when a circuit is Set. the Q output is the output that goes Hi. When a circuit is RESET, the Q output goes Lo. This cross-coupled configuration (latch) is also called a flip-flop. A flip-flop is a device which has two outputs, one of which is the opposite of the other. If one output is called Q, then the other output is Q. Since the cross-coupled 7400 NAND gates have two inputs (Set and Reset) and two outputs $(Q \text{ and } \overline{Q})$ we have what is called a Set/Reset flip-flop. These conventions are illustrated in Fig. 4d.

One final point: a handy way to identify IC sections is to write the last two digits of the IC inside the symbol. This is illustrated in Fig. 4. We will assume that the first two digits are 74 unless somebody tells us otherwise.

Experiment #6 The Electronic Color Code Purpose:

- 1. To learn to use the electronic color code.
- 2. To get some helpful pointers on how to remember the color code.

Equipment:

- 1. No new parts or equipment as such is needed.
- 2. We will need several resistors from your junk box to evaluate.

Symbols:

No new symbols will be introduced.


Circuit:

1. We will not be using a circuit as such.

Procedure

Refer to Fig. 5a. The colors used in the color code are those colors that are produced by white light which has been split up into its spectrum. The names given to each of these colors are: red, orange, yellow, green, blue, and indigo or violet. If you count these, there are only 6 different colors. So we add black and brown before the list and grev and white at the end to make the ten different colors that we need for the ten numerals of our number system.

Refer to Fig. 5b. Pick up any resistor from your junk box. Turn it around so that you are holding the resistor with the end with a color band facing the left. The bands of color should be

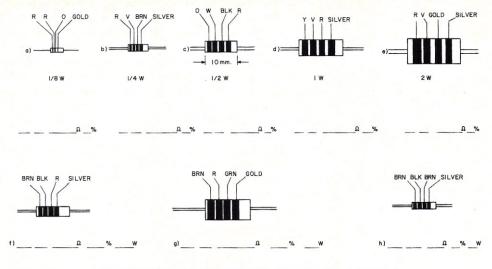

		COLOR	BANDS		VALUE	% TOLERANCE	LENGTH (mm.)	WATTAGE
	IST	2 ND	3 RD	4 TH	••••••		4	
i	BRN	RED	YEL	G			7	
j	GRY	RED	RED	S			10	
k	BRN	BLK	ORG	S			15	
1	GRN	BLU	RED	G			19	
m	RED	RED	RED	R			4	
n	GRY	RED	ORG	G			7	
0	BLU	RED	GOLD	0			15	
Р	BRN	GRN	RED	NONE	-		10	
q	GRN	BLK	GOLD	S			19	
r	YEL	VIO	GRN	S			7	
s	VIO	GRN	BLK	G			10	
+	BRN	RED	BRN	Y			10	

Fig. 6. Resistor wattage and quiz.

nearer one end of the resistor than the other end, but this may not always be true. If the resistor has a gold or a silver band, it will end up on the right, or at least toward the right-hand end of the resistor.

The leftmost color band is the first digit, the second color band is the second digit. The third color band is *not* a digit. It is called the multiplier. The simplest way to treat the multiplier is to consider it as the number of zeros that are to be added after the first two digits. Years ago, this statement was entirely valid, but when solid




Fig. 7. Console logic probe.

state devices appeared on the scene, we began to find resistors with gold and silver for the third color band, and a third color band of gold or silver cannot be treated as the number of zeros to be added. A gold third color band means that you divide the first two digits obtained from the first two color bands by 10 to get the resistance value. A silver third color band means that you divide by 100 to get the value of resistance. Dividing by 10 is the same as multiplying by 1/10 or .1 which means that you stick in one decimal place. Dividing by 100 means that you have two decimal places.

I will give you a sentence, cleaned up slightly for publication, that you can use to help remember the color sequence: "Bad Boys Race Our Young Girls But Violet Gives Willingly." Translated, it produces: Black, brown, red, orange, yellow, green, blue, violet, grey, white. And if you then go through the list of colors and assign

numerals to each color in sequence, you can come up with Fig. 5a from memory.

The fourth color band on resistors: The 4th color band gives the tolerance of the resistor. Gold means 5% tolerance, silver means 10% tolerance. and no fourth color band means 20% tolerance. It is very rare these days to find a resistor without a 4th color band. What you will find is a color band again used for the tolerance. Red designates 2%, orange 3%, yellow 4%, but gold is used for 5%. All 1% resistors could be marked with a brown color band, but usually the 1% is written on the resistor.

Power: The power a resistor will dissipate is measured in Watts and is generally directly related to the physical size of the resistor, and as a generalized rule of thumb, the bigger the physical size of the resistor, the more power it will dissipate.

About the only way I can

handle the wattage rating of resistors on a printed page is to draw some resistors to actual scale to indicate the wattage. Since I would also like to give you a quiz on this section, here is what we are going to do: Fig. 6a shows several resistors with color bands indicated and the wattage given. Fill in the blanks as you read the values of the resistors. We'll publish the answers in the next class session.

If this is your first try at reading resistances, then try this:

- 1. From memory, reproduce Fig. 5a and write it down on the test page.
- 2. Write down the first two digits.
- 3. Now add the number of zeros to obtain the value. (If I see anything after two digits but zeros, I'm going to get very upset! Black means: do not add any zeros after the first two digits. And there is no such thing as a 271 Ohm resistor read from the color code.)

Now electronics nuts are basically very lazy. They do not even like to write zeros if they can write a letter instead. So we can use some metric prefixes to eliminate zeros. Three zeros can be replaced by a k (k = kilo) and 6 zeros can be replaced with an M (M = mega). So 1000 Ohms can be written as 1k, and 1,000,000 Ohms can be written as 1M. Since kilo actually means X 1000, the k really replaces 3 decimal points. For example, 1200 Ohms can be written as 1.2k. and 2,200,000 Ohms can be written as 2.2M. We'll have to do some more work with the metric system and prefixes, but this will suffice for now.

Experiment #7 A Simple Logic Probe

Purpose:

- 1. To construct a simple logic probe on the breadboard.
- To verify its operation. Equipment:
- 1.7404

- 2. Two LEDs
- 3. A resistor between 1000 Ohms and 2400 Ohms.

Symbols:

1. No new symbols will be introduced.

Circuit: Refer to Fig. 7 for the circuit diagram for the simple probe that we will construct.

Procedure

Set up the circuit of Fig. 7 on your breadboard. The input resistor may range from 1000 Ohms to 2400 Ohms. Try what you have on hand and evaluate the performance. (Hey, you won't forget the power and ground connections on the 7404, will you?)

Theory

Repeating something that was stated earlier; the inputs of TTL logic chips go high as soon as you connect power and ground. If you have a voltmeter available, and you know how to use it, measure the voltage between Pin 1 and common on the 7404. If the meter is not available, then you'll have to trust me until such time as you are able to verify this. The input resistor from Pin 1 to common pulls the input of the first inverter Lo. This resistor must be small enough to accomplish this. A resistance value of 2400 Ohms (2.4k) is on the edge of doing this. Sometimes a 2.4k resistor will pull an input down, sometimes not, What we want here is the largest value of resistance that we can use that will be interpreted as a Lo by the 7404.




Fig. 8. Haywiring of console logic probe (bottom view of 7404 IC).




Fig. 9. Haywiring of Start-Stop control.

However, we do not want this value to be lower than about 1000 Ohms. A resistor of around 1500 Ohms or 1800 Ohms should do the trick. The author's console (breadboard) uses a 1500 Ohm resistor. When this resistor is correct, the Lo LED will be on.

The Lo on Pin 1 is inverted, appearing as a Hi on Pins 2 and 3. Pin 2 is connected to Pin 13, so 13 is also Hi. If 13 is Hi, 12 is Lo and so is 11. With 11 Lo, Pin 10 is Hi and the Lo LED is on. With Pin 3 Hi, Pin 4 is Lo and the Hi LED is off. Now, if we take the input Hi, Pin 2 will go Lo along with Pin 3, causing Pin 4 to go Hi, lighting the Hi LED. With Pin 2 Lo, 13 is Lo, 12 and 11 are Hi, and 10 is Lo and the Lo LED goes out. Once the probe is operational, connect the probe input (Pin 1) to Pins 5 and 6 on the 7404 chip. Pin 5 should indicate a Hi, Pin 6 a Lo.

Troubleshooting

It's a simple circuit, but things can go wrong. Always assume that the chip is good at the start. This is usually the way it will turn out. The first thing to check if it doesn't work is, of course, power and ground. Does the chip feel warm? It will if it is getting power. Are the LEDs correctly polarized? Remember that these are diodes, and if they are reverse biased by being connected into the circuit backwards, they will not light up. If one or both don't light, try turning them around in the circuit. You won't hurt anything. If they then light up, you had them in backwards.

If you still have an inoperative circuit, then we'll have to test the chip. Return to Experiment 3 and test out the LED first, then the 7404. If it doesn't play after the chip is proven, then you'll have to get some help.

Any member of the 7404 family may be used. The 74H04, the 74S04, the 74L04, and the 74SL04 will all work here, just as all would have functioned in the clock circuit of Experiment #1.

Experiment #8 Haywiring

Purpose:

- 1. To find out what hay-wiring is.
- 2. To get the logic probe and the start-stop control incorporated into the console.

Equipment:

- 1. All the parts used to construct the logic probe on the breadboard, and the start/stop control.
- 2. The 7400 IC, LEDs, 7400 IC and two SPST PB switches (single pole-single throw push button).
- 3. LED, optional for the start-stop control.
- 4. A resistor from 1.5 to 1.8k Ohms.

Symbols:

1. No new symbols will be introduced as such. However, we will reintroduce the pictorial drawing again, this time using an IC.

Procedure

Fig. 8 is a pictorial drawing of the haywired logic probe. The resistor is soldered directly to the pins of the IC. Wires are soldered directly to the pins of the IC. Leave all wires about 10 cm (4 inches) long. This procedure is called haywiring by hams. While not very pretty, it is an acceptable way of getting things done without the fuss of a printed circuit board. Note: The wire shown connecting Pins 2 and 3 to Pin 13 is positioned above the resistor lead and may not touch it. Once the circuit is wired, it is again tested on the breadboard before hanging it behind the panel. If the hay-wired circuit functions, then install it behind the panel. Install the LEDs in the Hi and Lo hole positions in the logic probe area and connect the wires from the chip to the designated destinations as diagramed on the pictorial.

Upon applying panel power, the Lo LED should be on. The Hi LED should be off. Connect a wire to the 4-40 X 1/2 inch bolt used for the logic probe input (see article on constructing student console). Touching this wire to +5 volts should turn off the Lo LED and turn on the Hi LED. If it doesn't work, then check your wiring. The purpose of having you test it before installing it was to prevent inoperation when it is placed behind the panel. If it worked out front, then it will work out back as soon as you eliminate the errors in wiring. The entire circuit hangs from the wires used to haywire it up, and it will function satisfactorily in this fashion. Later after we teach you how to make a PC (printed circuit) board, you can redo this to improve its looks. But for now it gets our console in operation, and that is the most important thing now. Besides, it's buried and you don't have to show anyone the underside of the console. Pin positions get reversed when reading ICs from the bottom.

Fig. 9 shows the haywiring circuit of the start-stop control. Follow the same procedure in haywiring the startstop control as you followed in wiring up the logic probe. Test the circuit before you hang it behind the front panel. Solder two wires on the push-button switches and plug them into the circuit so that all components of the circuits are tested and functioning before you place things behind the panel. Again the chip simply hangs on the wires for support.

The LED used for Hi indicator is optional. Pushing the start push-button makes the

MICROPROCESSOR

BOOKS



TRAINING

From Osborne & Associates, Inc.

FOR THE MICROCOMPUTER USER HERE ARE THE BOOKS THAT HAVE EDUCATED AN ENTIRE INDUSTRY:

AN INTRODUCTION TO MICROCOMPUTERS: VOLUME I — BASIC CONCEPTS

A highly acclaimed text discussing the fundamentals of microprocessors. This volume has been adopted by more than 300 colleges and universities as a basic text. Topics discussed include: fundamental concepts of computers, organization of the microcomputer, structure of a CPU. Serial and Parallel I/O,DMA Interrupts, and address modes. Approximately 300 pages. Order publication #2001. Price \$7.50.

8080 PROGRAMMING FOR LOGIC DESIGN or 6800 PROGRAMMING FOR LOGIC DESIGN

Written for the logic designer, these "how to" books discuss the detailed implementation of digital logic with the 8080 microprocessor and 6800 microprocessor, respectively. The design of a portion of a printer controller is used as an example in these texts. Approximately 300 pages each. Order publication #4001 (8080) and #5001 (6800). Price is \$7.50 each.

THE NEW EDITION OF VOLUME II

— SOME REAL PRODUCTS — IS READY

AN INTRODUCTION TO MICROCOMPUTERS: VOLUME II — SOME REAL PRODUCTS

This is a revision, introduced in May, 1977. It provides a comprehensive discussion of the function and specifications of more than 20 microprocessors, plus their supporting circuits. Logic for the 9440 to Nova standard busses is given. The Intel 8085 and 8048 have been added. The chapter on PACE has been considerably expanded. Many new support devices are covered. Our new edition also covers use of one microprocessor's support devices with another microprocessor - in particular, use of 8080 support devices with the 6800. Manufacturers' specifications are included for every part described. Approximately 1200 pages, up from 900 pages for the previous edition. Order publication #3001. Price \$15.00.

FOR THE PROGRAMMER WRITING PROGRAMS IN BASIC HERE IS A NEW SERIES OF BOOKS:

SOME COMMON BASIC PROGRAMS

A compendium of 76 useful programs written in BASIC.Programs for statistical, financial, and arithmetic analysis as well as other programs are included. Approximately 200 pages. Order publication #21002. Price \$7.50.

PAYROLL WITH COST ACCOUNTING — IN BASIC

A comprehensive payroll program with cost accounting. Source listings, operator instructions, file layouts and flow charts. It will run, as is, on a Wang 2200, WCS20 or WCS30. Other BASICs will require some file access statement changes only. Approximately 600 pages. Order publication #22002. Price \$12.50.

AND STILL TO COME IN 1977:

Accounts Payable

Accounts Receivable

General Ledger

Our business application programs are fifth and sixth rewrites of packages that used to sell commercially for \$3,000.00 per package, or more. These programs give you user-tested operator interaction during data entry and error recovery. These are programs written for the real world of operators who make mistakes — for users who find that nothing works correctly the first time. Our programs are tolerant of human error.

A COURSE ON DIGITAL LOGIC DESIGN USING MICROPROCESSORS

In order to be a successful microprocessor user you must be both a programmer and a logic designer. Skills in one area without the other will prevent you from making effective use of microprocessors in a digital logic environment.

This course is intended for engineers and programmers with either logic design or assembly language programming experience. Laboratory exercises conducted during the course require the student to construct interface circuits on our breadboard system, write application programs to drive the interface circuit, then edit, assemble and debug the program using our microcomputer development system.

Topics covered during the course include: How to design microcomputer systems; how to design memory systems; subroutines and interrupts — how and when to use them; DMA; Serial I/O; Parallel I/O; and assembly language programming. The functions of 8080 support circuits are discussed. The course is taught by design engineers who have experience designing systems incorporating microcomputers.

This is a 10-day course; the fee is \$600.00 for students attending at our facilities. Private courses are offered to companies wishing to train 20 or more people in their facilities.

Please include the Book Publication number when ordering books.

Write or call for a free brochure describing our lectures and books.



OSBORNE & ASSOCIATES, INC. P.O. Box 2036, Department D Berkeley, California 94702 (415) 548-2805 **06** output Hi. However, my students are reassured if they see this LED turn on when they push the start button, so we will make it optional for you as we did for them.

And before we proceed, I need to mention one other thing: soldering.

Soldering

It is not possible to teach you how to solder via a magazine. In teaching soldering, it is a do it yourself thing. You have to do it, and then have someone look at it and tell you what you did right and what you did wrong. The best that I can do is give you some pointers.

- 1. Everything must be clean. The tip of the iron, the parts to be joined, the solder, everything must be clean.
- 2. Use the best electronic solder that you can afford. 50/50 or 60/40 in something around 20 gauge is preferred. It must be resin core for electronic work, no acid core allowed.
- 3. The solder must flow. This means that enough heat must be transferred to the components that are to be joined so that the solder flows over their surface. About 1 second (or less) after the solder flows, remove the heat. Too much heat is as bad for the connection as insufficient heat. This is the hardest single thing for the beginner to learn. And, of course, using

the proper wattage (heat rating) iron for the job is very important (not over 47 Watts for ICs).

4. No movement allowed while the solder is turning back to a solid. This implies that some form of device be used to keep things from moving.

A good solder joint is bright and shiny upon completion of the connection. Any grey color to the solder means that something was done incorrectly.

Practice making soldering connections before you tackle the actual circuit. Take a piece of hook-up wire, strip the ends back, and twist the two ends together so that they don't unravel. Place any reasonably heavy device, such as the front edge of the console, over the wires to hold them stationary. Now solder the wires together. If you do the job correctly, a) the joint will be stronger than the wire itself, b) it will be bright and shiny with no trace of grey showing, the entire surface of the wire will be covered with solder, but the outline of the two twisted wires will still be easily visible. Now pull on the two wire ends until something gives. The wire should break before the two wires unravel. When you have this mastered, then proceed to solder up the circuits. You will only learn to solder by soldering.




Fig. 10. Seven Segment display diagrams.

Experiment #9
The Seven Segment Display
Purpose:

- 1. To introduce the 7 segment display.
- 2. To determine how to test 7 segment display.

Equipment:

1. 7 segment display

New Symbols

Refer to Fig. 10a. This figure shows a generalized 7 segment display as many authors draw them in their schematic diagrams. Fig. 10b identifies the seven segments and the decimal point. Fig. 10c shows a pictorial top view of the FND 70 display and identifies the pinouts. Please note that this is not an IC and the identification is not between the first and last pins as it is on integrated circuits.

Circuit

Refer to Fig. 10d. This diagram shows 8 LEDs inside the FND 70 package.

Procedure

Examine the FND 70 closely. Insert it in the Superstrip along one side of the strip only. The pin spacing is not wide enough to straddle the channel. The row of pins containing Pin 1 on the display should be the pins plugged in. The other 5 pins will drop into the channel between the plug in rows. Connect a resistor from Pin 1 (common) to ground. Do not omit this resistor or the readout will be ruined. This resistor may be any value between 47 and 220 Ohms. Start with Pin 2. Connect a wire to the plus rail from Pin 2. The decimal point (dp) LED inside the display should light. Connect Pin 3 to +. The c segment should light. Pin 4 to + should light b, Pin 5 to + should light a. To test the other segments, we will have to place a wire in the + rail on the other side and then reach under the FND 70 and touch each pin in turn to test the other segments. Pin 6 has no connection, Pin 7 is f, Pin 8 is g, Pin 9 is e and Pin

10 is d. Each segment should light up in turn as you connect each pin to the + rail. Pretty neat, huh? What good is it, though? Well, we've got 8 LEDs at our disposal instead of having to use discrete LEDs.

Preview

Hopefully, there will be fewer pages but more experiments in future sessions of KB Klassroom. We will teach you how to count in binary. We will teach you how to decode numbers in binary and binary coded decimal. We will learn how to change from the binary number system to the decimal number system. We will study the decade counter and the 7 segment decoder. We will learn how to build a device called an LED register. And we will construct the console clock circuit on the breadboard, but we still won't get it into the console until the 4th class session when we will learn how to make PC boards.

We are going to need some more ICs and more parts. For the next session we will need a 7448, an 8T90 (or a 7406 or 7416), a 7490, and a 555. And we will need handful of LEDs, at least 4 more. (Sierra Electronics package price to Kilobaud Klassroom students is \$4.)

And in the 4th session we will need, a) some copper clad circuit board, b) some etchant, some resist material, and the probe I keep telling you to make. Suntronix Company which published a catalog in *Kilobaud*, Issue 2, has a nifty kit for this purpose for \$14.95. This will satisfy our requirements very nicely. I have contacted them about a 10% discount for you and you've got it by mentioning Kilobaud Klassroom.

When you reach this point in the course, you can consider yourself as out of the beginner class in electronics. You'll never learn it all, but you now know a whale of a lot more than you did when you started and we've got a solid foundation laid.

JUMBO LED CAR CLOCK



Alarm Option - \$1.50 AC XFMR - \$1.50

THE HOTTEST SELLING KIT WE EVER PRODUCED!

You requested it! Our first D.C. operated clock kit. Professionally engineered from scratch. Not a makeshift kluge as sold by others. Features:

A. Bowmar Jumbo - 5 inch LED array.

B. MOSTEK - 50250 - Super Clock Chip.

On board precision crystal time base.

D. 12 or 24 Hr. Real Time Format.

E. Perfect for cars, boats, vans, etc.

F. P.C. Board and all parts (less case) included.

50,000 SATISFIED CLOCK KIT CUSTOMERS CANNOT

THIS MONTH'S SPECIALS

\$14.95 AMD - 8080A Z-80 CPU 49.95 82S129 1K PROM

60 HZ CRYSTAL TIME BASE S.D. SALES EXCLUSIVE!

\$5.95 ea.

2/\$10.00

1702A 2K EPROM

We tell it like it is. We could have said these were factory new, but here is the straight scoop. We bought a load of new computer gear that contained a quantity of 1702 A's in sockets. We carefully removed the parts, verified their quality, and are offering them on one heck of a deal. First come, first served. Satisfaction guaranteed!

U.V. Eraseable. NEW PRICE! \$2.95 ea.

(2.3 US access time)

UP YOUR COMPUTER! 21L02-1 1K LOW POWER 500 NS STATIC RAM Time is of the essence!

And so is power. Not only are our RAM's faster than a speeding bullet but they are now very low power. We are pleased to offer prime new 21L02—1 low power and super fast RAM's. Allows you to STRETCH your power supply farther and at the same time keep the wait light off. 8 for \$12.95

KIT FEATURES:

A. 60HZ output with accuracy comparable to a digital watch.

Directly interfaces with all MOS clock chips.

C. Super low power consumption MA tvp.)

D. Uses latest MOS 17 stage divider IC.

E. Eliminates forever the problem of AC line glitches.

Perfect for cars, boats, campers, or even for portable clocks at ham field days.

G. Small size; can be used in existing enclosures. Kit includes Crystal, Driver IC, PC board, plus all necessary parts and specs. At last count - over 20,000 sold!

1000 MFD

Filter Caps
Rated 35 WVDC
Upright style
with PC leads.
Most popular Most popular value for hobby-ists. Compare at up to \$1.19 ea. from franchise from franchise type electronic parts stores. S.D. Special 4/\$1.

Slide Switch Assortment

Our best seller. Includes mini-ature and stan-dard sizes; sin-gle and multi-position units, All new, first All new, first name brand. Try one package and you'll reorder more! Special 12/\$1.00



RESISTOR ASSORTMENT 1/4W 5% & 10% PC leads. A good mix of values. 200/\$2.

S.D. SALES EXCLUSIVE \$12.95 MOS 6 DIGIT UP—DOWN COUNTER \$12.95
40 PIN DIP. Everything you ever wanted in a counter chip. Features: Direct LED segment drive, single power supply (12 VDC TYPE.), six decades up/down, pre-loadable counter, separate pre-loadable compare register with compare output, BCD and seven segment outputs, internal scan oscillator, CMOS compatible, leading zero blanking. 1MHZ. count input frequency. Very limited quantity! WITH DATA SHEET

7400—19c 7411—29c 7451—19c 74LS00—49c 7413—50c 7453—19c 74LS02—19c 7416—69c 7473—39c 74LS02—49c 7420—19c 7474—35c 7404—19c 7432—34c 7475—69c 74S04—44c 7437—39c 7476—35c 74S04—44c 7438—39c 7476—35c 74LS04—49c 7438—39c 7480—49c 7488—19c 7488—59c 7480—19c 7448—85c 7485—95c 7410—19c 7448—85c 7486—45c TTL INTEGRATED CIRCUITS 7490-65c 74153-75c
74LS90-95c 74154-1.00
7492-75c 74157-75c
7493-69c 74161-95c
7495-75c 74164-1.10
7496-89c 74165-1.10
74121-38c 74174-95c
74122-1.70 74191-1.25
74138-1.95 74192-1.25
74141-75c 74193-1.00

PC IFAD

DIODES 1N4148/1N914 100/\$2.00 1N4002-1A. 100 PIV 40/\$1.

HEAVY DUTY Full Wave Bridge 25 AMP 50 PIV \$1.25

Disc Cap Assortment
PC leads. At least 10 different values. Includes .001, .01, .05, plus other standard where plus other dard values 60/\$1.00

74195-69c

\$9.95 KIT

P.C. Board - 3.00 AC XFMR - 1.50

Do not confuse with Non-Alarm kits sold by our competition! Eliminate the hassle avoid the 5314!

SIX DIGIT ALARM CLOCK KIT

We made a fantastic kit even better. Redesigned to take advantage of the latest advances in I.C. clock technology. Features: Litronix Dual 1/2' displays, Mostek 50250 super clock chip, single I.C. segment driver, SCR digit drivers. Greatly simplified construction. More reliable and easier to build. Kit includes all necessary parts (except case). P.C.B. or XFMR optional.

NEW! WITH JUMBO LED READOUTS!

Motorola SCR 2N4443. 8 AMP 400 PIV. P.C. Leads 3/\$1.

FAIRCHILD - TBA 641
4W. Audio power Amp. Just
out! In special heat sink
DIP. One super audio IC. \$1.50 with data

FND-359 -Led Readout
.4 IN. Common Cathode.
High effeciency. Has FND70 PIN OUT. 79c

OUR CATALOG is chocked full of rare parts bargains, deals, RAM or CPU kits, plus much more. Yours FREE!

PRICES SHOWN SUBJECT TO CHANGE WITHOUT NOTICE.

\$15.95

A very fortunate purchase. One of the best industrial quality REG-ULATED supplies we have seen. High performance, small size. Input is 120 VAC 60 HZ. Has the following regulated outputs: —5VDC@800MA; —15VDC @ 1.25 AMP; —25VDC @ 180 MA. Sold at a fraction of original cost. Do yourself a favor and order NOW. We expect a quick sellout.

COMPUTER POWER SUPPLY

AMD - 1702A Factory Prime Units. Brand New.

1.5 micro-seconds access time. \$4.95 each. HUGE FACTORY DIRECT PURCHASE!

Terms: Money back guarantee. No COD. Texas residents add 5% sales tax. Add 5% of order for postage & handling. Orders under \$10. add 75c. Foreign orders: US funds only!

Call your Bankamericard or Master Charge order in on our continental United States toll free Watts:

1-800-527-3460 Texas Residents Call Collect: 214/271-0022

Special Thanks to: Dennis, Fred, Abe, Bill, Sam, Hal, Tom, Alex, John, Ely, and Larry

S.D. SALES CO. P.O. BOX 28810 Dallas, Texas 75228 sa

Computerized Typesetting

... an introduction to word processing

Lee Wilkinson 2308 New Walland Hiway Maryville TN 37801 One of our biggest objectives in starting Kilobaud was to provide a media to the world of personal computers for good practical applications people have been developing. When Lee Wilkinson writes something for us you can bet it's going to be a very practical application. He's one of the few examples I've seen of a small businessman getting a computer system and really putting it to use as a tool in running his business. — John.

THIS IS ONE SAMPLE OF A 40 COLUMN LINE USING AN ALTAIR 8800 AND A KSR 33 TELETYPE TO 'SET' JUSTIFIED COPY. THE TYPE HAS BEEN REDUCED 20% WHICH IS OUR NORMAL REDUCTION OF THE BODY TYPE WE USE. A CARBON RIBBON WAS USED ON THE TELETYPE AND THE PAPER IS HAMMERMILL FOUR-BOND

WOULD YOU LIKE IT AGAIN? NO

OK

n our business of photography we have an occasional need for justified (even right-hand margins) type in order to make plates to run on our offset press. This need includes biographies for entertainers, descriptive information for models' portfolios, body type for church pictorial directories, and body type for our own advertising brochures.

The Problem and the Solution

Prior to writing this program in MITS 8K BASIC, our usual method of obtaining body type was with our office typewriter. There are no type houses in our area and the only other solution was to have a local printer set the type. The cost of the type set by a local printer is prohibitive for some of our low budget jobs. Printers in the area have charged, for typesetting alone, within a few dollars of what they would charge for a complete job. Our office typewriter was suitable but an attempt to justify several paragraphs of type was slow, timeconsuming and required typing each line at least twice. If we were lucky we ended up with almost all the lines even on the right-hand side of the page. With this program we can now type in our copy, observing a few rules for input, edit any mistakes we might have made while typing, and then get

justified copy on command with the KSR 33 Teletype.

Admittedly, the KSR 33 does not have the prettiest typeface and, of course, is limited to upper case letters, but the type is attractive enough for our limited need. We have found that the type looks very nice if you insert a sheet of quality paper and use a carbon ribbon. Carbon ribbons were not available locally for the Underwood and Underwood portable typewriters which use the same style spools as the KSR 33, but it was a simple matter to respool a carbon ribbon from another style of spool as long as the ribbon is ½ inch wide. Our method of respooling is to save a couple of the spools from used up cloth ribbons, then use a variable speed drill with a bit that fits loosely in the center of one of the TTY spools and wind on as much of the carbon ribbon as will fit comfortably on the TTY spool. A slight amount of tension on the ribbon will make a very neat winding. You will probably have some carbon ribbon left over for future use since it seems impossible to keep as much tension on the ribbon as the manufacturer when winding the original spool or the brand spool you may have to buy will often be larger than the TTY spool. When the spool is holding as much ribbon as you feel will stay on without spiraling off, cut the ribbon and fold a piece of masking tape over the end for connection to the sharp pin on the TTY spool. The carbon ribbon is a onetime use ribbon and you will have to watch as the ribbon approaches the end, since there are no eyelets for reversing, which you don't want anyway. You will use this ribbon only for your final justified copy, so it will last for quite a few paragraphs.

The paper we use for the justified copy is clay-based IBM paper made for their composing machines, but very good results are obtained

RUN

HOW MANY LINES? 48
IF YOU FINISH BEFORE TYPING 48 LINES, TYPE 'DONE'
LENGTH OF LINE? 40
IF YOUR LINE IS A SHORT LINE AT THE END OF THE PARAGRAPH
TYPE SPACES TO THE END.
(ENCLOSED IN QUOTES) LINE LENGTH OF 40 IS HERE . . .

? "THIE IS ONE SAMPLE OF A 40 COLUMB ← N LINE"
? "USING AN ALTAIR 8800 AND A KSR 33 TELE."
? "TYPE TO 'SET' JUSTIFIED COPY. THE TYPE"
? "HAS BEEN REDUCED 20% WHICH IS OUR NORMAL"
? "REDUCTION OF THE BODY TYPE WE USE. A"
? "CARBON RIBBON WAS USED ON THE TELETYPE"
? "AND THE PAPER IS HAMMERMILL FOUR-BOND"

? DONE

THIE IS ONE SAMPLE OF A 40 COLUMN LINE USING AN ALTAIR 8800 AND A KSR 33 TELE-TYPE TO 'SET' JUSTIFIED COPY. THE TYPE HAS BEEN REDUCED 20% WHICH IS OUR NORMAL REDUCTION OF THE BODY TYPE WE USE. A CARBON RIBBON WAS USED ON THE TELETYPE AND THE PAPER IS HAMMERMILL FOUR-BOND

IS THERE A LINE YOU WISH TO CHANGE? YES WHEN TYPING A NEW LINE, ENCLOSE IN QUOTES AND ADD A SPACE AT END WHICH LINE? 1

THIE IS ONE SAMPLE OF A 40 COLUMN LINE CORRECT LINE? YES TYPE YOUR NEW LINE

? "THIS IS ONE SAMPLE OF A 40 COLUMN LINE " IS THERE ANOTHER LINE? NO

PRESS SPACE BAR FOR JUSTIFIED COPY

THIS IS ONE SAMPLE OF A 40 COLUMN LINE USING AN ALTAIR 8800 AND A KSR 33 TELE-TYPE TO 'SET' JUSTIFIED COPY. THE TYPE HAS BEEN REDUCED 20% WHICH IS OUR NORMAL REDUCTION OF THE BODY TYPE WE USE. A CARBON RIBBON WAS USED ON THE TELETYPE AND THE PAPER IS HAMMERMILL FOUR-BOND

WOULD YOU LIKE IT AGAIN? YES PRESS SPACE BAR FOR JUSTIFIED COPY

Sample of program run.

Program listing (cont'd next page).

```
LIST
100 REM *** JUSTIFICATION *** BY LEE WILKINSON, WB6DKI/WA4QXC
110 CLEAR 4000
120 INPUT "HOW MANY LINES";N
130 PRINT "IF YOU FINISH BEFORE TYPING";N;"LINES, TYPE 'DONE' "
140 INPUT "LENGTH OF LINE";LL
145 PRINT "IF YOUR LINE IS A SHORT LINE AT THE END OF THE PARAGRAPH"
147 PRINT "TYPE SPACES TO THE END."
150 L=LL+2
160 DIM A$(N)
170 PRINT "(ENCLOSED IN QUOTES) LINE LENGTH OF";LL;"IS HERE ..."
180 PRINT TAB(L)"I'
190 FOR I=1 TO N
200 INPUT A$(I)
230 A$(I)=A$(I)+CHR$(32)
240 IF Q=7 THEN GOSUB 430:Q=0
250 NEXT I
255 GOTO 500
260 PRINT:PRINT
270 PRINT "PRESS SPACE BAR FOR JUSTIFIED COPY":WAIT 0,1,1
280 PRINT:PRINT
290 FOR J=1 TO N
300 K=0
310 A=LEN(A\$(J))
320 IF A < LL/1.3 THEN PRINT A$(J): GOTO 400
330 B = (LL + 1) - A
340 FOR I=1 TO A
350 T=T+1
360 IF T+K=LL+1 THEN T=0: GOTO 400 370 IF MID$(A$(J),I,1)="'' AND K \leq B THEN PRINT "'"; K=K+1
380 PRINT MID$(A$(J),I,1);
390 NEXT I
400 PRINT
410 NEXT J
411 PRINT:PRINT:PRINT
```

```
412 INPUT"WOULD YOU LIKE IT AGAIN": Z$
414 IF LEFT$(Z$,1)="Y" THEN GOTO 270
420 END
430 PRINT TAB(L)"I"
440 RETURN
500 PRINT:PRINT:PRINT
510 FOR I=1 TO N
520 PRINT A$(I)
530 NEXT I
535 PRINT:PRINT:PRINT
540 INPUT "IS THERE A LINE YOU WISH TO CHANGE";Z$
550 IF LEFT$(Z$,1)="Y" THEN 595
560 GOTO 260
595 PRINT"WHEN TYPING A NEW LINE, ENCLOSE IN QUOTES AND ADD A SPACE AT END"
600 INPUT "WHICH LINE";I
610 PRINT:PRINT A$(I)
620 INPUT "CORRECT LINE";Z$
630 IF LEFT$(Z$,1)="Y" THEN GOTO 650
640 GOTO 600
650 PRINT"TYPE YOUR NEW LINE"
652 PRINT
655 INPUT A$(I)
660 INPUT "IS THERE ANOTHER LINE":Z$
670 IF LEFT$(Z$,1)="Y" THEN GOTO 600
                                                             Program listing (cont'd).
680 GOTO 260
690 END
```

using 20 lb Hammermill four-bond. Most of our copy is reduced 20% before printing and this enhances the esthetic value of the type even more.

The Program

When you run the program it first asks "HOW MANY LINES?". If you do not know how many lines you will be typing, then answer with a greater number than you know there will be. A handy feature of this function is: If, for example, you want only 48 lines on an 81/2 x 11 page you will answer "48" and the computer will automatically end your input and put you in the edit mode when you finish typing the 48th line. You can, as the program instructs, type DONE and go into the edit mode after having typed any number of lines less then the number originally specified. Next comes the question "LENGTH OF LINE?" This feature enables you to set the length of the line you wish justified. It is especially handy for narrow paragraphs or columns. The computer then tells you that if a line is a short line, such as the last line of a paragraph, you must type spaces to the end of the line. The line length guide (an "I") is spaced to the length to which you should type your line (as close to as possible) but not over this length. Longer words should be

hyphenated in order to get close to the end of the line. The fewer spaces you leave at the line's end, the fewer spaces the computer has to compensate for. On the initial typing, your lines must be enclosed in quotation marks since commas are delimiters without being within the quotes. If you get to the end of a line and accidentally go past the "I" you can backspace using your "shift 0" and then hyphenate the word. Each seven lines the line length guide ("I") is typed out to help keep you in bounds of your line length. At first, starting and ending each line with quotation marks is a bit confusing but after a few lines you will get the feel of it. You cannot use quotation marks in your lines but we have found an apostrophe to be just as effective.

You may wish to change the number of string bytes at line 110 to better conform with your available memory. The WAIT instructions will need to be changed at line 270 if your terminal is addressed to a different I/O port. This WAIT statement allows you the time you need to switch ribbons and to insert a sheet of quality paper. The two PRINT statements at line 280 are included because after inserting a sheet of paper my TTY does not always line feed correctly for a line or two and this gives the TTY a

chance to "catch up." Lines 412 and 414 are included because there are occasions when a possibility of damaging the first copy can occur, especially when pasting up and cutting. Line 430 is the Line Length Indicator to keep you in bounds. As mentioned, it repeats

every seven lines and can be changed if you need it less often.

Conclusion

The program can be easily adapted to your specific needs if they are different from ours. An ideal adaptation would be to interface an IBM Selectric to the computer so that different type styles would be available as well as upper and lower case letters. An added convenience the Selectric interface would be a permanent carbon ribbon source without having to spool your own. In my limited inquiries of Selectric interfaces the least expensive modification kit runs between \$1000 and \$1500 plus the typewriter. This in itself puts it out of my price range. I would be interested in hearing from you regarding adaptations of this program or other systems interfaced to print justified copy.



"Gentlemen, and Gentleladies, I'd like to introduce you to our new model EX 3000 Vectored Priority Interrupt, Direct Memory Access, Multidimensional Arrays computer. Or, as it is known by those who work with it, the little GizzWhizz II."

S mA .05 A .08 A .08 A .08 A .15 mA .03 .25 .25 .25 .25 .25 .25 .25 .25 .25 .25	8-pin 14-pin 16-pin 18-pin 22-pin 24-pin 28-pin 40-pin Molex pi 2 Amp E 25 Amp 7473 7474 7475 7476 7480 7481 7483 7483	pcb pcb pcb pcb pcb pcb pcb pcb	6/BRIDGES .25 ww .25 ww .25 ww .25 ww .45 ww .35 ww .50 ww To-3 Socket: 100-prv 200-prv	1.20 1.95 T T 1.25 .85 2.75	2N2222 NPN 2N2907 PNP 2N3906 PNP 2N3054 NPN 2N3055 NPN T1P125 PNP LED Green, Red D.L.747 7 seg XAN72 7 seg FND 359 Red HP276 com-cat	1A 60v 1 15A 60v 2 Darlington 3, Clear 3 5/8" high com-anod 3 com-anode 7 seg com-cathode thode 7 4S133 74S140	.15 .15 .25 .10 .35 .50 .35
.15 .20 .20 .15 .25 .35 .55 .25	7474 7475 7476 7480 7481 7483	.35 .35 .30 .55	74176 74180 74181 74182	1.25 .85 2.75	74H72 .55 74H101 .75 74H103 .75	74S140	.75
.15 .20 .20 .15 .25 .35 .55 .25	7474 7475 7476 7480 7481 7483	.35 .35 .30 .55	74180 74181 74182	.85 2.75	74H101 .75 74H103 .75	74S140	.75
.25 .30 .45 1.10 .25 .40 .15 .30 .35 .35 .25 1.15 .55 .85 .45 .95 .95 .95 .25 .25 .25	7486 7489 7490 7491 7492 7493 7494 7495 7496 74100 74107 74121 74122 74123 74125 74126 74126 74151 74150 74151 74153 74154 74156 74161 74163 74166 74175	.95 .95 .30 1.35 .55 .95 .40 1.25 .60 .80 1.85 .35 .55 .45 .35 1.00 1.75 .95 .45 .95 .45 .35 .55 .45 .35 .75 .95 .45 .45 .45 .45 .45 .45 .45 .45 .45 .4	74190 74191 74192 74193 74194 74195 74196 74197 74198 74221 74367 75108A 75110 75491 75492 74H00 74H01 74H04 74H05 74H08 74H05 74H08 74H11 74H15 74H20 74H21 74H20 74H21 74H20 74H51 74H50 74H51 74H50 74H51 74H55	.95 1.75 .35 1.65 .85 1.25 .95 1.25 1.25 2.35 1.00 .85 .50 .50 .25 .25 .25 .35 .30 .25 .40 .25 .25 .25 .25 .25 .25 .25 .25 .25 .25	74L10 .35 74L20 .35 74L30 .45 74L47 1.95 74L51 .45 74L55 .65 74L72 .45 74L73 .40 74L74 .45 74L75 .55 74L93 .55 74L123 .55 74S00 .55 74S02 .55 74S03 .40 74S04 .35 74S05 .35 74S08 .35 74S10 .35 74S11 .35 74S20 .35 74S40 .25 74S50 .25 74S51 .45 74S64 .25 74S74 .40 74S112 .90	74S153 74S157 74S158 74S194 74S257(8123 74LS00 74LS01 74LS02 74LS05 74LS08 74LS08 74LS09 74LS10 74LS11 74LS20 74LS21 74LS22 74LS32 74LS32 74LS37 74LS40 74LS40 74LS40 74LS40 74LS40 74LS51 74LS51 74LS74 74LS66 74LS90 74LS93 74LS107 74LS93 74LS157 74LS153 74LS153 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157 74LS153 74LS157	.35 .80 .35 1.05
			LINEARS,	REGUL	.ATORS, etc.		
LM309H LM309K(LM310 LM311D(.65 340K-5).85 1.15 Mini) .75	LM LN LN 78 LN LN	1320K12 1320T12 1320T15 1339 05 (340T-5) 1340T-12 1340T-15	1.65 1.65 1.25 1.65 .95 .95 1.00 1.00	LM340T-24 LM340K-12 LM340K-15 LM340K-18 LM340K-24 LM373 LM380 LM709(8,14 PIN)	.95 LM747 2.95 LM1307 .95 LM1458) .25 LM3900 .45 LM75451 NE555 NE556	1.10 1.25 .95 .50 .65 .50
INT 7889 Clair Al	EGRAT emont Mess Il orders shi ben account Ca	a Blvd. pped prots invited scounts a alifornia F	San Diego epaid d vailable at OE Residents add	No mir COD o EM Quantit 6% Sales	111 (714) 278 nimum rders accepted ties Tax	NE565 NE566 NE567 SN72720 SN72820	.95 1.75 1.35 1.35 1.35
	.15 .10 .25 .30 .45 1.10 .25 .40 .15 .30 .35 .35 .25 1.15 .55 .85 .45 .80 .95 .95 .95 .25 .25 .25 .25 .25 .40 .45 .45 .45 .45 .45 .45 .45 .45 .45 .45	.15	.15	.15	.15	1.15	1.16

Kilobaud Sweepstakes Winners

Twenty people won life subscriptions to Kilobaud. If they were already subscribers they got double their original subscription money back. The winners were:

Sixth prize, a Southwest Technical Products 6800 kit with 8K of memory and a BASIC compiler was awarded to R.W.

S. Chenoweth of Bryan TX and S. North of Newfoundland

NJ won Seals 8K "never forget" memory boards with a

keep-alive circuit to protect the memory in case of a power

E. DeConingh, Temple City CA J. A. Weber, Berthoud CO

J. MacDonald, Virginia Beach VA A. Gutierrez, Hialeah FL

B. Hamerski, Winona MN R. Fisher, Spokane WA

Jeremy Nichols, Minneapolis MN

L. Tekheira, Chico CA

S. A. McCall, Decatur GA D. Digiacomo, Glendora NJ

Mikel of Fort Worth TX.

D. Digiacomo, Glendora NJ Jonathan Griffitts, Boulder CO G. Oldenburg, Rancho Paios Verdes CA

D. Willson, Omaha NB

L. Macknik, Lexington MA B. Fuller, Grand Prairie TX

T. Hughes, Ventura CA

E. Silterra, Urbana IL R. French, San Francisco CA

E. Frankenberry, Mt. Lebanon PA

Over \$7500 in prizes have been awarded to winners of the Kilobaud Sweepstakes. This contest was started before Kilobaud's first issue last January and continued until March 25th when D. Kim Simpson of Chicago IL won the Altair 8800b, completely assembled and ready to go. Troy Belo'te of Fayetteville AR won an Ohio Scientific CPU Expander for second prize. R. Friedman of Piscataway NJ won a set of 15 game programs for a 6800 by Technical Systems Consultants. Fourth prizes of Hobby Computers Are Here were awarded to the following individuals:

Travis Good, Hillsboro OR

J. Adams, Jerome ID

J. Dowdy, San Diego CA

J. Waldyke, Chelsea MI

R. Downs, Saraland AL Maj. J. Beard, APO NY

D. Uchitil, Franklin WI

M. Stock, Kansas City MO

R. Deliban, Palo Alto CA

G. Constantine, Poughkeepsie NY

E. Berlett, Melbourne FL

K. Saunders, Las Vegas NV

J. Williams, Oklahoma City OK

A. Voss, Grand Forks AFB ND

C. Myhre, Stacy MN

K. Goen, Oklahoma City OK

C. Shimbo, Detroit MI

C. Brinkley, Ft. Myers FL

D. O'Brien, Stockton CA

M. Smith, Milwaukie OR

H. Smith, Uncasville CT J. Wilson, Kenn. WA

M. Warren, North Wilkesboro NC

E. McWhiney, Redondo Beach CA

J. Newton, McDonald IN

J. Wells, Santa Ana CA

H. Flank, Wheaton MD

K. Brown, Sherman Oaks CA

M. Furguson, El Paso TX

R. Alleger, Mount Holly NJ

A. Sclawy, Brooklyn NY

C. Vaughn, Chelan WA

D. Torres, Fraser MI

N. Corison, Anaheim CA

B. Hill, Amherst TX

R. Pullen, Fountain Valley CA

A. Hoke, Brooklyn NY

S. Scharf, Hackensack NJ

S. Wolf, Bronx NY

G. Gresfeld, Olney MD S. Devlin, Warren NJ

M. Goldstein, Tempe AZ

W. Leopold, Troy MI

J. Langdon, Austin TX

H. Havlik, River Forest IL

S. Judd, APO NY

R. Jones, Washington DC

J. Gehrke, Fredericksburg VA

M. Zarembski, Scarsdale NY

J. Anglin, Rochester MN D. Hartman, Mission Viejo CA

N. Weber, Burnside LA

J. Smirl, Kansas City MO

R. Moell, Raleigh NC

J. Culvahouse, Lawrence KS

W. Peters, Beaumont TX

C. Harris, Potomac MD

C. Cowan, Jr., Louisville KY

R. Rasor, San Antonio TX

L. Shoemaker, St. Petersburg FL

T. Foster, N. Hollywood CA

W. Stewart, Atlanta GA

C. Benward, Citrus Heights CA

G. Darwin, Louisville KY

K. Klages, Orlando FL

H. Hankins, Jr., APO NY

Major R. T. Flora, APO SF CA

L. Stevick, FPO Seattle WA

R. Kobayakawa, Honolulu HI

G. Yama, Mesa AZ

J. C. Weaver, Midland TX

John Alston, Virginia Beach VA

A. Larsen, Los Altos CA

J. Keesling, Woodland Hills CA

M. King, Ridgecrest CA

L. Pironka, Pullman WA

F. Simoneau, Los Gatos CA

R. Colantonj, Los Angeles CA

D. Booth, Portland OR

D. Metal, Commack NY

E. Monahan, Lisle IL

A. Kranok, Jr., Mission Viejo CA

D. V. Gassie, Lajolla CA

G. Pennini, Birmingham AL D. Burke, Bremerton WA

B. Adler, Brooklyn NY

D. Parker, Davis CA E. Lovick, Jr., Northridge CA

J. O'Leary, Redondo Beach CA

DeCoffey, Sheffied Lake OH

F. N. Henderson, Santa Maria CA

J. Celko, Atlanta GA

D. Coleman, Norridgewock ME

G. Cosimini, St. Paul MN

J. Wilkendorf, Ft. Worth TX

J. Chinn, College Place WA

G. Crockett, Riverside CA A. Griffin, APO San Francisco CA

M. Johnson, Kettering OH

D. Moody, W. Covina CA

F. Lowe, Riverside CA

T. Rodeheffer, Pittsburgh PA B. Cronenberger, Buffalo NY

J. Hegseth, Spanaway WA

H. Stuck, Chapel Hill NC

W. Tanoue, Hilo HI

M. Yamada, Chicago IL

M. Terrell, Middletown OH

R. Wier, College Station TX W. Farrey, FPO NY

C. Green, San Francisco CA

D. Weber, Eureka CA

R. Formeister, Phoenix AZ

Frank Tinius, Vandenberg AFB CA

J. Muir, Livermore CA

G. Twait, Cylinder IA

J. Salmon, Fenton MO

J. Tyler, Troy MI

S. Mikkelsen, Glendora CA

A. Helpinstine, Anoka MN

J. Wood, San Jose CA D. Stoenner, Tustin CA

L. Burbey, Green Bay WI

R. Schaeneman, Stockton CA

D. McGuire, Longmont CO

T. Speer, Syracuse NY

J. Merritt, Torrance CA J. Hood, New Haven CT

K. M. Barbier, Socorro NM

E. Wilczak, Howell MI

D. Hallberg, Molino IL

Q. Jensen, Brigham City UT M. Ito, Casper WY

W. Nichparenko, Santa Cruz CA

C. McCain, Syracuse NY

J. Morris, Dedham MA

P. Rekieta, Houston TX J. Dumas III, Oxford MI

P. Burke, Red Bank TN

J. Trachtman, St. Louis MO G. Edmundson, Elizabeth PA

K. Stauffer, Madison Hts MI

F. Stukey, Goshen NY G. Beecher, Duncombe IA

V. Johnson, Storm Lake IA

P. Crossman, Colorado Springs CO W. Holmgren, Colorado Springs CO

W. Berberich, Republic MO

L. Beleos, Reno NV R. Peck, Buffalo NY

M. Hollenbeck, Binghamton NY

S. Mitchell, Grand Rapids MI

W. Wojkowski, Batavia NY

D. Boddiford, Atlanta GA H. Herman, Greensboro NC

J. D. Smith, Middle Island NY

F. Knapp, N. Highlands CA R. Hale, Rancho Santa Fe CA

C. Carlson, N. Las Vegas NV

J. Bowman, Phoenix AZ R. Johnston, Woodstock NY

M. Spurgat, Houston TX

P. McHarque, Sacramento CA

Psycholinguistic Research, Menlo Park CA D. Repsher, Bakersfield CA

M. Fenton, Los Angeles

M. Williams, Northridge CA

R. Marshall, Lemon Grove CA

K. Kiser, Pullman WA B. Freeland, Olympia WA

L. Dossett, San Diego CA

E. Walsh, Santa Maria CA B. McLendon, Sacramento CA

J. Mealing, Jr., El Paso TX

M. Sweet, Austin TX K. Newcomer, Corvallis OR

F. Yates, Saratoga CA

R. Lopez, Santa Barbara CA J. Fotts, 1000 Oaks CA

C. Pearce, Berwyn IL P. Hutchison, Ames IA

W. Spear, Tulsa OK

K. Jackson, Livonia MI J. Wise, Houston TX

P. Roberts, Richmond CA

R. Browning, Kenmore NY D. Hatton, Angwin CA

J. Edelman, Baton Rouge LA R. Taylor, Des Moines IA

N. Crawford, Plano TX A. Amaro, Fremont CA

E. Gardner, Troy NY

W. Kirsch, III, Annandale VA R. Hoolko, Canoga Park CA

B. Bong, Cedar Rapids IA


R. Romero, APO NY D. Norlander, Sunnyside CA

C. Hill, Ft. Wayne IN

T. Lennon, Albany NY

S. Mitteldorf, Belle Harbor NY

INPUT/OUTPUT TERMINAL



A great place to start for building a microprocessor. These units were part of a comlex computer system. The terminal contains: keyboard; CRT; drive circuits; ASC11 output; and a complete 128 page technical manual with operating and repair instructions, which makes it easy to modify the terminal for your applications. (Character generator was part of a separate control section which is not supplied. The terminal can be used when modified using character generator LSI chips, such as the 2513, 2516 or other such IC's).

The keyboard is a 50 key alpha-numer-(and others) block keyboard, with ASC11 output. Display capactly is 768 (12 lines of 64), 384, 256, 128 and so on, depending on character size desired The character size may be adjusted from approximately typewriter size up to 1/4"

The viewing screen of the CRT utilizes a high contrast, low persistence, emerald green phosphor. Each character is composed from a 5 x 7 dot pattern, registering clearly and sharply against a dark background. Controls provided include: on/off; brightness; focus; and character height.

Great as a microprocessor input & output device. The display stations are used, removed from airline reservation systems, hotel reservation systems, stock exchanges, etc. Sh. Wt. 35 Lbs. exchanges, etc.

NEVER BEFORE at this LOW PRICE!



A real old-fashioned type like the kind at the local drug store back in the 1950's, except that these are brand new parts. Through a lucky purchase we have obtained some new parts of a drink mixer. It is complete but for the top cover, but you can make your own or operate without it. Evidently the manufacturer sold this line out to another and the tops got lost. Now you can build up a \$20.00 mixer for under \$5.00. Kids love 'em, order one today! Kit includes motor, mixer, screws, stand, line cord, switch, and 16 oz mixer cup. Sh. Wt. 5 Lbs. 7M370053 .\$4.88

ALSO: Spare Mixer Cup for above, Sh. Wt. 8 oz. . . 7M370054 . . \$0.80 ea.

LOGIC AND OP AMP POWER SUPPLY



This regulated power supply has outputs of ±15 volts at 0.25 amps and +5 volts at 2.5 amps, with an input of 115 Manufactured by a computer company as part of a phone data termi-Three (3) 723's (IC's) are used for voltage regulation. Units have barrier strip outputs, and are open sime. Size: 5" x 9" x 2". New surplus. Oty. Ltd. Sh. Wt. 5 Lbs . . . 6MI60215 . . . \$17.50 6MI60215 \$45.00/3

COLOR T.V. CHASSIS



We have found some 2,000 TV chassis' that got damaged in a train derailment. These are the very same types of chassis we have been selling: the TS-951 and the TS-953. We have sold over 2,000 of the perfect chassis and now we have a quantity that do not measure up to our high standards. They have cracked P.C. boards bent frames, etc., but they are worth 3 times as much for the fantastic parts.

13" and 15" chassis' include tuners and controls. All chassis' sold "AS IS", all sales are final, no returns please.

13" Chassis . . 7DZ70059 . . .\$22.50 ea. Sh. Wt. 12 Lbs. ea. 10 for \$198.00 15" Chassis . . 7DZ70060 . . .\$22.50 ea. Sh. Wt. 12 Lbs. ea. 10 for \$198.00 10 for \$198.00 17" Chassis . . . 7DZ70061 . \$14.88 10 for \$128.88 Sh. Wt. 10 Lbs. ea. 19" Chassis ... 7DZ70061 . . . \$14.88 Sh. Wt. 10 Lbs. ea. 10 for \$128.50



New surplus lenses made by Cosmicar for Mati. It's a super lens with fully automatic diaphram which opens by an electric eye control. These lenses maintain image luminance of 1001X against subject brightness EV from 11 to 17 (1500, 960001X) f/1.4, focal length = 25mm., fully automatic diaphram, acceptance angle = 30°, EE response time is less than 4 seconds. "C" lens mount. List price was \$300.00. Sh. Wt. 4 oz. 7VL70044. . . SPECIAL! . . . \$150.00

REGULATED 10 to 24 Volt DC 2 Amp POWER SUPPLY KIT



Here's an easy to build kit, designed to give maximum RF output to your CB. Can be built to deliver 13.8 volts DC regulated (2A) for mobile CB's, or switched over to give 10 to 24 volts DC (2A) regulated, to be used as a lab bench sup-Kit includes all parts and instructions to put together this versatile power supply, case not included.

Includes printed Sh. Wt. 10 Lbs. . . 6C60498 Includes printed circuit board. 6C60498 . \$14.88 \$39.98/3

0 to 24 VDC, 5 Amp POWER SUPPLY KIT



This power supply or battery charger kit should be useful to have around the house or shop. Easy to build, complete kit includes a 0 to 40 volt autotransformer (Variacr), 24 volt 5 amp trans former, bridge rectifier, filter cap., and everything else you need to build this hefty power supply (case not supplied). Complete with instructions.

Sh. Wt. 12 Lbs. . . 6C60462 . . 3 for \$38.88. 6C60462. \$38.88/3

POSTAGE: Please add sufficient funds for postage and insurance. Shipping weight for merchandise is listed at the end of each product description shipping is from Peabody, Ma. 01960.

Mass. Residents Add 5% Sales Tax.

SEND FOR OUR FREE CATALOG!

Or, receive our catalog in an order and insure yourself of a place on our mailing list

MODERN STANDARD TELEPHONES

factory rebuilt, modern tel-A complete, ephone ready for instant use. Available in black, white, beige, pink, red, green and blue. Ideal as an extra phone, for use on intercoms, private systems, extensions, Easy 2-wire hook-up. Phones include hand set, induction coil, and cable, but no ringers. Many types and styles to choose from. When specifying a color, please give 3 choices in order of prefer-Spec sheets with wiring diagrams are included, not detectable. Phones may vary slightly from photo. Sh. Wt. 8 Lbs. (Call Director 10 line phone = 15 Lbs.)

Standard Desk Dial Phone

Black, Desk Dial . . 6VL60440 . . \$12.50 Color, Desk Dial . . 6VL60441 . . \$17.50 Standard Wall Dial Phone

Black, Wall Dial. . . 6VL60442. . . \$12.50 Color, Wall Dial. . . 6VL60443. . . \$17.50 2 Line Standard Desk Dial Phone

This phone has a twist key to switch in 2 lines over the same phone, plus a hold position. Available only in black. Black, 2-Line .

SPECTRA STRIP RIBBON CABLE



You all know how valuable this stuff is . and now it's available at a fraction of list price. Several types available, order by or "ST" number, number of feet desired

SS-1018: 10 conductor, 18 gauge. Prices: 3 ft./\$1.00; 18 ft./\$5.00; 40 ft./\$10.00; 100 ft./\$20.00.

SS-0822: 8 conductor, 22 gauge. Prices: 4 ft./\$1.00; 20 ft./\$5.00; 50 ft./\$10.00; 100 ft./\$17.00.

SS-1022: 10 conductor, 22 gauge. Prices: 6 ft./\$1.00; 35 ft./\$5.00; 80 ft./\$10.00; 100 ft./\$12.00; 200 ft./\$22.00.

SS-1822-19BD-090: 18 conductors, 22 gauge, 19 strands, .090 thk. ground plane. 1 ft./\$1.00; 6 ft./\$5.00; /\$10.00; 50 ft./\$25.00; 100 ft./\$40.00.

SPECTRA TWIST RIBBON CABLE



strands per conductor. Prices: 3 ft./\$1.25; 15 ft./\$5.00; 35 ft./\$10.00; 100 ft./ /\$25.00; 500 ft./\$100.00; 1,000 ft./

3CT-5028-7B-05-125: Flat ribbon twist cable, used in place of shielded cable, reduces or eliminates cross-talk, 50 conductor, 28 gauge, 7 strands per cond.
Prices: 1 ft./\$1.25; 10 ft./\$9.00; 50 ft./

/\$40.00; 100 ft./\$69.00; 500 ft./\$300.00.



1 or 2 players - Variable ball speed - dual paddle size - sound. These are questionable games returned to mfr. for one reason or another. He is too busy to repair, and needs mfg. room. His loss, your gain. Complete with schematic. Contains 20 - 74LS series chips, other chips, power supply & other stuff. 115VAC operation. Designed by MIT.

Sh. Wt. 4 Lbs. . . 7ZU70161 . . . \$10.00 4 for \$38.88 . . 7ZU70160 _ . \$38.88 for 4

PHONE ORDERS WELCOME! Bank Americard, Master Charge and

American Express Accepted. Phone: (617) 531-5774 / 532-2323 \$10.00 Minimum on Charge Orders

B&F ENTERPRISES 119 FOSTER STREET PEABODY, MASS. 01960 (617) 531-5774 / 532-2323

CARD CAGE WITH GUIDES AND CONNECTORS



This cage has 37 PC board edge connectors for 1/16" thick cards. Connectors are wire wrap type with double edge contacts, 0.125" spacing. The card rack has 18 rows of 2 types of connectors: 30 contact and 85 contact types. Over-all dimensions: 18"L x 11"W x 10"H. Removed from used equipment, this was once part of a data display terminal.

Sh. Wt. 13 Lbs....5U00210....\$9.50 3 for\$25.00...5U00210...\$25.00/3

MICROPROCESSOR MAIN FRAME

Through a lucky purchase we have obtained a quantity of the main frames from the Viatron System 21 Computer. These contain the 5U00210 card cage mentioned above, plus five UG-90 connectors, male and female power supply connectors, display terminal base, etc. Looks ideal for building a microprocessor in. Possibilities unlimited!

Sh. Wt. 25 Lbs. . 6BAE60129 . .\$19.50 3 for \$49.50 . . . 6BAE60129 . . .\$49.50

TRANSFORMERS

We have over a million transformers in stock! The list below includes some of our most popular transformers for use in power supplies. This is only part of our vast selection. All primaries are 115 VAC. Sh. Wt. Order No. Volts Amps Price

6	5H00013	18	5	
		17	5	\$8.50 ea
	III.	10	8	
10	4EX245	24	5	\$4.00 ea
10	X045 *	27(ct)	5	\$7.00 ea
10	6H60528	15	15	\$8.00 ea
15	6H60529	24(ct)	5	
		24 or		
*Forro	Doconont to	ma 22	2	\$10 00 as

TOUCH-TONE GENERATOR CHIP MF 8900



New surplus tone generator chip: this one chip will generate dual frequency tones for a 2 in 8 code as used in all touch-tone phones. This chip can be interfaced into any telephone system. Operating voltage of 4.5 to 35 volts; no crystal required for freq. gen.: exceeds CCITT reommendations; data transmission capability. Chip is shipped complete with IC socket, a four page data sheet and a data package

CHARACTER GENERATORS MOS - ROM

The Mostek 6095 character generator Features: 64 dot matrix (5x7) characters with column by column output; High speed character access time and column select access time; Completely static operation, no clocks required.

Applications: CRT alpha-numeric display; LED array driver; billboard and stock market displays.

Each ROM contains 2,240 bits of programmable storage, organized as 64 characters, each having 5 columns of 7 bits. Complete data sheet included. Sh. Wt. 8 oz 7IC70020 \$10.00

(Specify Mostek 6095 ROM & order no.)

FUNCTION GENERATOR CHIP INTEL 8038

New surplus from a local manufacturer who needed cash fast. You save! Sh. Wt. 8 oz.7IC70167\$4.75 3 for \$12.75 . . . 7IC70167 . . . \$12.75/3 (Specify Intel 8038 with part number.)



GLOSSARY

Tim Barry

ADDRESS: Addresses are used to identify individual locations within the computer's memory. Every time the computer needs to transfer data to or from a memory location it sends the address to the memory. The memory system then decodes the address and performs the data transfer with the selected location.

BENCHMARK: Benchmark programs are used to compare the performance of computer or language processors. The normal procedure for computer benchmarking is to define a set of problems representative of the proposed application and implement them in the test computer's assembly language. Program execution times can then be compared and the most effective processor selected. For language processor benchmarks, the procedure is again to define test problems, this time implementing them in the various versions of the same language and testing for the best execution times.

Benchmarking is very easy to describe and very difficult to do in a meaningful way. Almost any company can devise benchmark which "prove" their computer and/or language processors are best. The program and its interaction with the computer is a complex operation, and to be meaningful any attempt at benchmarking must test a wide variety of applications programs and take into account the variations in the overall systems being compared.

BUFFER: 1. A buffer is a memory area used to store data for use at a later time. Buffers are often used to store I/O data prior to or after processing. For example, a BASIC interpreter will usually accept user input characters into a line buffer. Then, after the last character of the line is entered, the characters in the buffer are processed and the command executed. 2. An electronic buffer is a gate/driver IC, or discrete circuit, used to isolate one section of a system from another. Buffers help reduce device loading and improve the noise tolerance of the system. Normally (in good design practices) all devices which communicate via a common bus have all signals buffered.

BYTE: A byte is an eight-bit data element. Many computers use the byte as the basic size element of their memory. In this case the computer's instruction set will be composed of instructions which are stored in one or more single byte memory locations. The Intel 8080, for example, executes instructions which are 1, 2 or 3 bytes long.

DATA BASE: A data base is the collection of all data used and produced by a computer program. In large systems, data base analysis is usually concerned with large quantities of data stored in disk and tape files. Smaller hobbyist systems are more frequently concerned with data base allocations of available memory locations between program and data storage areas.

DISCRETE: 1. A discrete circuit is built up from individual circuit components (transistors, resistors, capacitors, etc.). This usage is common when the user wishes to make clear that a circuit was constructed without integrated circuits, e.g., a discrete amplifier. 2. Events occurring at distinct and separate instants in timing. The pulses were detected at discrete intervals.

EFFECTIVE ADDRESS: The effective address is the address of the memory location which is actually used in a program operation. For example, in an indexed address operation the effective address is formed by adding the displacement included with the instruction to the base address held in an index register.

KILOBYTE: 1. A kilobyte is 2^{10} x 10^{24} bytes. It is commonly abbreviated to "K" and used as a suffix when describing memory size. 32K really means a $32 * 10^{24} = 32,768$ byte memory system. 2. Shortest lived computer magazine title on record.

LOCATION: A location is a single storage address, or position, in a computer memory.

MODULO: Modulo is a mathematics term which means the same as *base*. It is normally used when referring to counters or adders. For example, a modulo 10 counter would go through 10 distinct states before returning to its initial state. A number evaluated modulo N (N is called the *modulus*) gives the integer remainder of the division of that number by the modulus. Thus 300 evaluated modulo 256 equals the remainder of 300/256 = 44.

NIBBLE: A nibble is one half of a byte, namely a four-bit data element.

PHI-DECK (Trademark): The Phi-Deck is a computer-controlled magnetic tape transport manufactured by Triple I, a division of the Economy Company, Oklahoma City, Oklahoma.

SEED: A seed is a constant used to initiate a pseudo-random number generator. The seed is used to generate the first number, and all subsequent numbers are based on previous results. If you start the sequence with the same seed, you will, of course, get the same "random" number sequence. To avoid this, a good way to generate a reasonably random seed is to sum up a block of memory which is known to be used for variable program data. This sum can then be used to seed the random number generator.

VOLATILE: A volatile memory is one which loses its content when power is removed. All currently available semiconductor memories are volatile. Special external circuitry must be added to maintain data in the event of power interruption.

A COMPUTER IS NOT A TOASTER

I bought a toaster through the mail at 5% discount. It works great. Elements have blown and I fixed 'em with neither calls to the suppliers nor a logic probe.

Computers are different

- 1. You want to see systems up and running, and ensure that yours will do the same.
- 2. You want specialists who will help you choose from a large variety of components so that you get a system that satisfies your needs.
- 3. You want to drop in or call us and immediately understand why its worthwhile to deal with us from the beginning before you get

COMPUTER MART OF NEW JERSEY, INC.

501 Route # 27 Iselin, N.J. 08830 (201) 283-0600

Store Hours: Tues. thru Sat. 10 am-6 pm Tues. and Thurs. 'til 9 pm



MICROCOMPUTER PEOPLE

MICROCOMPUTER **PROGRAMMING** COURSE

FREE description and outline of MODU-LEARNTM Home Study Course in Microcomputer Programming. Hundreds of pages of text with examples, problems and solutions. Prepared by professional design engineers using systematic software design techniques, structured program design, and practical examples from real microcomputer applications. Presented in a modular sequence of ten lessons oriented for the engineer, technician or hobbyist beginning to need programming skills. Includes background material on microcomputer architecture, hardware/sofware tradeoffs, and useful reference tables. Much of this information has has been available only through costly seminars. Now you can study this complete course at home at your own pace for only \$49.95. Send for FREE descriptive brochure now.

SERVICES INCORPORATED

711 Stierlin Road, Mountain View, CA 94034 (415) 965-8365

30

180

B14

NCE Spring Catalog of Super Bargains!



Many Items Like:

Numeric Printers Micro® Key Switches Burroughs Alpha-Numeric Displays **DC Power Supplies** Mini-Micro Computers Peripherals and MORE!!

Name		
Company		
Address		
City	State	Zip
		Main St. Dept. 48
COMPLITED	Ann Arh	or Mich 48104

EXCHANGE Phone: 313/994-3200

N-7

LONG ISLA **COMPUTER STORE** LOOKS LIKE MICROCOMPUTERS PERIPHERALS

ACCESSORIES

C30

IMSAI 8080 BYTE-8 SWTP MP68 CROMEMCO

PROCESSOR TECH

MEMORY EXPANSION COLOR TV GRAPHICS LEAR SIEGLER ADM 3 PAPER TAPE READER

INTERFACES (KITS or ASSEMBLED UNITS)

PROGRAMS AND SOFTWARE

VARIOUS BASICS - TINY, 4K, 8K and 12K. FOCAL - DOS - GAMES - BUSINESS APPLICATIONS.

ALSO AVAILABLE ... APPLE 1 CASSETTES **FLOPPIES** MODEMS **TERMINALS** DEC. WRITERS

BUSINESS APPLICATION INQUIRES INVITED SYSTEM DEMONSTRATIONS AND LITERATURE / MAGAZINES.



Byte Shop East, Inc. 27-21 Hempstead Turnpike Levittown, Long Island (516) 731-8116

Two blocks east of Wantagh Pkwy. HOURS: TUES. thru FRIDAY 12 - 9 10-5 SATURDAY

You supply computer and software - Dealer inquiries invited -

WRITE TODAY

COMPUTER

ONTROL

Sylvanhills Cahoratory.

#1 Sylvanway, Box 239 417-736-2664


11 x 17 inch size (Delivery stock)

17 x 22 inch size (Delivery 3-8 weeks)

- We supply plotter and interface -

Owner's Manual (refunded with plotter purchase)___

Strafford, Mo. 65757

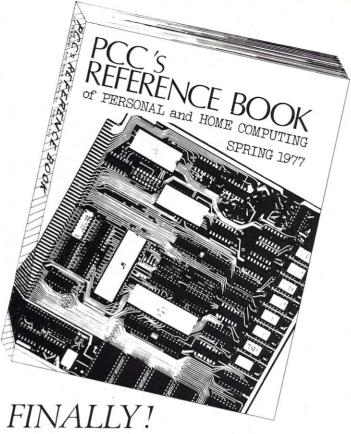

A REFERENCE BOOK

for Home Computer Users!

Ever try to find the addresses of some manufacturers of, say, tape cassette or floppy disc interfaces for micros? Frustrating, isn't it? We know, because we've been frustrated by it too, so we decided to do something about it. *PCC's Reference Book* includes:


- Hundreds of companies and stores selling hardware, software, peripherals and offering all sorts of services are listed with their brand names and addresses.
- Nuts-and-bolts and survey articles on software, hardware, kits, applications, and the future, for the experienced and the not-so-experienced user of micros.
- An index of the articles from the major hobbyist magazines plus information on magazines in the field.
- Bibliographies on different areas so you can investigate them further. Book reviews too.

You'll wonder how you ever got by without it. *PCC's* Reference Book will be available in May.

Please send me PCC's Reference Book. My \$4.95 is enclosed.
(In California add 29 cents for sales tax). Full refund given if
not completely satisfied within 10 days.
NAME

Send to: Dept.K, 1263 El Camino, Box E, Menlo Pk. CA94025

The Tarbell Cassette Interface



- Plugs directly into your IMSAI or ALTAIR*
 Computer
- Fastest transfer rate: 187 (standard) to 1000 bytes/second
- Extremely Reliable Phase encoded (self-clocking)
- 4 Extra Status Lines, 4 Extra Control Lines
- 37-page manual included
- Device Code Selectable by DIP-switch
- Capable of Generating Kansas City tapes also
- No modification required on audio cassette recorder
- Complete kit \$120, Assembled \$175, Manual \$4

*ALTAIR is a trademark/tradename of MITS, Inc.

TARBELL ELECTRONICS

20620 S. Leapwood Avenue, Suite P, Carson, California 90746 (213) 538-4251

California residents please add 6% sales tax

T11



CRT TerminalsAssemblies

PeripheralsComponents

Tape Drives \$800.00

Keyboards \$40.00 to \$60.00 (ASCII Encoded)

Equipment Cabinets \$45.00 to \$60.00 (19" With Fan)

Send for a free catalog or call Bill Blaney, toll free 800 258-1036 in NH 603-885-3705



Come to our showroom

WORLDWIDE ELECTRONICS, INC.

10 Flagstone Drive, Hudson, New Hampshire 03051 w16

ADDRESS .

Authors

do with Kilobaud - the type of article newcomers to computing want to read. If you've done anything at all with your own system you have the makings of an article which will help someone else through the woods. Write it. Invest a bit of your time at the typewriter and you'll have more money to expand your system. You may even be able to make each addition pay for itself with articles.

If you need detailed instructions on how to prepare an article drop a note to the Kilobaud Pre-Millionaires Klub, Peterborough NH 03458 and ask.

Readers want to know about everything new on the market ... how to get things working ... interfaced ...any gadgets you've built ... converted ... programs you've written. Make their life easier and more fun ... and get rich and famous as a result. Famous, anyway.

Write, Kilobaud @ Peterborough NH 03458.

ALDELCO COMPUTER **CENTER**

Kits, Books, Magazines Special 2102L1 8 for \$17.50. We stock OK Battery Operated Wire W∤ap tool \$34.95, OK Hand Wire Wrap Tool \$5.95. 7400 ICs CMOS, Timers PPL's. All kinds of transistors, rectifiers, and diodes.

Plus other electronic parts.

ZENERS	
1N746 to 1N759 400 Mw ea .25 1N4728 to 1N4764 1 w28	74H40
C1068 SCR S.65 MPSA14	2102-1 8/15.50 LM709 Min DIP Op Amp 45 LM741CE T05 Op Amp 45 5 14 or 16 Pin IC Sockets 30 We have Wire Wrap Sockets and Wire Wrap Wire — 50 feet \$1.98.
MJE340 (2N5655) 1.10 40673 RCA FET 1.55	ALDELCO KITS
741 or 709 14 Pin DIP 25 555 Timer 75 556 Dual 555 1.75 200 Volt 25 Amp Bridge 1.50 1N914 - 1N4148 15 for .99 1N34 - 1N60 - 1N64 10 for .99 CA 3028A Dif. Amp \$1.50 7490 60 LM399K Volt Reg 1.10 LM380N Audio Amp 1.75 1103 2.95	12 Hr. Alarm Clock Kit . \$19,95 Simulated Wood Cabinet . 4,00 12/24 Hour Clock Kit . 19,95 Simulated Wood Cabinet . 4,00 12/24 Hour Car or Boat Clock Kit Complete with cabinet and all parts for 12 V dc . 27,95 AC Power Pack for above . 2,95 Stop Watch Kit complete with Case Board and Parts . 29,95 Chesapeake Logic Probe Kit 14,95
Back Issues of Major	Computer Magazines.

SPECIAL 8080A NATIONAL \$19.95

Send stamp for our catalogue. Open Mon thru Sat 9 AM—5 PM, Wed till 9 PM.

We quote on any device at any quantity. Min. order \$6.00. Out of USA send certified check or money order. Add 5% for shipping.

2281K Babylon Tnpk, Merrick NY 11566. (516) 378-4555 A-2

TAKE ADVANTAGE OF US

DON'T DUMP YOUR MONEY INTO THE MAILBOX-THEN SIT AROUND AND WAIT!!
DON'T BUY FROM WANDERING MERCHANTS-WHO WON'T BE THERE WHEN YOU NEED THEM!!
A COMPUTER MART IS A PLACE WHERE THEY CARE
ABOUT YOU—AND YOUR COMPUTER EQUIPMENT. WE SELL THE BEST LINES, AT REASONABLE PRICES THAT'S HOW WE MAKE OUR LIVING.
WE HELP YOU GET YOUR SYSTEM UP AND RUNNING
WE WILL BE HERE TOMORROW AND

THE COMPUTER MART

THE NEXT DAY!

New York 118 Madison Avenue (ent. on 30th Street) New York NY 10016 (212) 686-7923 Closed Monday

Long Island 2072 Front Street Fast Meadow L.I. New York 11554 (516) 794-0510 Near Hempstead Turnpike

IMSAL PROCESSOR TECHNOLOGY, SOUTHWEST TECHNICAL PRODUCTS, OSI, SEALS ELECTRONICS, DIGITAL GROUP, APPLE COMPUTERS, TARBELL, OLIVER, CROMEMCO, TOL, CONTINEN-TAL SPECIALITIES, VECTOR, BBC VIDEO MONITORS, BOOKS, MAGAZINES, CHIPS, SOCKETS, CONNECTORS, AND ALL THAT C-32




IMSAI et al

MARKETLINE SYSTEMS, Inc.

2337 Philmont Ave. Huntingdon Valley, Pa. 19006 Phone 215/947-6670 M17

Introducing Equinox 100 computer kit



THE FRONTRUNNER

Equinox 100TM is the 8080 CPU/S-100 Bus computer kit that's years in front of Altair* and IMSAI in design, function and frontpanel programming capability. At \$699, it's clearly The Frontrunner. Write for free specs to Parasitic Engineering, P.O. Box 6314, Albany, CA 94706.

The Frontrunner from Parasitic Engineering

*A trademark of MITS Inc

■ 10% OFF LIST COUPON ■

I-8080 - Tabletop version of basic computer system . \$629.00

EXP-22 - Twenty-two slot mother board, when ordered with basic system 46.80

Illinois residents please add sales tax. We will ship UPS prepaid. We honor BankAmericard and Master Charge. Send us \$1.00 for catalog & \$1.00 credit memo.

WRITE FOR FREE QUOTE

Quality Security Systems Computer Sales 3407 Chambord Lane Q-4 M Hazelcrest IL 60429

MICROCOMPUTERS Inc.

539 AMHERST ST. HOURS: M,T,W: 10-6; NASHUA NH 03060 TH,F: 10-9 (603) 889-1646 SAT: 9-6

Computer Product Lines

Polymorphic STM Systems Baby 1

MOS Technology KIM series Texas Instruments

770 Intelligent Terminal 810 Printer

S-100 compatible Cromemco pro-

Merlin Intelligent Video Interface for IMSAI/Altair

North Star products

Microdisk with DOS/extended BASIC

S-100 compatible floating point Math Board

Kilobaud - Personal Computing - Bute 73-Interface Age

Repair services for all S-100 equipment and many of the other small computers.

INTERFACING SELECTRICS INTERFACE KITS AVAILABLE

- RS-232 ASCII Input, PRINT ONLY.
- Includes fourteen 24 volt solenoid drivers - you provide solenoids and mechanical mechanism.
- Closed loop operation controls CPU I/O card status for upper case and carriage return.
- Only \$325 w/o power supply (power supply versions available). Requires +5, -12, +24.


Send SASE for full specifications. BOOKS:

> INTERFACING SELECTRICS TO MICROCOMPUTERS\$12 SELECTING AND PURCHASING A FLOPPY DISK SYSTEM\$12

Center For The Study of the Future

4110 N.E. ALAMEDA PORTLAND OR 97212 503-282-5835



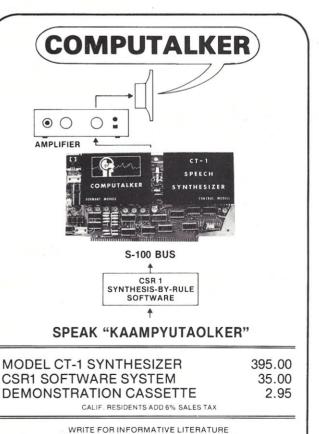

COMPUTALKER CONSULTANTS

P.O. BOX 1951, DEPT. K, SANTA MONICA, CA 90406

THE COMPUTER WORKSHOP

Representing: Compucolor Corporation

— Cromemco — The Digital Group —
Dutronics — Enclosure Dynamics —
ICOM — IMS Associates — Lear Seigler —
Mullen Computer Boards — National
Multiplex — North Star Computers —
Oliver Audio Engineering — Percom —
Polymorphic Systems — Prime Radix —
Programma Consultants — Sanyo — Seals

— Scelbi — Smoke Signal Broadcasting —
Southwest Technical Products — Sphere

— Tarbell — TDL — Terak Corporation —
Texas Instruments — Vector Graphics.

Order by mail, telephone, or pay a visit to one of our stores. We honor your Master Charge Card.

(Kansas City Area) 6903 Blair Rd. Kansas City MO 64152 tel. 816/741-5055

(Washington, D.C.) 5709 Frederick Ave. Rockville MD 20852 tel. 301/468-0455

C-31

RAINBOW COMPUTING, INC.

Supplier of
Wave Mate
The Digital Group
Digital Equipment Corp.
Computer products

Peripherals and Supplies from

PerSci Computer Devices
Centronix Lear-Siegler
Diablo Multi-Tech
Maxell Scotch

Texas Instruments

Specialists in Design, Implementation and Support of Custom Hardware/Software Systems for Business, Educational, and Personal Use. Experts in most major computer software

including CDC, IBM, PDP BASIC, COBOL, FORTRAN, PL1 LISP, SIMULA, SNOBOL, SPSS, BMD's COMPASS, MACRO, 6800 & Z80

assembly languages

10723 White Oak Ave. Granada, Hills CA 91344 —— (213) 360-2171 ——

R-12

THE COMPUTER CORNER

White Plains Mall, Upper Level 200 Hamilton Ave. White Plains NY 10601 Phone: (914) WH9-DATA

Near Bronx River Parkway & Cross Westchester Expressway. Plenty of parking.

"The S100 Bus stops at White Plains" with one of the largest collections of boards compatible with the Altair Bus (also IMSAI) in the greater NY area.

You've read about the Sol-20, now come up and see it. We carry Processor Tech, Polymorphic, IMSAI, North Star, TDL, Blast Master and Pickles and Trout.

GOOD PRICE AND SERVICE 10-6 Mon.-Sat. Thurs. till 9 C-28

THE COMPUTER CORNER



Now you can cook-up hot programs on your "8080"

A gourmet's delight of practical "how to" facts, including description of "8080" instruction set. How to manipulate '8080" stack. Flow charts. Source listings. Routines for multiple precision operation. Programming time delays for real time applications. Random number generators. Completely assembled floating point math program. Input/output processing for basic I/O programming through interrupt processing. Code, numeric conversion routines. Real time programming. Search/sort routines. Plus many more finger-lickin' goodies.

Order your copy of Scelbi's "8080" Software Gourmet Guide & Cook Book today! Only \$9.95 ppd. Bon appetite!



SCELBI COMPUTER CONSULTING INC.

1322 Rear Boston Post Road P.O. Bo× 133 PP STN Milford CT 06460 ● (203) 874-1573

GOOD BOOKS?

If you run across a book which you think other hobbyists would profit knowing about, why not write a brief review . . . including the name and address of the publisher (if you have it) and the price and send it to



Peterborough NH

Delivery is stoo	ck to 30 days. Write or call for detailed pro-	duct brochures.	1-10
	Eight Bit Digital to Analog Converter nt with order. Shipment prepaid.	Requires one eight bit output port. Use it to produce computer music.	ъ 19.00
TSM DAC8	Temperature Sensing Module	Use it to measure inside and/or outside temperature for computerized climate control systems, etc.	\$ 24.00 \$ 19.00
MCTK	RPOSE PERIPHERALS Morse Code Trainer/keyer	Hardware/Software package which allows your computer to teach Morse code, key your transmitter, and send prestored messages.	\$ 29.00
88-MODEM	Originate/Answer MODEM	Use your computer to call other computer systems such as large timesharing systems. Also allows other computer terminals to "dial-up" your computer.	\$199.00
88-UFC	Frequency Counter Module	Measure frequencies up to 600 MHz. Computer can monitor multiple frequencies such as transmit and receive frequency.	\$149.00
88-SPM	Clock Module	Your computer keeps time of day regardless of what program it is executing. Applica- tions include event logging, data entry, ham radio, etc.	\$ 96.00
S100 Bus Card	s (ALTAIR/IMSAI Compatible)	Uses	Kit Price
<u>Intern</u>	<u>ational Data Syste</u>	400 North Washington Street Falls Church, Virginia 22046 Telephone (703) 536-7373	

Your Mail Order Computer Shop...

IMSAI 8080 kit with 22 slots (limited quantity)	645.00
TDL Z-80 ZPU (the one with full software available now)	242.00
Edge Connectors and guides for IMSAI each	4.25
Edge Connectors and guides for IMSAI 10 for	40.00
Vector Graphic 8k RAM kit with 500 ns chips	225.00
Seals 8k RAM kit with 250 ns chips	260.00
North Star complete Micro-Disk System kit	599.00



WETAKE MASTER CHARGE OR BANKAMERICARD For phone and mail orders. (Add 4% of TOTAL ORDER for service charge)



TERMS: Shipping charges — \$10. per CPU or large units, \$1.50 per kit, \$2. minimum per order.

Provided stock is available, we will ship immediately for payment by cashiers check or money order.

Allow 3 weeks for personal checks to clear. New York State residents add appropriate sales tax.
PRICES SUBJECT TO CHANGE WITHOUT NOTICE.


For the best prices available on:


IMSAI ● TDL ● NORTH STAR ● POLYMORPHIC TARBELL ELECTRONICS ● SEALS ELECTRONICS


(315) 637-6208 WRITE: P.O. Box 71 • Fayetteville, N.Y. 13066











3 GROSS
OF 1976
BICENTENNIAL
CALENDARS
(WITH FREE
FELT PEN TO
CHANGE DATES)



ONE
HALF-YEAR'S
MEMBERSHIP
IN THE IEEE
COMPUTER
SOCIETY


INCLUDING AN AUTOMATIC SUBSCRIPTION TO COMPUTER MAGAZINE



20,000 200,000 70 THE FIRST 2 MILLION WHO SIGN UP.

WE'RE THROWING IN A FREE COPY OF MICROPHOCESSORS

&- MICROCOMPLITERS



A NEAT LITTLE COLLECTION OF REPRINTS FROM COMPUTER.

Organized and introduced by our technical editor, this volume carries a balanced selection of everything we've published in *COMPUTER* about micros over the past two years.

Circle reader service no. 111


Find out why membership in the IEEE Computer Society is one of the best investments you'll ever make.

* Offer expires July 1, 1977.



IEEE COMPUTER SOCIETY

5855 Naples Plaza / Long Beach, California 90803



The Midwest Affiliation of Computer Clubs invites you to attend the Second Annual, Midwest Regional Computer Convention and Exposition....

JUNE 10, 11, 12

COMPUTERFEST '77

BOND COURT HOTEL 777 St. Clair, Cleveland, Ohio

- > Manufacturers' Reps & Exhibits
- > Roofed Flea Market
- > Seminars & Tech Sessions
- > Club Congress
- > And Prizes, Games, Media Duping, and more....

The M.A.C.C. Convention is Where It's At in the Midwestern region. See you there! And if you plan to attend NCC, why not fly with us? Ask for information about the charter flight to Dallas. Drop a line to:

Still only



per ticket



Bearcat 211



Bearcat Features

- Crystal-less—Without ever buying a crystal you can select from all local frequencies by simply pushing a few
- Decimal Display—See frequency and channel number—no guessing who's on the air.
- 5-Band Coverage-Includes Low, High, UHF and UHF "T" public service bands, the 2-meter amateur (Ham) band, plus other UHF frequencies.
- Deluxe Keyboard—Makes frequency selection as easy as using a push-button phone. Lets you enter and change frequencies easily . . . try everything there is to
- Patented Track Tuning—Receive frequencies across the full band without adjustment. Circuitry is automatically aligned to each frequency monitored.
- Automatic Search—Seek and find new, exciting frequencies
- Selective Scan Delay-Adds a two second delay to prevent missing transmissions when "calls" and "answers" are on the same frequency.
- Automatic Lock-Out-Locks out channels and "skips" frequencies not of current interest.
- Simple Programming—Simply punch in on the keyboard the frequency you wish to monitor
- Space Age Circuitry—Custom integrated circuits . . . a Bearcat tradition.
- · UL Listed/FCC Certified—Assures quality design and
- Rolling Zeros—This Bearcat exclusive tells you which channels your scanner is monitoring. Tone By-Pass—Scanning is not interrupted by mobile
- telephone tone signal. • Manual Scan Control-Scan all 10 channels at your own pace
- · 3-Inch Speaker-Front mounted speaker for more sound with less distortion
- · Squelch-Allows user to effectively block out unwanted
- · AC/DC—Operates at home or in the car.

Bearcat 211 **Specifications**

Frequency Reception Range

requeitly neceptio	ii ivange
Low Band	32—50 MHz
"Ham" Band	146—148 MHz
High Band	148—174 MHz
UHF Band	450-470 MHz
"T" Band	470-512 MHz

*Also receives UHF from 416-450 MHz

105%" W x 3" H x 75%" D

Weight 4 lbs. 8 oz.

Power Requirements 117V ac, 11W; 13.8 Vdc, 6W

Audio Output 2W rms

Antenna

Telescoping (supplied)

Sensitivity

0.6µv for 12 dB SINAD on L & H bands

U bands slightly less

Selectivity

Better than $-60 \, dB \, @ \pm 25 \, KHz$

Scan Rate

20 channels per second

Connectors

External antenna and speaker: AC & DC power

Accessories

Mounting bracket and hardware DC cord



COMMUNICATIONS ELECTRONICS

Box 1002 Ann Arbor, Michigan 48106 USA





The Bearcat® 210 is a sophisticated scanning instrument with the ease of operation and frequency versatility you've dreamed of. Imagine, selecting from any of the public service bands and from all local frequencies by simply pushing a few buttons. No longer are you limited by crystals to a given band and set of frequencies. It's all made possible by Bearcat spaceage solid state circuitry. You can forget crystals forever.

Pick the 10 frequencies you want to scan and punch them in on the keyboard. It's incredibly easy. The large decimal display reads out each frequency you've selected. When you want to change frequencies, just enter the new ones.

Automatic search lets you scan any given range of frequencies of your choice within a band. Push-button lockout permits you to selectively skip frequencies not of current interest. The decimal display with its exclusive "rolling zeros" tells you which channels you're monitoring. When the Bearcat 210 locks in on an active frequency the decimal display shows the channel and frequency being monitored.

With the patented track-tuning system, the Bearcat 210 automatically aligns itself so that circuits are always "peaked" for any broadcast. Most competitive models peak only at the center of each band, missing the frequencies at the extreme ends of the band.

The Bearcat 210's electronically switched antenna eliminates the need for the long low band antenna. And a quartz crystal filter rejects adjacent stations as well as noise interference.

Call toll-free 800-521-4414 now to place a BankAmericard or Mastercharge order. This is our 24 hour phone to our order department and only orders may be processed on this line. To order in Michigan or outside of the U.S. dial 313-994-4441.

Add \$5.00 for U.S. shipping or \$9.00 for air UPS to west coast. Charge cards or money orders only please. International orders invited. Michigan residents add tax. Please write for quantity pricing.

C5

MICROCOMPUTER

PROM'S	Name and Address of the Owner, where the Owner, which is the Owner, where the Owner, which is the Owner, where the Owner, which is the Owner, whic	27.00		100			
H-1024-5B	256 x	4 B	it 70	ns 0	C		4.25
1702A	256 x	8 B				ble	
1702AL	256 x	8 B	it 1	us T	S Eras	Lo Pwr	7.00
2704	512 x	8 B	it 450	ns T	S Erasa	ble	30.00
2708	1024	x 8 1	Bit 45		TS Eras		
5203AQ	256 x	8 B	it 1	us T	S Erasa	ble	9.00
5204AQ				us T.	S Erasa	ble	12.00
HM7611-5			it 60	ns T	S		3.25
748287				ns T	S		9.00
748387				ns O	C		9.00
82\$23B				ns 0			4.00
828129B							4.25
8223B	32 x	8 B	it 50	ns O	C		4.50
WAVEF	ORM GE	NERAT	OR			-	
8038	V	СО					4.50
	4 D		/CO				2.75
566	V	CO-Fi	inction	n			2.00
			-				
CHARACT	ER GEN	ERATO	ORS				
2513	C+7 C	line	CM21	10 IIn	nor cas	C	6.75
WC4 5 7 1				· o up	rei cas	-	12.00

		5x7 5 line CM2140 Upper case 7x9 7 line CM3421 (Signetics)	6.75 12.00 5.00	
-	SHIFT R	EGISTERS DYNAMIC		
		1024 x 1 Bit 2.5 MHz 512 x 1 Bit 2.5 MHz	3.00	
-		STATIC		
	2509K 2518B 2533V TMS3002 TMS3112	100 x 2 Bit 1.5 MHz 32 x 6 Bit 2.0 MHz 1.5 MHz 1.5 MHz 2.0 MHz 1.5 x 2 Bit 1.5 MHz 2.0 MHz 2.0 MHz 1.5 MHz 2.0 MHz 1.5	.89 1.00 3.95 2.00 1.00 3.95 2.00	
	NH0025CN	R COMPONENTS Dual Low Cost MOS Clock Driver 5 MHz Dual MOS Clock Driver Bi-Directional One Shot Quad Bus Driver/Receiver	1.75 3.00 4.00 3.25	

NH0025CN	Dual Low Cost MOS Clock Driver	1.75
NH0026CN	5 MHz Dual MOS Clock Driver	3.00
N8T20	Bi-Directional One Shot	4.00
N8T26	Quad Bus Driver/Receiver	3.25
N8T97	Tri State Hex Buffer	1.15
DM8098	Tri State Hex Inverter	1.00
1488	RS232 Quad Line Driver	1.95
1489	RS232 Quad Line Receiver	1.95
D-3207A	Quad NAND to MOS Driver	2.50
C-3404	6 Bit Latch 12 ns O/P Delay	3.95
P-3408A	Tri State Hex MOS Sense Amp	6.75
P-4201	Clock Generator	4.95
MM-5320	T V Camera Sync Generator	6.00
MM-5369	Oscillator Pre-Scaler	2.00
DM-8130	Ten Bit Comparator	2.25
DM-8131	6 Bit Comparator	2.00
DM-8831	4 Input AND NAND Tri State	2.50
DM-8833	Quad Tri State Transceiver (True)	2.50
DM-8835	Quad Tri State Transceiver (Inv)	

AYS-1013 (TR1602A) 30 KHz					
	AY5-1013	(TR1602A)	30	KHz	6

8008-1 8080 8080A 280 F8	8 Bit CPU Improved 8008 Super 8008 CPU (3880) CPU (3850)	18.7 22.9 24.9 39.9 29.9
Support	Devices	
3851	Program Storage Unit (F-8)	19.9
3853	Static Memory Interface (F-8)	19.9
3881	Parallel 1/0 Controller (2-80)	
3882	Counter Timer Circuit (2-80)	19.9
8212	8-Bit 1/O Port	4.2
8214	PriorityInterrupt Control	12.9
8216	Bi-Directional Bus Driver	5.2
8224	Clock, Generator & Driver	6.0
8228	System Controller & Bus Driver	9.2
8251	Programmable Communication Int	12.0
8255	Programmable Peripheral Interface	e12.0
	Progr Direct Mem Access Control	23.0

1103	1024	x	1	Bit	300	ns			1.50
2107A	4096	x	1	Bit	300	ns			6.00
2107B	4096	x	1	Bit	200	ns			6.50
2107B-4	4096	x	1	Bit	270	ns			5.00
2107B-6	1096	x	i	Bit	350	ns			4.50
4008P-6	1024	X	1	Bit	500	ns			2.75
4050NL	4096	x	1	Bit	300	ns			4.00
MM5261	1024	x	1	Bit	400	ns			3.00
MM5262	2048	X	1	Bit	365	ns			3.00
MM5270	4096	X	1	Bit	200	hs	(18	pin)	4.00
MM5280	4096	x	1	Bit	200	ns	(22		6.00

211.02-1	1024	x	1	Bit	500	ns	TS		2,00
311.01	16	X	4	Bit	110	ns.	OC		2.00
1101A	256	x	1	Bit	:	us	TS		1.00
2101	256	x	4	Bit	1	us	TS		3.00
2102	1024	x	1	Bit	1	us	TS		1.50
2102-1	1024	X	1	Bit	500	ns	TS		1.75
2111A-4	256	X	1	Bit	450	ns	TS	(18	pin)4.45
2112A-4	256	x	4	Bit	450	ns	TS	(16	pin)2.45
2501B	256	x	1	Bit	1	us			1.45
3107	256	x	1	Bit	80	ns	OC		2.9
74089	10	x	4	Bit	280	ns	TS		5.00
748201	250	x	1	Bit	50	ns	TS		4.7
91L02A	1024	X	1	Bit	500	ns	TS		2.00
7489	16	x	4	Bit	60	ns	OC		2.25
8225	16	X	1	Bit	50	ns	OC		1.50
8599	16	x	1	Bit	5.0	ns	TS		1.50

64 x 4 Bit 1.0 MHz

JADE CO. OFFERS

THE ITEMS SHOWN IN THIS AD FOR IMMEDIATE SHIPMENT FROM STOCK. IN ADDITION WE STOCK OVER 4,000 OTHER ITEMS. INCLUDING:

- 1. All Standard, Hi-Speed, Low Power, Schottky TTL Product
- 2. All Linear Devices
- 3. Transistors-Diodes
- 4. Clock Kits & Modules
- 5. Vectors & AP Products
- 6. Resistors-Capacitors
- 7. Video Games & Chips
- 8. PROM Setters [E-Prom]
- 9. Wire & Wire Wrap Tools


SPECIAL OF THE MONTH

2708 E-PROM Price \$35.00 ea.





Digital Clock Module



FEATURES

4-digit 0.5 display

4-digit 0.5 display

4-digit 0.5 display

*Complete, needs only

transformer 5 switches

*Clock Radio Alarm

*12 hr 5 60Hz

*Power Failure Indicator

*Direct Drive-No RFI

APPLICATIONS
*Clock radio timers
*Desk Clocks
*Instrument panel clocks

MA 1002 A \$10.95


TRANSFORMER, 14 VCT AC SCHEMATIC TO POWER MA 1002A \$1.75

FAST SET GND NC PARK LIGHTS BATTERY DASH LAMPS IGNITION 12 09 SLOW SET
O •• Display O

- * Operates on 9-12 V DC
 * 0.3" green display
 * Internal time base
 * Display color filterable
 to blue, green & yellow
 * Lock out of time set
 when display is "OFF"

MA 1003 \$24,95

6.75



FEATURES
* MM5316 Clock Chip
*Needs only case f₆
12 V AC * 200 ma
*Blanking control
*AM PM Option
*24 hr Capability
*59 minute timer
*Power Failure indicator
*24 hr clock radio

NIXIE CLOCK KIT \$12.95 Transformer 110-14V AC 200ma \$1.50 TIME BASE CHIP

17 Stage Osc/Divider

OCK CHIPS 4 Digit w/BCD-7 Seg 12/24 hr 4.50 50/60 Hz MM5312N MM5318N TV Display Digital Clock 8.95

Gas Discharge Display 12/24 4.00 60° Hz. 59 min timer. AM/PM MMS375NAC 4/6 digit, date counter, 50Hz 2,00 6 digit calender, alarm, 12/24 hr

74LS00

Flop.
Octal is.
J III/DV CTR
we OR Gate.
1 Adder (POS)
Jiv 7 Seg Out N/B
rsal Bus Register
Register
Adder (Neg)
Ster

CMOS

11 Stage Binary Ctr/Osc 256 x 1 Static RAM -1-Bit Magnitude Comparat Quad hilateral Sw. Her Inverted Sate Hex Inverted Sate Hex Inverted Comparation Guad 2 Input OR Gate Triple 3 Input OR Gate Triple 3 Input OR Gate Caud D Type Register Quad 2 Input AND Gate Dual 4 Input AND Gate Dual 4 Input AND Gate Dual 4 Input AND Gate Register Mark Sate Decade Counter, MS Mc Binary Counter
Hex D Filey Tipe
4-Bit Univ Shift Register
Triple Gate
Triple Gate
Hex D Filey Tipe Gate
Hex Three State Ruffer
Hex Three State Ruffer
Hex Three State Ruffer
Hex Three State Ruffer
BOL To 7 See Latch/Hexd/Pr
4/16 Line decoder (Ho)
4/16 Line decoder (Ho)
4/16 Line decoder (Ho)
4/16 Line Mecoder (Ho)
4/16 L

CONNECTORS

.156 N W Gold .50 .156 N W Gold .75 .156 Solder Gold 2.25 .125 Solder Gold No 3.50 Down Ears) type w/edge clip c 8 male (solder)







Electronics for the Hobbiest and Experimenter

74LS196 74LS248 74LS251

74LS266 74LS363

74LS386

1.00 1.00

5351 WEST 144th STREET LAWNDALE, CALIFORNIA 90260 (213) 679-3313

SOCKETS

I C SOCKETS Pins Description Price Description
Lo Pro Tin
Transistor IC-10) Gold
Transistor IC-10) Gold
Wire Wrap Tin
Gold
Lo Pro Tin
Standard P C Tin
Wire Wrap Tin
Lo Pro Topen Frame Tin
Mire Wrap Tin
Lo Pro Open Frame Tin
Wire Wrap Tin
Tin
Wire Wrap Tin
Tin
Wire Wrap Tin
Tin Wire Wrap Tin
Wire Wrap Tin
Lo Pro (Open Frame) Tin
Wire Wrap Tin
Wire Wrap Tin
Lo Pro (Open Frame) Tin
Wire Wrap Tin
Lo Pro (Open Frame) Tin
Wire Wrap Tin
Wire Wrap Tin .95 .50 .85

J6


COMPUTER MUSIC WITH OR WITHOUT THE COMPUTER!

EQUALLY TEMPERED DIGITAL TO ANALOG CONVERTER

Unlike more conventional R-2R ladder type digital to analog converters, the PAIA 8780 kit is based on a multiplying principle that allows the module to generate the exact exponential stair-step function required to make even the simplest linear response oscillators and filters produce equally tempered musical intervals. The 8780 uses only six bits of data to generate over 5 octaves of control voltage. In an 8 bit system, the remaining 2 bits are ordinarily reserved for trigger flags, but may be used to extend the range of the converter or provide micro-tonal tunings.

The module is physically and electrically compatible with the complete line of PAIA music synthesizer modules and is easily interfaced to any micro-processor with or without hand-shaking logic.

#8780 D/A CONVERTER Kit..\$34.95 (plus \$1.00 postage)





THE PAIA HIGH LEVEL LANGUAGE FOR COMPUTER MUSIC DATA ENTRY (We call it a keyboard)

An n key roll-over scanning matrix encoder tied to a 37 note AGO keyboard provides 6 bits of data and both STROBE and STROBE control outputs. Input control lines to the encoder include SCAN (starts and stops encoder clock), RESET, START and RANDOM making the keyboard universally applicable to all computer/processors from the very largest to the very smallest.


NO COMPUTER? The encoded keyboard can be directly interfaced to the PAIA 8780 Equally Tempered Digital to Analog converter to provide an infinite hold Sample and Hold device. The keyboard contains its own power supply for stand-alone applications.

Housed in a trim and sturdy vinyl covered road case, the kit consists of all parts including keyboard, power supply and detailed assembly instructions; software overview for computer applications and detailed instructions for Digital Sample and Hold.

#8782 ENCODED KEYBOARD ... \$109.95 20 lbs. (shipped freight collect)

WITH A COMPUTER

Both the 8780 D/A and the 8782 Encoded Keyboard easily interface to any processor providing capabilities and control never before possible with music synthesizers.



WITHOUT A COMPUTER

An infinite hold, DIGITAL Sample and Hold and the heart of an entire system of modules that will be introduced over the next few months including: Memories, Polytonic output modules and others.



DETAILS ON THESE & MORE

IN OUR FREE CATALOG

ELECTRONICS, INC. -

1020 WEST WILSHIRE BLVD. -

OKLAHOMA CITY, OK 73116

CRYSTALS 3 1.000 MHz 2.000 MHz 4.000 MHz 5.000 MHz 10.000 MHz 14.31818 MHz 18.000 MHz 20.000 MHz 32.000 MHz \$4.95 \$4.95 \$4.95 \$4.95 \$4.95 \$4.95

XR-2206K	3 Kit \$2	7.00 Spec	ial xr	-2206KA Kit	\$17.00
WAVEFO	RM	pm \/ /		TIME	RS
GENERAT	ORS	$ \times$ L	$^{\prime}$	XR-555CP	S. 39
XR-205	\$8.40		711	XR-320P	1.55
XR-2206CP	4.49			XR-556CP	1.85
XR-2207CP	3.85	MISCELLAN	IEOUS	XR-2556CP	3.20
		XR-2211CP	\$6.70	XR-2240CP	3.25
STEREO DEC	ODERS	XR-4136	.99	PHASE LOCK	ED LOOPS
XR-1310CP	\$3.20	XR-1468	3.85	XR-210	5.20
XR-1310EP	3.20	XR-1488	5.80	XR-215	6.60
XR-1800P	3.20	XR-1489	4.80	XR-567CP	1.95
XR-2567	2.99	XR-2208	5.20	XR-567CT	1.70

CONNECTORS PRINTED CIRCUIT EDGE-CARD

.156 Spacing-Tin-Double Read-Out Bifurcated Contacts — Fits .054 to .070 P.C. Cards \$1.95 15/30 PINS (Solder Eyelet) PINS (Solder Evelet) \$2,49 18/36 22/44 PINS (Solder Eyelet) 50/100 (.100 Spacing) PINS (Solder Eyelet) \$6.95 25 PIN-D SUBMINATURE

DR25F PILIG DB25S SOCKET \$4.95



This 0-2 VDC. 05 per cent digital voltmeter features the Motorola 3½ digit DVM chip set. It has a .4" LED display and operates from a single +5V power supply. The unit is provided complete with tan injection molded black plastic case complete with Bezel. An optional power supply is available which fits into the same case as the 0-2V DVM allowing 117 VAC operation.

A. 0-2V DVM with Case B. 5V Power Supply

\$49.95 \$14.95

VECTOR WIRING PENCIL

nnections between the wrapped wire and code by soldering. Complete with 250 FT of 95

Mile		SPECIAL \$7.9	
REPLACEMENT WIR	E — BOBBINS	FOR WIRING PENCIL	
W36-3-A-Pkg 3	250 ft 36 AW	G GREEN \$2 40	

W36-3-A-Pkg.						\$2.40
W36-3-B-Pkg.		250 ft.				\$2.40
W36-3-C-Pkg.	3	250 ft.	36 A	WG	CLEAR	\$2.40
W36-3-D-Pkg.	3	250 ft.	36 A	WG	BLUE	\$2.40

£	1/16 VECTOR BOARD						
1/2	0.1" Hole Spacing	.1" Hole Spacing P-Pattern		Price			
******	Part No.	L	W	1	2-Up		
PHENOLIC	64P44 062XXXP	4.50	6.50	1.72	1.54		
	169P44 02XXXP	4.50	17.00	3.69	3.32		
EPOXY	64P44 062	4.50	6.50	2 07	1.86		
GLASS	84P44 062	4.50	8.50	2.56	2.31		
	169P44 062	4.50	17.00	5.04	4.53		
	169P84 062	8.50	17.00	9.23	8.26		
EPOXY GLASS	169P44 062C1	4.50	17.00	6.80	6.12		





HEXADECIMAL ENCODER 19-KEY PAD



- ARCDEF
- · Return Key
- · Optional Key (Period) Kev

\$10.95 each

63 KEY KEYBOARD

This keyboard features 63 uner coded SPST keys, unattached to any kind of P.C.B. A very soli molded plastic 13" x 4" bas suits most applications.

\$19.95 HD0165 16 LINE TO FOUR BIT PARALLEL KEYBOARD ENCODER

JOYSTICK

These joysticks feature four * potentiometers, that vary resistance proportional to the angle of the stick. Sturdy metal construction with plastics components only at the mova-ble joint. Perfect for electronic games and instrumentation

Special *5K Pots \$4.95 *100K Pots \$7.95

MICROPROCESSOR COMPONENTS

B Bit Input/Output Priority Interrupt Control 3i-Directional Bus Drive Clock Generator/Driver - with user manual CPU'S Super 8008 Super 8008 SR'S		MC6830L7 Z80 0	P1 128 x 8 7 1024 x CPU	PU Interface Adapter 3 Static RAM 8 Bit ROM	35.00 15.00 6.00 18.00 49.95
Priority Interrupt Control 3i-Directional Bus Drive Clock Generator/Driver - with user manual CPU'S Super 8008 Super 8008	ol 15.95 er 6.95 10.95 39.95	MC6820L MC6810Al MC6830L Z80 (Periph. P1 128 x 8 7 1024 x CPU	Interface Adapter 3 Static RAM 8 Bit ROM	15.00 6.00 18.00
Bi-Directional Bus Drive Clock Generator/Driver - with user manual CPU'S Super 8008 Super 8008	6.95 10.95 39.95	MC6810AI MC6830L7 Z80 0	P1 128 x 8 7 1024 x CPU	8 Static RAM 8 Bit ROM	6.00 18.00
Clock Generator/Driver - with user manual CPU'S Super 8008 Super 8008	10.95 39.95	MC6830L7 Z80 0	7 1024 x CPU	8 Bit ROM	18.00
- with user manual CPU'S Super 8008 Super 8008	39.95 24.95	Z80 0	PU		
CPU'S Super 8008 Super 8008	24.95	1101		RAM'S	49.95
Super 8008 Super 8008				RAM'S	
Super 8008					
	19.95		256 x 1	Static	\$ 1.49
SR'S		2101	256 x 4	Static	5.95
SR'S		2102	1024 x 1	Static	1.75
		2107/5280	4096 x 1	Dynamic	4.95
1024 Dynamic	\$ 3.95	2111	256 x 4	Static	6.95
Hex 32 BIT	7.00	7489	16 x 4	Static	2.49
Hex 40 BIT	4.00	8101	256 x 4	Static	6.95
512 Dynamic	2.49	8111	256 x 4	Static	6.95
1024 Dynamic	6.00				3.49
Dual 256 BIT	3.95				2.25
	4.00				6.95
					2.95
		MM5262	2K x 1		2 for 1.00,
					27072
16 x 4 Reg.	3.95				\$ 9.95
					14.95
					5.00
30K Baud	\$5.95		32 x 8		5.00
					7.95 3.95
ROM'S					29.95
Char. Gen.	\$ 9.95				3.49
Char Gen	10.95				2.95
ona. oo			256	Tri-State Bipolar	2.95
	Dual 256 BIT Dual 512 BIT Qual 50 BIT 1024 Static S Fito 16 x 4 Reg. UART'S 30K Baud ROM'S	Dual 526 B1T 3,95 Dual 512 B1T 4,00 Dual 512 B1T 3,95 Dual 512 B1T 3,95 Dual 512 B1T 3,95 Dual 512 B1T 3,95 Dia 515 Char Charles UARTS 30K Baud \$5,95 ROM'S Char Gen \$9,95	Dual 526 BIT 3 95 911.02 Dual 512 BIT 4.00 74200 Dual 50 BIT 3.95 10MS582 Fito 5 95 10MS582 Fito 3 95 17/02A SC03 5003 5203 30K Baud 55.95 825123 745287 745287 745287 Char Gen \$ 9.95 6001-1	Dual 256 BIT 3 95 91102 1024 x1 Dual 312 BIT 4 00 74200 256 x x 1 Dual 8 BIT 3 95 93421 256 x 1 1024 Static Special 5.95 117028 22 x 1 Fito 6 95 11702A 2048 16 x 4 Reg 5203 2048 2048 LUARTS 802523 2 x 8 30K Baud 55.95 825123 32 x 8 745287 1024 ROMS 2768 8K Char. Gen \$ 9.95 6301+1 1024 Char. Gen 10.95 6301-1 1024	Dual 256 BIT 3 95 91L02 1024 x 1 Static Dual 312 BIT 4 00 74200 256 x 1 Static Dual 8 BIT 3 95 93421 256 x 1 Static D4024 Static Specal 5 95 MMS582 2 x 1 Dynamic Flo 3 95 1702A 2048 Famos LUARTS 82823 22 x 8 Open C. 30K Baud \$5.95 828123 22 x 8 Tristate 74X287 1024 5tatic 5tatic 5tatic ROMS 8 6301+1 1024 Tri-State Bipolar Chair, Gen 9.95 6301+1 1024 Tri-State Bipolar Chair, Gen 10.95 6303-1 256 0pen Collector Bipolar

AY-3	-8500-1	\$19.95	SPECIAL	REQU	JESTED I	TEMS			
MC30	061P	3.50	CD4508	6.75	82S115	25.00	3341	6.95	
MC40	116P (74416)	7.50	CD4515	6.50	5841	9.95	9368	3.95	
MC14	1583	3.50	CD4520	2.70	MK50240	17.50	MC1408L7	9.95	
MC14	1562	14.50	MCM6571	17.50	11090	19.95	LD110/LD111	25.00/set	
CD40	59	9.95	MCM6574	17.50	DS0026CH	3.75	AY-5-9100	17.50 ea.	
CD40	70	.95	MCM6575	17.50	TIL308	10.50	95H90	13.95	

PARATRONICS

WEEKS DELIVERY

Featured on February's Front Cover of Popular Electronics

Logic Analyzer Kit

conditions




MODEL 100A \$189.00/Kit

- Troubleshooting microprocessor address, instruction, and data flow Examine contents of ROMS
 - Tracing operation of control logic
 - Checking counter and shift register operation
 Monitoring I/O sequences
 - Verifying proper system operations
 - during testing

Easy to assemble — comes with step-by-step construction manual which includes 80 pages on logic analyzer operation.

BUGBOOK ®

Continuing Education Series



BUGBOOK IIa - Introduces UART — recommended for RTTY enthusiast \$5 00/hook Explores 8080 chip - introduces

Mark 80 Microcomputer 555 TIMER APPLICATIONS SOURCEBOOK WITH

EXPERIMENTS - over 100 design techniques \$6.95/book CMOS-M-DESIGNERS PRIMER AND HANDBOOK a complete CMOS instruction manual \$6.00

SPECIAL - \$42.95

CONTINENTAL SPECIALTIES

PROTO BOARD 6 \$15.95 (6" long X 4" wide)

• THE RE

Other CS Proto Boards PB100 - 4.5" x 6" PB101 - 5.8" x 4.5" \$ 19.95 29.95 PB102 - 7" x 4.5" PB103 - 9" x 6" 59.95 79.95 PB203 - 9 75 x 61/2 x 23/4 75.00 PB203A - 9.75 x 6½ x 2¾ 120.00 (includes power supply)

Logic Monitor
for DTL, HTL, TTL or CMOS Devi \$84 95

PROTO CLIPS 14 PIN \$4.50 16 PIN 4.75 24 PIN 8.50

DESIGN MATES DM1 - Circuit Designer 54.95 DM2 - Function Generator DM3 - RC Bridge

59.95

#holes 590 bus strip 470

470 bus strip 350 bus strip 180 120 80 70

QT PROTO STRIPS

**************************************	OT-7S	Experimen Experimen	
0T-35S	CHICAGO.		
• ner net atte næ net set ett - 0T-47B	Thurs OT-8S	QT-8S QT-7S	80 70
· DED 2011 11 11 11 11 11 11 11 11 11 11 11 11	CHARRIES.	QT-12S	120
• N. H. I. S. C. L. N. L. L. L. L. C.	AMERICA OT-12S	QT-18S	180
• OT-598	*100 High *	QT-35B	bus strij
SARTHRONION CHARLESTOR	• Managham • QT-18S	QT-47B QT-35S	bus strij 350
0T-59S	* (IIIII III I	QT-47S	470
lation - Glass and a control of the		41 000	Dua Still

\$5.00 Minimum Order — U.S. Funds Only California Residents — Add 6% Sales Tax

Spec Sheets - 25¢ — Send 35¢ Stamp for 1977A Catalog Dealer Discount Available — Request Pricing

HOW OPEN SATURDAYS **ELECTRONICS**

1021-A HOWARD AVE., SAN CARLOS, CA. 94070 PHONE ORDERS WELCOME — (415) 592-8097 All Advertised Prices Good Thru June

J1

3.75 3.25 3.00

\$ 9.95

\$10.95

Timeband

Digital Alarm Clocks



(.8" high)

• AM/PM Indicator of button C-500B - Ebony Case • \$16.95 • Power failure indicator

 Doze Button
 100% Solid State
 Large Red Led Display · Seconds display at touch

C-8211

· One year factory warranty DIGITAL AUTO INSTRUMENT

SEVEN DIFFERENT INSTRUMENTS!
MEETS OR EXCEEDS ORIGINAL AUTOMOTIVE SPECS.
Please specify which one of the seven models you want
when ordering—these do not all come in one unit.
Each model must be bought separately.

TACHOMETER 0-9900 RPM 4, 6 or 8 Cyclinders 4 SPEEDOMETER*

2 WATER TEMP. FUEL LEVEL Low Fuel Indicator

6 OIL TEMP

5 OIL PRESSURE

7 BATTERY MONITOR

BRIGHT YELLOW ORANGE .3" LED DISPLAY!

Kit includes case, bracket and all componets — complet Nothing else to buy! 12 Volt NEG GRD.

DIMENSIONS: 4½ x 4 x 2 KIT: \$49.95
Add \$10.00 for required speed transducer. ASSEMBLED: \$59.95

DIGITAL STOPWATCH

- Bright 6 Digit LED Display
 Times to 59 minutes 59:59 seconds
 Crystal Controlled Time Base
 Three Slonywatches in One
 Times Single Event Split & Taylor
 Size 4.5" x 2.15" x 90" (4½ ounces)
 Uses 3 Penlite Cells.

\$39.95 Assembled - \$49.95





Stop Watch Chip Only (7205)

ELECTRONIC 'PENDULUM' CLOCK



- Swing Pendulum .7" Hours and Minutes Display 12 or 24 Hour Mode
- Time Set Push Buttons Alarm Feature
- Kit-unfinished

\$59.95 (case unassembled) Assembled-stained

(case assembled)

OUARTZ DIGITAL AUTO CLOCK OR ELAPSED TIMER!

lapsed Timer: Hrs. Mins and Secs 12 or 24 Hr Capacity Simple Reset - Start Pushbutton Simple

omplete kit includes mounting bracket, se and all components, nothing else to y, Features MM5314 chip: Large. 4" LED's. curacy better than ± min. per mo. internal ttery backup. 12 volt non-polar operation. DIMENSIONS: 4½" x 4" x 2 12 or 24 HOUR MODE

Assembled: \$39.95

CASE ONLY (includes hardware, mounting bracket and bezel) \$6.50



JE700 CLOCK

of 6" x 21/2" x 1"

115 VAC

\$17.95



DIGITAL CLOCK KIT — 31/2 INCH DIGITS 4 DIGIT KIT \$49.95

4 DIGIT ASSEMBLED \$59.95 6 DIGIT ASSEMBLED \$79.95

This clock features big 3%" high digits for viewing in offices, auditoriums, etc. Each digit is formed by 31 bright 0.2" LED's. The clock operates from 17 VAC, has either 12 or 24 hr. operation. The 6 digit version is 27" \times 36" \times $x \, 15$ " and the 4 digit is 16" \times 35" \times 15". Kits come complete with all components, case and transformer.

Specify 12 or 24 Hour When Ordering

JE803 PROBE

The Logic Probe is a unit which is for the most part indepensable in trouble shooting logic families. TIL. DTL. RTL. LOWS it derives the power it needs to operate directly off of the circuit under section of the control of the circuit under section of the circuit of the circuit under section of the circuit of the circuit under section of the circuit of th



printed circuit board



T2L 5V 1A Supply

\$9.95 Per Kit

HUICO PRESENTS THE ...

MARK II

FREQUENCY COUNTERS

HOOKUP IS A PIECE O' CAKE

with better than 50mv sensitivity, direct connection to the circuit under test is unnecessary in most cases.

FREQUENCIES JUMP OUT AT YOU from the giant 1/2" readouts.

GREATER FREQUENCY RANGE

the 60 mHz typical frequency response gives you 80-10 meters plus 6 meters — 50mHz guaranteed.

AND ... YOU'LL FIND ENDLESS NEW APPLICATIONS FOR THE "BURNOUT PROOF" MARK II With the overload protected front end you can use this counter anywhere in a circuit without fear of burnout. Use the Mark II to test: receiver local oscillators, grid dip meters, RF signal generators, audio generators, touch tone pads (when extend installed), micro-processor timing signals, modems, function generators ... YOU NAME IT!!!

HUFCO QUALITY AS ALWAYS ● SAME HI-QUALITY G-10 GLASS EPOXY DOUBLE-SIDED PC BOARDS • SAME TTL IC'S • MORE THAN EVER . . . AMERICA'S BEST BUY IN DIGITAL FREQUENCY COUNTERS!

The TWS MARK II is available in three frequency ranges:

0-50 mHz - 0-250 mHz - 0-500 mHz



RUSH THIS COUPON TODAY!

This is what I've been looking for: A Goof-proof low co
Frequency Counter! Send me:
□ 500 mHz Frequency Counter - 169.95 kit/199.95 assemble
□ 250 mHz Frequency Counter - 129.95 kit/159.95 assemble

□ Information on other handy Hufco Products. Enclosed is Check - Money Order - BAC/MC Bankcard OK!

□ 50 mHz Frequency Counter - 79.95 kit/99.95 assemble

___Exp. Date __/_/_

Name

Address City/State/Zip _

Mail to: Box 375, Dept. K 1603 W. 800 N.

Provo, Utah 84601 801/375-8566

SPECIAL PRICING! PRIME - HIGH SPEED RAM

400 NS

LOW POWER - FACTORY FRESH

\$1.95 ea 1-24 25-99 1.75 ea

100-199 \$1.60 ea 200-499 1.45 ea

OVER 500 PCS. 1.39 ea.

PRINTED CIRCUIT BOARDS for CT-7001 Kits sold separately with assembly info. PC Boards are drilled Fiberglass, solder plated and screened nent layout.

Specify for 7001 B, Cor X - \$ 7.95

p & &

S-DIGIT LEO CLOCK CALEDDAR DATE-TIME-SODDZE ALARM È MORE

FOR THE BUILDER THAT WANTS THE BEST. FEATURING 12 OR 24 HOUR TIME -

29-30-31 DAY CALENDAR. ALARM, SNOOZE AND AUX. TIMER CIRCUITS

Will alternate time (8 seconds) and date (2 seconds) or may be wired for time or date display only, with other functions on demand. Has built-in oscillator for battery back-up. A loud 24 hour alarm with a repeatable 10 minute snooze alarm, alarm set & timer set indicators. Includes 110 VAC/60Hz power pack with cord and top quality components through-out.

KIT - 7001X WITH 6 - .6" DIGITS \$45.95

KITS ARE COMPLETE (LESS CABINET)

QTY

6-11

*11⁹⁵

*10⁹⁵

00 18:06 022953

DISPLAY



7001 X DISPLAY ALL 7001 KITS FIT CABINET I AND ACCEPT QUARTZ CRYSTAL TIME BASE KIT # TB-1

5 DIGIT LED <u>CLOCK KIT * 850-4</u>

12/24 HR. OPERATION BIG .4" DIGITS - 50/60 HZ OPERATION.

Kit # 850-4 will fit Plexiglas Cabinet II

08 08 08

KIT INCLUDES INSTRUCTIONS

QUALITY COMPONENTS •50 or 60 Hz OPERATION

12 or 24 HR OPERATION LED Readouts(FND-359 Red, com. cathode) MM5314 Clock Chip (24 pin)

The only additional items required are a 7-12 VAC transformer, a circuit

CABINETS

Great for Clocks or any LED

Digital project. Clear-Red

MOLDED PLUG TRANSFORMER 115/10 VAC (WITH CORD)

MUBILE

12/24 HR

12 VOLT AC or MODEL DC POWERED #2001

4" RED LED'S BEHIND RED FILTER LENS WITH CHROME SET TIME FROM FRONT VIA HIDDEN SWITCHES • 12/24-Hr. TIME FORMAT STYLISH CHARCOAL GRAY CASE OF MOLDED HIGH TEMP. PLASTIC

BRIDGE POWER INPUT CIRCUITRY — TWO WIRE NO POLARITY HOOK-UP
OPTIONAL CONNECTION TO BLANK DISPLAY (Use When Key Off in Car, Etc.)

TOP QUALITY PC BOARDS & COMPONENTS - EXCELLENT INSTRUCTIONS
MOUNTING BRACKET INCLUDED

3 OR \$2795 Power Pack \$250 MORE \$2795 #AC-1

ASSEMBLED UNITS WIRED & TESTED ORDER #2001 WT (LESS 9V. BATTERY) 4395
WIRED FOR 12 HR. OP. IF NOT SPECIFIED OTHERWISE

3 OR \$3795

JUMBO DIGIT CLOCK

KEYBOARD # FF-21360 2-1/4"x3"

thick

\$4.95 6/*28.

or Clock-Calendar Kits to operate from 12V DC. 1"x2"PC Board Power Reg: 5-15V (2.5 MA. TYP.) Easy 3 wire hookup Accuracy: ± 2PPM #TB-1 (Adjustable) Complete Kit \$495

60 HZ.

XTAL TIME BASE Will enable

Digital Clock Kits

900 S

Wir & Cal \$9.95

25 AMP BRIDGE \$1.95 ea. 3/\$5.00

OP AMPS

3/\$1.00

3/\$1.00 301 TO-5 709 DIP 709 TO 5 741 DIP 741 M-DIP 741 TO-5 747 TO 5

DISCRETE

LED's

JUMBO RED

10 FOR \$1.00 00 FOR \$9.50

PC TRIM

POTS

25K 6/\$1.00 4.7K 6/\$1.00

SPECTROL 10K 10 TURN

CMOS

4001 \$.20

95c 4/\$3.00

The state of the s

\$95 QTY. 12 ea OR MORE 3-Transistors Switches -Capacitors -Kit #850-4 will furnish a complete set of clock components as listed Chiodes --

5-Diodes Plassistors The only additional items required 24-Moles plas board and a cabinet. If desired."
PRINTED CIRCUIT BOARD FOR KIT #850-4, SCREEN PRINTED

DRILLED AND SOLDER PLATED FIBERGLASS \$2.95
MINI-BRITE RED LED'S (FOR COLON IN CLOCK DISPLAY) ... Pkg. of 5-\$1.00 NOTE: Entire Clock may be assembled on one PC Board or Board may be cut to remote display.

10:05 Chassis serves as Bezel to increase contrast of digital CABINET I displays

3"H,6%"W,5%"D Black, White or CABINET II

116

PLEXIGLAS

Clear Cover

\$6.50 ea 2½"H,5"W,4"D RED OR GREY PLEXIGLAS FOR DIGITAL BEZELS

95° ea. 4/3

SEE THE WORKS Clock Kit Clear Plexiglas Stand

e6Big .4" digits 12 or 24 hr. time a3 set switches Plug transformer eall parts included

Plexiglas is Pre-cut & drilled Kit #850-4 CP

Size: 6"H,41/3"W,3"D

*2350 2/*45.

ASUPER CLOCK!

23 45 08

JUMBO DIGIT \$ 9.95 ea.

WITH PC Board's

HOTTKY T
74S00 \$.35
74S01 .40
74S04 .55
74S05 .60
74S09 .55
74S10 .40
74S20 .50
74S20 .50
74S20 .50
74S20 .45
74S26 .45
74S26 .85
74S26 .85
74S26 .85
74S26 .85
74S27 .85
74S28 .55

74S20 74S20 74S40 74S51 74S61 74S60 74S74 74S78 74S78 74S13 74S113 74S113 74S113 74S113 74S133 74S155 74S157 74S157 74S157 74S158 74S157 74S158 74S15

74S251

DIGITAL CLOCK IC's

MM 5312 \$ 4.95 MM 5314 3.95

MM 5375 AB 3.95

LED DRIVERS

7.95 13.95

2.50

CT-7001 CT-7002

MM 5369

75491 75492

.95 .95 .95 .75 .75 1.75 1.95 1.95 1.95 2.50 2.50 2.75 2.75

CONVERSION KIT Convert small digit LED clock to arge 5" displays. Kit includes 6 LED's, Multiplex PC Board & easy

A complete Kit (less Cabinet) featuring: six .5" digits. MM5314 IC 12/24 Hr. time, 50/60 HZ. Plug-Transformer, Line Cord, Switches, and all Parts. (Ideal Fit in Cabinet II) Kit #5314-5 ··· *1995 2/*38.

hook-up info. Kit # JD-1CC For common Cathode Kit # JD-1CA for common Anode

95H90

7805 7812

1702

PINS

PRESCALE

11C90DC \$15.95 05H90 9.95

VOLTAGE

TAB TAB TO-3

TAB TO-5 TO-3 DIP TO-5

PROM

1702 E Prom \$8.95 5203 E Prom \$8.95

SPECIAL IC'S

IC SOCKETS

YTAI

PINS

Reel of 1000

master charge

\$**9**95

5.242880 MHZ. \$4.95 3.579545 MHZ. \$1.95

100 for \$1.25

\$12.50 \$ 9.95

7207A INTERSIL 5 7208 INTERSIL

7208 IN ... 7208 IN ... MC14553 MOT MC14410 MOT 2513 SIG

TRANSISTORS

DIODES

5/\$1.00 5/\$1.00 5/\$1.00 5/\$1.00 5/\$1.00 5/\$1.00 5/\$1.00 2/\$1.00 2/\$1.00

TO-18 TO-98 TO-92 TO-92 TO-92 TO-92 TO-92 TO-92 PUT N J-Fet N2222 A

REGULATORS LM 309 H TO-5 \$.95 LM 309 K TO-3 1.25 .95 1.25 1.50 1.25 1.25 .75 1.25 .75 .75

LINEAR

555 TIMER 556 DUALTIMER 565 PLL 566 FUNCTION GEN. 567 TONE DECODER

TRANSISTOR SOCKET TO-5/18 GOLD PINS

7-SEG

COMMON CATHODE

COLORHT DEC PT.PR EA FND-359 RED 4" RHDP \$ 95 FND-903 RED 5" RHDP \$1.35 DL-750 RED 6" LHDP \$2.95 XAN-654 GREEN 6" NDP \$1.95 XAN-664 RED 6" NDP \$1.95

COMMON ANODE

OL-747 RED .6" LHDP \$1.95 (AN-72 RED .3" LHDP \$1.25 \$1.25 \$1.75 \$1.50 \$1.50 \$1.95 MAN-72 RED .3" LHDP XAN-81 YELLOW.3" RHDP XAN-351 GREEN .3" RHDP XAN-3620RANGE.3" LHDP XAN-682 RED XAN-662 RED XAN-692 RED .6" NDP

4002 4010 .40 4011 4015 .95 4016 40 .20 4025 4027 .40 .85 .35 .75 4028 4042

60

40

4044

4046 4049 1.75

ORDER BY PHONE OR MAIL COD ORDERS WELCOME Orders Under \$15 Add \$1.00 Handling Fla. Res. Please Add 4% Sales Tax.

NEW LSI TECHNOLOGY

FREQUENCY COUNTER KIT 8 LARGE .4" RED LED DIGITS

Kit #FC-50 . 8 IC's . XTAL TIME BASE truly "State of the Art" counter using quality components throughout.

KIT INCLUDES: DETAILED INSTRUCTIONS, XTAL, TOP QUALITY FIBERGLASS DOUBLE SIDED PC BOARD, IC'S WITH SOCKETS AND ALL PARTS LESS POWER SUPPLY AND CABINET.

50 MHZ COUNTER KIT

AUTO BURGLAR

AN EASY TO ASSEMBLE AND EASY TO INSTALL ALARM PROVIDING MANY FEATURES NOT NORMALLY FOUND. KEYLESS ALARM HAS PROVISION FOR POS. & GROUNDING SWITCHES OR SENSORS. WILL PULSE HORN RELAY AT 1HZ RATE OR DRIVE SIREN. HIT PROVIDES PROGRAMMABLE TIME DELAYS MOUNTS UNDER DASH - REMOTE SWITCH CAN BE MOUNTED WHERE DESIRED. CONSTRUCTION OF THE CONTROL OF THE CONT

#FC-50 \$6995

KIT#ALR-1

#ALR-1WT

WIRED &

TESTED

\$9.95

\$19.95

5 VOLT REGULATED 1 AMP POWER SUPPLY KIT #PS-02 \$9.95 350 MHZ PRESCALER KIT #PSL-350 23.95 650 MHZ PRESCALER KIT CABINET [& MTG HARDWARE] #PSL-650 \$29.95 \$19.95 #CAB III [CABINET WILL HOUSE #FC-50, #PS-02, AND A PRESCALERI

Fairchild Super Digit FND-359

.4" Char. Ht. 7 segment LED RED Com. Cath. Direct pin replacement for popular FND-70.

95≠ ea, 10/\$8.50 100/\$79.00

SET OF 6 FND-359 WITH MULTIPLEX PC BOARD \$6.95

NYLON WIRE TIES 8" TIE-WRAP 100/\$1.95 4" TIE-WRAP 100/\$1.75

PILIG TRANSFORMERS

12 VAC at 150 MA \$ 2.50 12 VAC at 500 MA 3.50

7VAC at 1.75 VA \$3.50

SHORT CIRCUIT PROOF 723 IC REGULATOR 2N3055 PASS TRANSISTOR

VARIABLE REGULATED 1 AMP POWER SUPPLY KIT

KIT IS COMPLETE INCLUDING DRILLED & SOLDER PLATED FIBERGLASS PC BOARD AND ALL PARTS (Less TRANS-FORMER) KIT#PS-01 \$8.95 TRANSFORMER 24V CT will provide 300MA at 12V and

VARIABLE FROM 4 to 14V

CURRENT LIMITING AT 1 Amp



OPTOELECTRONICS. IN

1 Amp at 5V.

BOX 219 • HOLLYWOOD, FLA. 33022 • (305) 921-2056

WE PAY ALL SHIPPING IN CONTINENTAL USA - OTHERS ADD 5% [10% FOR AIRMAIL] SEE OUR BOOTHS AT THE ATLANTA HAMFESTIVAL - JUNE 18-19. 1977

computer display terminal

This display terminal has an integral controller B/W cathode ray rube and keyboard. The system has a serial I/O interface for communication and I/O interface for a printer.

External logic & power pack not shown.

DISPLAY (P/N 4802-1095-501) FEATURES:

- 17" B/W CRT
- 41 lines of data
- 52 characters per line
- Characters are generated by a diode matrix "graphic" technique
- 21 special push-buttons wired for a program call up
- Brightness Control
- Self-contained power supply

KEYBOARD (P/N 4802-1115-501) FEATURES:

- Reed switch technology
- 54 data keys
- 28 special keys detachable with cable

LOGIC UNIT (P/N 4802-1157-502) FEATURES:

- 1024 by 6 bit core memory
- Printer I/O interface
- Communication I/O interface

POWER: 115V, 50/60 Hz, 500 Watts

WEIGHT: 210 lbs. (including logic unit, keyboard, display and cables.)

FOB LYNN MASS (you pay shipping)
Check with order please.



4 way cursor control, graphics display.

The story: These are unused terminals made for airport ticketing & seat assignment. After several years of storage they require tinkering to make operable. We have some hints printed such as cleaning PC fingers. One of our customers has this tied into his KIM-1, another has his running with his IMSAI. We have data on this. Should be useable on most common computers. A hell of a deal and all for a paltry \$180.00. Don't be left out as many were on our past VIATRON deal. Sold "as is" all sales final.

WITH COMPLETE DOCUMENTATION


SPECTRA FLAT TWIST

50 conductor, 28 gauge, 7 strands/conductor made by Spectra. Two conductors are paired & twisted and the flat ribbon made up of 25 pairs to give total of 50 conductor. May be peeled off in pairs if desired. Made twisted to cut down on "cross talk." Ideal for sandwiching PC boards allowing flexibility and working on both sides of the boards. Cost originally \$13.00/ft

SP-324-A \$1.00/ft.

10 ft/\$9.00

SP-234-A SP-234-B \$1.00 ft 50 cond. .90 ft 32 cond.



10 ft/\$9.00 10 ft/\$8.00


WIRE WRAP WIRE

TEFZEL blue #30 Reg. price \$13.28/100 ft. Our price 100 ft \$2.00; 500 ft \$7.50.

MULTI COLORED SPECTRA WIRE

Footage 10' 50' 100' 8 Cond. #24 \$2.50 9.00 15.00 12 " 22 3.00 11.00 18.00 14 " 22 3.50 13.00 21.00 29 " 22 7.50 28.00 45.00

Great savings as these are about 1/4 book prices. All fresh & new.



Precision 16 pin DIP network as shown. Each resistor 1K. For pull-up/pull-down interface networks. Value over \$1.00 each; New, CTS or Beckman

SP-320 pack of 6

\$1.00



TINY SWITCH
TELEDYNE
In tall TO-5 can

DPDT, 24 volts. Brand new. cost \$16.00 each SP-134 \$3.00 each 2/\$5.00

Meshna

Please add shipping cost on above. Minimum order \$10
FREE CATALOG SP-9 NOW READY

P.O. Box 62K, E. Lynn, Massachusetts 01904

M-2



COMPUTER GRADE CASSETTES

These cassettes were custom made for one of the leading manufacturers of computers and calculators, and are excess to his present needs. (Their name is moulded on each cassette), They run about 5 minutes per side, which is ideal for most programming.

10/6.00

STOCK NO.5504K

75 ea.


3/2.00

100/55.00

VIDEOCUBE TV INTERFACE



The VIDEOCUBE is a fully self contained RF oscillator, modulator, and selection switch, which allows easy interface with any video device to the RF input of a standard T.V. receiver.



The drive to the VIDEOCUBE can be any type of standard digital logic (CMOS TTL' Etc.) or any linear device. The VIDEOCUBE meets FCC requirements for this type of device. Thus it is possible to use your TV set as a video monitor for your computer output, or camera output, The VIDEOCUBE is available in complete and kit form. All required data for use and assembly are provided. Also finds use in TV games.

STOCK NO.5499K TESTED VIDEOCUBE 13.95 2/26.00 STOCK NO.5500K VIDEOCUBE kit. 9.95 2/18.00

TONE GENERATOR CHIPS

MICROELECTRONIC TONE GENERATORS, are hybrid chips which generate 4 high frequency tones, and 4 low frequency tones, which are the frequencies used in telephone systems to generate the tone on the touch tone keyboard. (1 high and 1 low frequency for each tone). Operates from 4.5 to 35 volts. We provide 4 pages of data and applications. Usefull for touch tone applications in phone systems, repeater control, computer input etc. We provide MOLEX socket with this chip. Distributor price is in excess of \$12.00 STOCK NO.1010K \$6.95 ea. 2/13.00



16 KEY TOUCH TONE PAD

TOUCHTONE pad made for RAYTHEON. 16 SPST switches, with one common terminal. Terminals fit MOLEX strip, 3" square. Individually packed, with data. Computer, telephone and repeater use. STOCK NO.5488K \$6.95 ea. 2/12.00 One 5488K pad, and one tone chip 1010K above \$12.00

HEAVY DUTY POWER SUPPLY 'juice for an entire system'

In the Aril issue of KILOBAUD, there appeared an article by William Cattey, entitled 'HEAVY DUTY POWER SUPPLY', juice for an entire system.. This supply was designed for use as a bus power supply for ALTAIR "Hobby 1", and similar mini computers. The transformer used was the DELTA K9906 @ \$8.95. We have this transformer in stock, plus all the other necessary parts listed for this power supply. We can supply the entire list of parts, as shown in the April issue of KILOBAUD, plus a reprint of the entire article, for \$25.00

STOCK NO.K9906. Power transformer, \$8.95, 2/16.00

STOCK NO.K9906KIT, Complete kit, including power transformer \$25.00 2/47.00

FERRO-RESONANT TRANSFORMERS

FERRO—RESONANT TRANSFORMERS are a special breed of transformer. They have a special winding, and have a capacitor that resonates with this winding at the line frequency. This has the effect of stabilizing the primary, that is, when the transformer is designed for a 115 volt input, any voltage from about 85 volts to 135 volts, does not change the output voltage. In effect, it is a primary voltage regulator. The transformers listed below, are all FERRO—RESONANT, and are all heavy duty transformers, all designed for use in computers, and are exceptional bargains, having a normal price from \$50.00 to \$75.00 each. We supply the resonating capacitor and data sheets with each transformer.

Isolation winding and 2 tapped secondaries. Secondary 1 has 2 taps, and delivers either 11 V or 14 V. at 10 Amps. Secondary 2 has 5 taps, and delivers 5, 7, 12, 14, or 18 volts at 14 Amps. More than 1 tap may be used, providing the total current does not exceed 14 Amps. Isolation winding is rated at 150 VA. We provide the resonating capacitor and data. A truly versatile transformer.

STOCK NO. F6452 with data and resonating capcitor 22 lbs. \$19.95 2/37.50

Isolation winding plus 4 tapped windings. Secondary 1. 10 or 12 volts at 4 Amps. Secondary 2. 9 or 11 volts at 4 Amps. Secondaries 3 and 4, 20 or 22 volts at 2 amps. Secondaries 3 and 4 can be put in series to get 40 44 volts center tapped at 2 Amps. Isolation winding rated at 150 VA

STOCK NO.F 6436 53/4×51/4×31/4. Wt 9 lbs. \$8.95 ea. 2/17.00

Isolation winding and 4 tapped windings. Secondary 122 or 26 volts @ 2 Amps. Secondary 2, 17 or 21 volts @ 6 Amps. Secondary 3, 12½ or 14 volts @ 6 Amps. Secondary 4 32 or 35 volts @2.5 Amps. Isolation winding rated @ 150 VA.

STOCK NO.F6437 $5^{3}/4 \times 5^{1}/4 \times 3^{1}/2$. Wt. 10 lbs. With data and capacitor \$9.95 ea. 2/18.00

Isolation winding and 3 tapped windings. Secondary 1, 10 or 12 volts @ 4 Amps. Secondary 2,11 or 12 volts 8 Amps. Secondary 3, 22, 23, or 24 volts @ 5 Amps. Isolation winding is rated at 200 VA.

STOCK NO'F6468 5X3\(^4\)x4. Wt. 11 lbs. With data and capacitor. \$10.95 2/20.00

VISIT our 2 new retail outlets: DELTA ELECTRONIC HOBBIES, 5151 Buford Hwy. Doraville, (Atlanta) Ga. and DELTA ELECTRONICS, 590 Commonwealth Ave. Boston, Mass.



DELTA ELECTRONICS CO.

Phone (617) 388—4705





MINIMUM ORDER \$5.00. Include sufficient postage, excess refunded. Send for new Catalog 18, bigger than ever.


BANKAMERICARD and MASTERCHARGE now accepted, minimum charge \$15.00. Please include all numbers. Phone orders accepted.

D13

Introducing! The World's Cheapest Computer

...a \$60 SC/MP

Photos by Bob Fitch

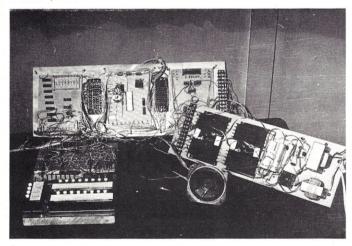

The complete \$60 computer. In the background is the mainframe with memory board and display LEDs on the left, a terminal strip, CPU board with SCAMP chip next to a circuit added for music production in the center, another terminal strip, and on the right an extra perf board with a seven-segment calculator readout assembly which we never hooked up. On the right side of the picture is the power supply, including two voltage regulators mounted on heat sinks (which probably are not needed) and the output peripheral device for music production. In the left foreground is the keyboard — control circuit (version two) with 20 pushbuttons and mass of surplus relays. Your version doesn't have to look this messy.

Although Rich and his family built their SC/MP for the purpose of getting familar with computer hardware and programming, I think it would be a good idea to also look at what they've done with an eye toward an inexpensive microprocessor controller. (And to get any lower than \$60 is going to take some doing!) — John.

here are many different levels of cost at which you can enter the computing hobby. If you have lots of money and enjoy spending it, you can buy an Altair, Imsai or et cetera system and interface it with, say, the Intecolor terminal, floppy disks and so on, run in a BASIC compiler and then have a lot of fun with it. If your wallet

is a little bit tighter, you can buy a one-board system such as an MOS Technology 6502 processor and have just as much fun with that. If even that is not within your budget (or you're like me, trying to do everything absolutely as inexpensively as possible) then there is still an alternative for you — a complete computing system that you can build for very close to \$60.00.

This article describes the computer which my father and I have built at a cost of less than sixty dollars. It is based on National Semiconductor's SC/MP microprocessor chip, which I chose for its low cost and ease of interfacing. You should realize that you only get what you pay for; the SC/MP is at least ten times slower than an

8080 and is less efficient in terms of memory space by virtue of its smaller instruction set. I have kept in mind that my SC/MP will still be useful if and when I move up to a better computer system; the SCAMP would make a dandy I/O controller, interrupt handler, keyboard decoder or whatever. Right now, though, it has proven to be an excellent low-cost method to get into the home computing hobby.

Objectives

Our objectives were to put together a small, but complete computer system which could run small programs and interface to simple input/ output devices, all without spending nonessential dollars. We are using a set of pushbuttons to enter programs and data into the memory, with eight discrete LEDs for verification of input and data output. This summer I had a BAUDOT Teletype interfaced with the system; it now plays tunes through a three-inch speaker. I think that we have met our objectives and have had a lot of fun in the process.

Construction

Before we get deep into schematics and waveforms, let me present a price list for you so you can see what you will need and what it costs; see Table 1. This includes everything that we could see except the wire to hook it together and the scraps of pine board to mount it on.

Some general construction notes: We wired everything on three perf boards, using perf board pins for all boardedge terminations. We used a socket for the SCAMP; all other ICs were soldered right in. The version we put together uses a double handful of reed-type relays instead of the DM7400s for the keyboard control circuit; I have provided the solid-state "version three," using more standard parts, for this article.

We decided that it would be impractical to describe the




Fig. 1. CPU Board. Pins which are not shown are unused but they may be brought out to perf board pins for experimentation.

workings of every little circuit; if you are seriously interested in building one of these, you should acquire an *SC/MP Technical Description* from National (publication number 4200079A; National Semiconductor Corporation, 2900 Semiconductor Drive, Santa Clara, California 95051). This explains how the chip operates as well as the program instruction set.

They also have other worthwhile literature.

You can probably do better with a different memory chip; 2102-1s are 300% larger and only 25% more expensive from PolyPaks. Your memory interface circuit is likely to be somewhat different in this case. If you're not a whiz at reading memory data sheets get a friend to help.

You might want to throw in some extra despiking capacitors on each power supply connection on each board. My original version, running with the Teletype this summer, did not have these. When I left for school in September, my father rewired the system a little bit and added the capacitors.

OK, now let's discuss the schematics and go over brief descriptions of each of the circuit boards as we built them.

The CPU Board (see Fig. 1) contains the SC/MP chip and two ICs (one 7400 and one 7404) to control it and interface it to the memory. Table 2 contains a description of each of the most important pins on the SC/MP. It wouldn't be a bad idea to provide a perfboard pin for each pin of the SCAMP chip in case you want to do some experimenting with the inputs and outputs not used here. Again, we used a 40-pin socket for the SCAMP chip itself.

The Memory Board (see Fig. 2) is somewhat more

			Unit	
Quantity	Item	Source	Price	
1	SC/MP chip	Order #ISP-8A-500D		
		from a National		
		dealer	\$17.76	
		+ shipping	2.00	\$19.76
8	MM1101 memory	PolyPaks	95¢	7.60
9	DM7400	PolyPaks	14¢	1.26
6	DM7403	PolyPaks	14¢	.84
2	DM7406	PolyPaks	20¢	.40
8	MV-50 LEDs	PolyPaks	8¢	.64
1	7805 3-terminal			
	regulator	Radio Shack	\$1.59	1.59
1	7812 regulator	Radio Shack	\$1.59	1.59
2	bridge rectifier	Radio Shack	\$1.39	2.78
10	1N914 diodes	Radio Shack	10/\$1.00	1.00
1	6.3 V 1.2 A			
	transformer	Radio Shack		1.99
1	12.6 V 1.2 A			
	transformer	Radio Shack		2.69
17	assrt'd resistors			1.66
2	1000 uF 35 V cap.	Radio Shack	\$1.19	2.38
2	.022 uF disc cap.	Radio Shack	2/49¢	.49
1	.001 uF disc cap.	Radio Shack	2/25¢	.25
20	SPST pushbuttons	Radio Shack	5/\$1.89	7.56
3	SPDT switches	Radio Shack	\$1.19	3.57
1	40-pin socket	Radio Shack		1.69
3	perfboards	Radio Shack	\$1.29	3.87
100	perfboard pins	Radio Shack		1.89
			Total Price	\$65.50

Table 1. Parts list with prices.

complex. Since I purchased the memory over the summer, I bought MM1101s which were fairly cheap at the time. You can do better presently using larger 1K static chips. The circuit should be basically the same, but watch out for slightly different control methods,

such as on the Read/Write pin. Also check Output Sink Current: for the 1101 it is 8 mA, which is just enough to drive the LEDs. For another memory you may need to buffer the LEDs with an extra pair of 7400s. (Doing this has another advantage: in my circuit, a 0 is an ON LED,




Fig. 2. Memory Board. One eighth of the circuit is shown for simplicity. The pins drawn on the lefthand side of the 1101 are wired identically for each chip. The ones on the right must be wired separately for Data Bus 0 through Data Bus 7.

and a 1 is an OFF LED. A set of inverting buffers would correct this, but remember — extra dollars.) If the memory you use is larger, you will also have to wire a few more address lines and control buttons.

The purpose of the DM7403s in this circuit is to disable data from the memory output leads during WRITE cycles. When the SC/MP wants to read data from memory, it sends a low out on its NRDS pin which is inverted to a high and enables the 7403 gates. This allows read data to transfer from the memory to the SCAMP. At other times (when the SCAMP is writing data to memory) the NRDS line is high and the 7403s are turned off.

The SC/MP requires +5 and -7 volts; the 1101s require +5 and -9 volts. I skimped a little and used -7 for both; the circuit is shown

in Fig. 3. The easiest way to get the necessary voltages was to build what amounted to two separate supplies, one for 5V dc and the other for 12V dc. The positive leads of the two supplies are wired together: the negative side of the 5V supply is ground and the negative side of the 12V supply is -7V. Both supplies take advantage of the 3-terminal regulators that are available (and have done a lot toward making power supply design easier).

The Keyboard and Control Circuit was originally constructed using 16 SPDT center-off switches for entering data and addresses into my machine. Those switches were expensive and tiresome though, so my Dad replaced the circuit with a configuration of surplus reed relays. Fig. 4 is the solid state answer to the "problem." (The price list in Table 1 is based on using Fig. 4.) R/S flip-flops are used to hold data ones set by the pushbuttons; the release button resets them all back to zero.

The purpose of the DM7403s in Fig. 4 is about the same as on the memory board. They allow the keyboard to send out data when the keyboard is turned on, and they lock out the data from the keyboard when it is turned off so the computer can send data back and forth without interference from the keyboard.

Operation

Operating the SC/MP system is about as simple as the circuit itself. The sequence for keying in a program and running it looks like this:

- 1. Turn the "start/stop" switch to "stop" and the "reset" switch to "reset."
- 2. Flip the "keyboard" switch to "on."
- 3. Push the "release" button.
- 4. Key in your first address and the data or program instruction you wish to put there, pushing a button wherever you want a "one."

Pin No.	Name	Function
20	Vss	+5V
40	Vgg	-7V
2	NRDS	The SC/MP sends out a zero on NRDS when it wants to read data from memory.
1	NWDS	The SC/MP sends out a zero on NWDS when it wants to write data into memory.
9-16	DB0-DB7	The data bus. When NRDS is low, these lines handle read data and act as inputs. When NWDS is low, they send data and act as outputs. At most other times, they are in
		a high-impedance "off" state.
25-36	AD00-AD11	The address bus. The address tells the memory where to send data from or where to store data. When not in use these too are in a high-impedance "off"
8	CONT	when this input is high, the computer runs normally. When it is low, it stops and "holds everything."
7	NRST	When this input is high the computer runs normally. When it is low, the computer stops and resets all its internal registers to zero.
37,38	X1,X2	These are provided to hook a frequency-determining element (a crystal or a capacitor) to.
3	ENIN	dapatitot/ to:
5	BREQ	ENIN and BREQ are used for running two or more SC/MPs together. When using only one SC/MP, they should be hooked up as shown in Fig. 1. See the SC/MP Technical Description for details.

Table 2. Descriptions of the pins of the SC/MP chip used in the system described in this article. For more details and other pins, see SC/MP Technical Description.

RONDURE COMPANY

NEW ADDRESS

2522 BUTLER DALLAS, TEXAS 75235 Phone: (214) 630-4621

the computer roo

Where We Ship from Inventory the Same Day Your Order Arrives*

A SELECTRIC TERMINAL COMPLETE WITH RS-232/C INTERFACE AND CERTIFIED FOR MAINTENANCE BY A NATIONAL SERVICE COMPANY.



offered. Shipped the same day as certified check or money order arrives. When regular checks accompany order, equipment is shipped when regular check

Specifications


- \square Size: 21" wide x 21" deep x 8" high.
- □ Power Input: 115 Volt, 60 Hz.
- ☐ Mounting: Tabletop.
- ☐ Interface: RS232C. (BCD code)
- □ Weight: 54 lbs.
- Documentation \$20 with unit.
- ASCII conversion available.
- Shipping collect

We have a large inventory of parts. Please write for catalog.

12" MOTOROLA MONITOR (15 MHz Bandwidth, 800 LINE PRINTERS — USEC -- 480 1pm \$995.00

CARTERFONE MODEL 318

TERMS: Check or Money Order. Add \$2.00 shipping and handling per modem. All others shipping packaging and shipping collect.





HARD WIRE

- TTY OR RS-232B INTERFACE
- ORIGINATE ONLY
- UP TO 300 BPS

USED - UNTESTED ..\$25.00 USED - TESTED \$80.00

We ship prints with these.

ACCOUSTICAL MODEMS - ORIGINATE ONLY USED - UNTESTED

Physically fit into Model 33 Teletype. Manufactured by

Paragon partial documentation 2 for \$25

ACCOUSTICAL MODEMS -ORIGINATE ONLY USED -UNTESTED

\$20.00 ea. 2 for \$35

NO EQUIPMENT INCLUDES PRINTS OR DOCUMENTATION (unless stated).

> NO CONNECTING CORDS OR CONNECTORS.

RONDURE 2522 BUTLER

COMPANY DALLAS, TEXAS 75235 PHONE: (214) 630-4621





The author does a little programming, entering data in binary form. The author does this as little as possible (Please don't unplug my computer!).

- 5. Push the "write" button.
- 6. Repeat steps 3, 4, and 5, moving on to the next address each time until you are finished.
- 7. Flip the keyboard switch to "off."
- 8. Flip the "reset" switch to "run."
- 9. Flip the "start/stop" switch to "start."

And that's it. If you wish to stop in the middle of a program and check something, just flip the "start/stop" switch to "stop." If you want to go back to address one, clear all registers and start over, flip the "reset" switch to "reset" and back to "run."

By the way, we leave the computer turned on when we have a program in it. It's been on for a few weeks now. The power plug is the on/off switch.

Programming

The degree of difficulty you will have programming the SC/MP depends on your level of experience. (I had no experience; therefore I had no difficulty!) In any case, don't be afraid to try it. For details on the instruction set see National's literature. Here are a few hints:

1. If you add or subtract anything, watch out for the

carry link! If you forget about it, you will find (or possibly you won't — I almost didn't, and it nearly drove me crazy) extra "ones" being added to your result that were left over from previous additions. Use the CCL (clear carry link) instruction.

- 2. If you use more than 4K of memory you will have to get fancy with your addressing (not to mention your hardware.) National's literature explains it.
- 3. Figuring out address displacements is not too hard after you do it a few times. the SC/MP figures out an address according to the formula:


Address=Contents of Pointer +Address Displacement

Therefore, you can figure out your displacement by the formula:

Displacement=Address-Pointer

In the case of a Jump-type instruction, the SC/MP will compute the address and execute the next instruction *after* that. To compensate for this, subtract an extra 1 from your displacement.

Remember too that the displacement can be negative: the SC/MP works in *two's complement* binary notation. This means, to find the negative of a number, complement it (switch ones and zeroes) and add an extra one (see Example 1).

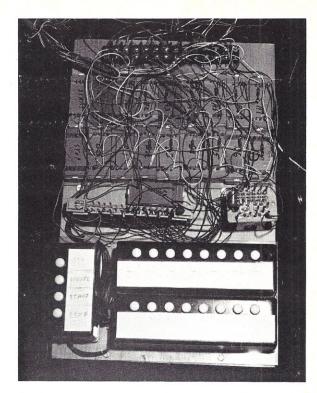

Detail of keyboard — control circuit, version two. Buttons on left are labeled "Release," "Write," "Start," and "Stop." Buttons on right are labeled "Address 0-7" and "Data 0-7." See text for details.




Fig. 3. Power Supply. Provides +5V dc and -7V dc. See Fig. 4 for simplified block diagram.




Fig. 4. Keyboard Control Circuit, version 3. This diagram shows one of sixteen identical circuits. This version was used in the price list.

 $\begin{array}{l} {\rm Example:~47=00101111_{tw0}} \\ {\rm the~complement~is~11010000_{tw0}} \\ {\rm adding~one,~the~two's~complement~is~11010001_{tw0}} \\ {\rm -47=11010001_{tw0}} \end{array}$

Example 1.



DIP PLUGS AND COVERS

Use for mounting diodes, resistors, jumpers, etc Gold plated parts for long wear.

***********		PLUGS		CO	VERS
	1-24	25-49	50-99	1-24	25-99
8 pin	.46	.39	.32	.10	.09
14 pin	.48	.40	.34	.10	.09
16 pin	.56	. 47	.38	.10	.09
24 pin	.79	.72	.65	.15	.13
40 pin	\$1.23	\$1.08	.93	.25	.22



DIP PLUG INTERCONNECTS

Ideal for use from board to board, remote switches, in test equipment, lamp panels, etc. Made from gold plated connectors, color coded ribbon cable, molded plugs. Very flexible and durable.

To order, make up part number from characteristic and find price in chart. For instance: S-14P-18 is single ended 14 pin interconnect 18 inches in length. Price is \$1.72. D-24P-06 is double ended 24 pin, 6 inches in length. Price is \$4.55. Quantity pricing is available.

PRICE CI	HARTS.	SINGL	E END			
No Of Pins			L	ength		
	6"	12"	18"	24"	36"	2,26
14P ••••	1.51	1.62	1.72	1.83	2.05	2,26
16P · · ·	1.64	1.76	1.87	1.99	2.21	2:44
24P · · ·	2.49	2.69	2.88	3.08	3.48	3.87
		DOUB	LE END)		
14P · · · ·	2.76	2.87	2.97	3.08	3.30	3.51
16P ····	3.01	3.13	3.24	3.36	3.58	3,81
24P · · · ·	4.55	4.75	4.94	5.14	5.54	5.93
	Sec. 03.145.00		10 P. W. 10 P. 10			



PRESTRIPPED WIRE WRAP WIRE

Highest quality 30 ga. Kynar insulated silver plated wire for rightest quality 30 ga. Nynar insulated silver plated wire for wrapping. Stripped 1" on both ends. Indicated lengths are lengths of insulated portion. Packed 100 per sturdy plastic vial or 1000 per poly bag. Compare our prices!!!. Available in Black, Red, Yellow and Green. State color desired.


Length	Price per tube of 100	Price per bag of 1000
1"	\$1.48 (WW30VC-1)	\$11.84 (#WW30BK-1)
2."	\$1.60 (WW30VC-2)	\$12.80 (#WW30BK-2)
4"	\$1.85 (WW30VC-4)	\$14.80 (#WW30BK-4)
6"	\$2.20 (WW30VC-6)	\$17.60 (#WW30BK-6)
Dealer In	quiry Invited	

ROLLS OF WIRE SAME AS ABOVE (30 ga. KYNAR) 100ft Roll in poly bag...\$3.45 10 Rolls, mixed...\$24.00

WIRE WRAP I.C. SOCKETS, 3 LEVEL GOLD 14 pin 38¢ ea, 10 for \$3.60 16 pin 42¢ ea, 10 for \$3.90



	C II AUEU	C NIDWII
Contract Cancellation	SpecialsAll Full	
SN749039¢	2N373438¢	2N3773 \$1.75
LM320H-12\$1.29	2N586175¢	2N44015/\$1
1N5231A 25¢	1N357290¢	2N44035/\$1
1N5226B 35c	G.E.D45C5 44¢	2N1557\$1.39
741 (mini-dip3/\$1	50V, 3Amp Epoxy	Bridge 79¢



78HGKC 5A VARIABLE REGULATOR
NOW- at last, a high current adjustable regulator.
Same simple circuitry as the popular 78GKC. Needs
only two external resistors to program to any volt-
age between +5 and 30V @ 5A output.
78HGKC\$13.95
Spec

NEW BOOK

NEW BOOK FROM NATIONAL

MOS LSI. Giant data book filled with spec and apps on large scale MOS circuits from National Semiconductor Corporation Price includes shipping in U.S. only...\$4.25 Outside U.S., add postage for 2 lbs.





PROFESSIONAL TEMPLAT	TES-LOGIC SYMBOLS-Stand MIL806-B
3/4 Size	\$3.50
1/2 Size(Handy	shirt pocket size)\$3.25
Computer Flow Chart	Symbols\$3.50

Fast Signal Diode

115V VR 100mA If. Reverse recovery time is less than 20 nS at 100mA forward! 6 pf cap. Same size as 1N914, 1N4148. D600..................20/\$1

TO-5 Heat Sink。 THERMALLOY 2211B 2-piece black anodized for maximum heat dissipation. HS2211B. 5/\$1

6.8V,	50Watt	Zener.	Made	by M	otorola	in 1	0-3	
case.	Gold	olated.	• • • • •				\$1.0	Ю
15V, 5	W 5% Ze	ner. 1	N5352B	axia1	lead	zene	r is ju	st
right	for the	se MOS	voltage	supp	lies		3/	\$1

2N4234,	40V, 3A PNP switch, TO-5 50¢	
2N2905,	40V, .6A PNP Switch/Amp. TO-55/\$1.0	0
2N2147,	50V Germanium TO-3 \$1.0	0

SIGNETICS 8000 SERIES TTL LOGIC

These quality units are faster and have greater fan-out capability than standard TTL. From a giant fac-tory change-over you get real bargain prices. All are house numbered, but we provide a reference and

The following items are available in large quantities Dealer or manufacturer inquiry is invited.
2N3414. NPN switch on reels. 10/\$1
1N753A. 6.2V, 5%, ½W Zener. 5/\$1
C106F2. 50V, 4A SCR w/socket. 3/\$1
1N96FB. 18V, 5%, ½W Zener. 5/\$1
4Z501-1 Quad Hi speed NPN transistor in 14 pin DIP
package. Similar to Motorola MPQ3303. 5/\$1

MCM6571A is an 8192-Bit Horizontal-Scan (Row select character generator with shifted characters. It contains 128 characters in a 7X9 matrix, and has the contains 1/8 characters in a 7/3 macrit, and has the capability of shifting certain characters that normally extend below the baseline, such as j,y,g,p and q. A 7-bit address code is used to select one of the characters.

Features: .Static operation

.TTL compatability .CMOS compatability (5V) .Shifted character compatability .Includes Greek alphabet

MM5320 TV SYNC GENERATOR L.C.

Generate all the sync pulses necessary for camera or video terminals. Use with MCM6571A in the TV-Computer interface. MM5320N.....\$18.80

C30-1 400	V, 25A Stud SCR\$2.25
	V, 10A Stud Triac\$1.59
Insulated St	ud 400V, 10A TRIAC assembly with built-in
diac. TRI-	133\$1.85

LM1815 ADAPTIVE SENSE AMP CHIP. Used with motor control to adapt to variable input and noise

levels. Applications include zero crossing switch, motor control, tachometers, motor testing. LM1815N.....\$5.72

1N5393 200V, 1.5A Diode. Sturdy replacement for

DATA BOOKS BY G. F.

OptoElectronics Manual. Filled with spec and applications on a wide variety of Opto devices including many new isolators and couplers. G.E. Opto Manual......\$4.25

Semiconductor Data Book . A giant book of data, cross references, applications on G.E. devices from transistors and diodes to SCRs, Triacs and power modules. Over 1400 BIG pages. Nearly 5 lbs of book!!!
G.E. Semi Conductor Data Book......\$11.95

Foreign orders add postage for 5 lbs (2.3KG) Power Transistor Users Handbook. For anyone using power

transistors and you want to know how to mount on heat sink, derate or just generally apply them right, this is the book. G.E. Power Transistor Users Book......\$3.95

COOK BOOKS" The famous Howard Sams "Cook Book" series tells you what

and how in a broad range of subjects. Probably the most widely referenced works in their fields. Prices quoted include shipping (U.S. only) TTL Cookbook......328 pages......\$9.95
Active Filter Cookbook.....223 pages......\$15.95

TV Typewriter Cookbook.....250 pages...... \$10.95

MC14411 BIT RATE GENERATOR.

Single chip for generating selectable frequencies for equip ment in data communications such as TTY, printers, CRT or microprocessors. Generates 14 different standard bit rates which are multiplied under external control to 1X, 8X, 16X or 64X initial value. Operates from single +5 Crystal for the above...... \$4.95

- Accuracy: 10.05% of Reading ±1 Count
 Two Voltage Ranges: 1.999 V and 199.9 mV
 Up to 25 Conversions/s
 Z_{In} > 1000 M ohm
 Auto-Diarrity and Auto-Zero
 Single Positive Voltage Reference
 Standard 8 Series CMOS Outputs-Drives One Low Power
 Schottky Load
 Uses On-Chip System Clock, or External Clock
 Uses On-Chip System Clock, or External Clock
 Wide Supply, Brage: e.g., ±4.5 V to ±80. V

MC14433 SINGLE CHIP 32 DIGIT A/D

Single chip combines linear and CMOS digital to bring you the simplest yet DVM approach. Requiring only 4 external passive parts, this subsystem gives you: Auto polarity, auto zero, single voltage reference, 8 mW operation, overrange, underrange signals, 25 conversions per second and .05% ± count accuracy! 100 uV resolution. 24 Pin DIP. MC14433P......\$19.55



tri-tek, inc.

6522 north 43Rd avenue, glendale, arizona 85301 phone 602 - 931-6949

We pay surface shipping on all orders over \$10 US, \$15 foreign in US funds. Please add extra for first class or air mail. Excess will be refunded. Orders under \$10, add \$1 handling. Please add 50¢ insurance. Master charge and Bank America cards welcome, (\$20 minimum). Telephone orders may be placed 10AM to 5:30PM daily, Mon thru Fri. Call 602–931–4528. Check reader service card or send stamp for our latest flyers packed with new and surplus electronic components.

A number is negative if it has a 1 in the first bit position.

If the displacement equals -128 (10000000_{two}) the contents of the extension register will be substituted for the displacement.

- 4. Figuring out delay cycles can be difficult. I will explain my method for figuring out a delay cycle, step by step.
- a. Figure out your machine cycle time. If you know the clock frequency, you can use the formula shown in Example 2.
- b. Take your desired delay time and divide it by the machine cycle time to find out the number of machine cycles you want to delay.
- c. Subtract 13 from this figure.

d. Divide that figure by 514, with remainder. The quotient is the figure that must be in the displacement (the byte following the Delay instruction).

e. Divide the remainder by two and round off. This value must be in the accumulator when the Delay instruction is processed.

Note that the two values above must be translated into straight (positive) binary instead of two's complement.

5. The SC/MP has the ability to execute a Halt instruction. It doesn't do that automatically though; an external circuit is required. This is omitted here (extra dollars) but you can add it from information given in the National literature. Or you

can just program the computer to run around in an endless loop instead of stopping; add a Delay and the lights will blink.

Well, that about wraps it up. I will do my best to answer any reasonable inquiry accompanied by an SASE. Please allow for some delay as your letter may have to be forwarded to my address at college. First, get your hands on one of those SC/MP Technical Descriptions; that contains a lot of information, including circuit and programming examples.

The only other thing I can tell you about is some of the things we have done with our system and some application ideas. Over the summer we were using a Baudot five-level Teletype machine. I didn't use a UART or anything to interface it; I just programmed the SCAMP with two subroutines that performed the same function. The machine is now pro-

grammed to play music through a little speaker; if you walk around shuffling your feet enough to build up static and then walk over and touch the keyboard you get to hear Jingle Bells.

My father is building another SCAMP computer which I think he plans to use to remote control his ham shack. (We already have another SC/MP chip.) I would like to develop a better system (perhaps based on a Z-80) and using a few SCAMPs for various purposes. Incidentally, I read somewhere that National is coming out with the SC/MP II twice as fast, one fourth the power, single five-volt supply, and cheaper!

Well, there it is. I have told you how we built our computer, what it cost, some programming hints, and what we have done with it. Now you know what you can do with an SC/MP. So if you're interested in *cheap* computing, Good Luck!

machine cycle time = $\frac{2}{\text{clock frequency}}$ Example: if clock frequency is 400,000 Hz machine cycle time = $\frac{2}{0.4 \text{ MHz}}$ = 5 usec.

Example 2.

The 1977 Atlanta HamFestival and Georgia State ARRL Convention June 18-19, 1977

Downtown Atlanta Marriott Hotel • Courtland and Cain Streets • Atlanta, GA. 30303

- GIANT Covered Fleamarket Swapshop!
- 120 major exhibits!
- More than 50 technical forums!
- Special MICROPROCESSOR Section!
- The BIGGEST door prizes in all of Ham Radio:
 First Prize is a complete 2MFM Mobile rig including a 1977 AMC Gremlin!!!

Registration: \$3.00 Individual, \$5.00 Family IN ADVANCE, \$4.00 Individual, \$6.00 Family at the door.

For Advance Registration Materials call 404/971-HAMS day or night or write to:

Atlanta HamFestival 53 Old Stone Mill Road Marietta, GA 30067

SPECIAL HAMFESTIVAL RATES: \$18 SINGLE, \$24 DOUBLE.

CONTACT THE HOTEL DIRECTLY for reservations toll free at 1-800-228-9290 — and Hurry!!

THE BEST HAMFEST IN THE WORLD!







COMPUTER' **EHOUSE**

C27

DEPT: K ● 584 COMMONWEALTH AVENUE ● BOSTON, MA ● 02215 ● 617-261-2701 9-9 WEEKDAYS: 9-6 SATURDAYS

USED PERIP

HAZELTINE 1000 \$795

VIDEO DISPLAY TERMINAL + SHIPPING 35 16 12 LINES x 80 CHAR., 5 x 7 DOT MATRIX, 525 LINE RASTER. BUILT & TESTED; PLUG & GO



ALLanASR 33 is and MORE!

OLIVETTI TE318 - BACK IN STOCK! RS232 INTERFACE, QUIET OPERATION 10 CPS, PRINTER, BUILT-IN PAPER TAPE READER/PUNCH, ELECTRIC TYPEWRITER KEYBOARD WITH ADDITIONAL 10 KEY NUMERIC PAD, YOUR CHOICE OF FRICTION \$875 OR SPROCKET FEED, LIGHTED PLATEN AREA FOR EASY READING, STANDARD PAPER AND + SHIPPING 165 16 TAPE, SUPPORTED BY OLIVETTI


TECHTRAN 4100...... \$595 + \$25 SHIPPING

TAPE CASSETTE DRIVE. CAN RUN DIRECTLY FROM TERMINAL INDEPENDENT OF CPU. FULL EDIT CAPABILITY.

KDI ADTROL AR-21...\$95 SHIPPING ELECTRO OPTICAL PAPER TAPE READER WITH 110V PS. STEP PER MOTOR, 250 CHAR/SEC, FAN IN TABLE TOP HOUSING

IBM 731 I/O WRITER \$750 + \$25 SHIPPING 81'PLATEN, PINFD, EBCDIC, U/L CASE, DUAL CLR RIBBON, 115V

CWS U-BUILD-IT SYSTEM \$599



+ \$35 SHIPPING MPU. CRT TERMINAL & AUDIO CASSETTE AT A ROCK BOTTOM PRICE !

SC/MP MICROCOMPUTER; 256 \times 8 RAM, 512 \times 8 ROM GREEN PHOSPHOR VIDEO MONITOR; 12" RASTER SCAN SWTPC 1024; 32 CHAR. x 16 LNS, ASCII KEYBOARD SWTPC AC-30 AUDIO CASSETTE INTERFACE *OTHER PACKAGE PLANS - SEND FOR OUR CATALOG

TO ORDER EQUIPMENT

1. ENCLOSE CHECK FOR FULL PRICE PLUS SHIPPING CHARGES (KITS - ADD \$5 IF UNDER \$100; \$10 IF OVER) (FOREIGN RATES HIGHER) BANKAMERICARD & MASTERCHARGE ACCEPTED -SEND CARD NUMBER, EXPIRATION DATE, INTERBANK #

2. CLEARLY IDENTIFY SHIPPING ADDRESS 3. DESCRIBE ITEM BY MODEL NUMBER

ALL MERCHANDISE WARRANTEED

A MUST FOR PERSONAL COMPUTING

SEND \$1 FOR OUR CATALOG

THE ONLY ONE OF ITS KIND! FULL DETAILS ON OUR COMPLETE LINE OF KITS & UNITS, REVIEWS OF OVER 150 BOOKS, LISTS OF NEW & SURPLUS PARTS & "ALL ABOUT HOBBY MICROCOMPUTERS" - AN INTRODUCTION TO PERSONAL COMPUTING.

SPECIAL DISCOUNTS!

SAVE UP TO 20% OFF KIT PRICE WHEN A PERIPHERAL IS PURCHASED AT THE SAME TIME. (\$200 MAXIMUM DISCOUNT)

PERIPHERAL PRICE OVER \$900 → 20% OFF KIT PERIPHERAL PRICE OVER \$250 → 10% OFF KIT PERIPHERAL PRICE OVER \$95 **→** 5% OFF KIT

GREEN PHOSPHOR \$150 +25 VIDEO MONITOR

STANDARD 1V P TO P COMPOSITE VIDEO INPUT. 16MHz BAND WIDTH, RASTER SCAN 12x12x13" WITH POWER SUPPLY, VIDEO AMPLIFIER, DRIVING CIRCUITRY VENTILATION MUFFIN FANS, 7×9" HORIZONTAL VIEWING CAPABLE OF 24 LINES x 80 CHAR., ANTIGLARE 4" ETCHED GRADIENT DENSITY FACE PLATE, P39 GREEN PHOSPHOR, ON/OFF BRIGHTNESS CONTROLS, 115Vac, 60 W ... TRULY A COMMERCIAL UNIT BUILT TO WORK IN A DEMANDING ENVIRONMENT.

SHIPPING

DATAPOINT 3300-200
THERMAL PRINTER \$375 + \$25 SHIPPING PARALLEL PRINTER WITH ADDITIONAL CIRCUIT BOARDS TO PROVIDE SERIAL INTERFACE, PRINTS UP TO 30 CPS, 100Vac PS USES WIDELY AVAILABLE
NCR PAPER, 96 CH, ASCII, 80 COL, CRT COMPATIBLE 5x7 DOT MATRIX, SOLID STATE WITH LESS THAN 25 MOVING PARTS.

DATAPOINT 2200-200 \$395 SHIPPING

CONSOLE PRINTER BOTH UNIVAC & SINGER BUILT THESE PRINTER MECHANISMS WHICH OPERATE AT 30 CPS FROM A ROTATING WHEEL. 65 CHAR. USES STANDARD FORM FEED PAPER, PINWHEEL IS INTERCHANGEABLE.

UNIVAC 0769-06 PRINTER MECHANISM ONLY INCLUDES MOTOR/PRINT WHEEL ... \$195 +SHIPPING 75 1b.

HIGHLIGHTS FROM OUR ★ WIDE SELECTION

IMSAI 8080 MICROKITS 8080A KIT 5 SLOT.....\$699 UCRI-1 KIT..... STANDARD INPUT/OUT INTERFACES, MANUALS, SOCKET SETS
VIKING 100 PIN, HEAVY DUTY.....\$3.00 SWTPC 6800....\$395

•512 BYTES of ROM •SERIAL INTERFACE
•RS232 or 20 mA •4K of RAM\$100 4K MEMORY..... MPA. 145 MPB. 40 MPC. 40 MPD. 35 MPE. 14.95 MPF. 30 MPM. 65 MPMx. 35 MPP. 35 MPL. 35 MPS. 35 MPAb. 14.50
 MPP.
 35
 MPL.
 35

 MPS.
 35
 MPAb.
 14.50

 MPMB.
 14.50
 MPCD.
 14.50

 MPCD.
 MPSb.
 MPLb.
 EACH.
 9.50

 CONNECTOR SETS INTERFACE.
 2
 2

 CONNECTOR SETS INTERFACE.
 79.50
 99

 AC30 AUDIO INTERFACE.
 79.50
 79.50

 PP40 PRINTER.
 250
 CT 1024 TERMINAL KIT.
 275

 CTP.
 15.50
 CTS.
 39.95

 ALL SWTPC UNITS ARE KITS

 SMOKE SIGNAL BROADCAST 16K RAM
 595

LEAR SIEGLER ADM-3A

W/ Cursor Control ●12" CRT ●24 LN X 80 CHAR ●RS232 ●20 mA LOOP \$875 SCAMP KIT.....\$99 FROM NATIONAL SEMICONDUCTOR
KEYBOARD KIT..... * BUILT UNITS * ICOM MICROFLOPPIES PLUG COMPATIBLE FOR: \$100 BUS...FD2411.... \$1095 SINGLE DRIVE FD2402.....\$ 649 | COM FLOPPIES: | F736-1 FRUGAL | 1095 | F736-2 DUAL FRUGAL | 2500 | F736-2 DUAL FRUGA

\$171 POWER SUPPLY ... 250 FD360-2-5 DUAL SYSTEM... 3000 KIM-16502.....\$ 245 TARBELL AUDIO CASSETTE KIT 120 INTERSIL INTERCEPT JR. \$281

My Friend is

"He remains unaware as he gropes in desperate haste for needed diskettes, or paper tapes, or cassettes, . . . "



Sheila Clarke Cybergrafix PO Box 430 Glendale CA 91206

Gather around, girls, and see if there aren't portions of Sheila's tale that you can relate to. I say "portions" because it's doubtful that your man could be anywhere near as hooked (or hopeless?) as the one in this article. — John.

remember him as a really nice guy. Lots of fun to be with. We spent hours talking late into the night, or sunny days sailing off the California coast, or weekends partying with friends. Our friendship was warm and close.

One Saturday afternoon we were sitting on the sofa just chatting quietly like friends will, about how to spend a vacation, or the next hundred bucks extra. Then he startled me with his current pipe dream ... this was the first I'd heard it. I guess, thinking back now, it was only natural to want such a thing. After all, he was a computer programmer and really into it. Among his interests were stock investment predictions that he'd like to write programs for. As I said, it was probably natural, though it took me by

surprise when he told me wistfully that what he really wanted was a computer of his very own. The little I knew about computers conjured up an image of the living room space consumed with metal boxes standing 6 feet high, banked along the wall, spouting flashes of blinking lights. So I said, "You gotta be kidding." "No," he said thoughtfully, "that's what I really want."

a Computer Junkie

Thinking he possessed the impossible dream, I promptly dismissed the notion. So I don't quite know when it all started happening. I think he'd met someone who shared his pipe dream and invited him to a meeting of a small group called the South-California Computer Society. He returned from that meeting wired for computers. But I still didn't give it much credence. Shortly after that, he ran across a magazine that advertised "a computer kit" and sent off a check for the beginning of his dream's realization and for what would become my nightmare.

The computer needed a room to grow in. We moved.

As the year rolled along, computer stuff started to arrive by United Parcel. With the arrival of each new package I felt vague fadings of someone I'd known and loved. He disappeared into his computer cave for days, coming out only for food and water. On occasion, I'd pop my head into the sanctuary to discover him, buried in stacks of circuit boards, rolls of solder wire, and flying ICs, grumbling and cursing.

I became lonely and terrified of what might be happening in there. And I said so. But my friend didn't hear me. So I consoled myself, hoping that the madness would soon end, at least for a time, until the next parcel arrived.

But my friend had troubles of his own and solicited outside help. The incredible response to his pleas for aid astonished me. I couldn't believe there were more like him. I found myself jostled about in a traffic jam — in my own home. They came and went at all hours of the day or night. The telephone rang continually. In desperation for contact with the real world, I ordered another phone for my own use.

Cowering into the corner of my sofa, I turned up the volume of the television set. And gnashed my teeth.

Packages continued to come. He went down into the cave. Strangers arrived, then left. Sometimes he stuck his head out to holler, "It works!" or something like that. I think he was talking to me. At that point I'd have listened to him say anything.

Little did I know that once all this madness ended and the computer was working, it would truly be the beginning of a different sort of life for him. I no longer recognized him. It's really sad, though he thinks he's pretty happy. Dream fulfilled, and all that, you know. When he gets home from work, all strung out, he goes straight to the computer cave for a fix. I can tell he's hooked - after he gets down there I see the room lights go on, hear a rat-a-tat-tat of switches, and that now familiar "ahhhhh" of relief emanating from the room.

So? you say ... he seems to be happy, and no one has been hurt. Hah! You oughta see what he goes through to support his habit. Why, he'll do programming for abso-

lutely anybody, just to earn extra money for new computer goodies. He programs and flicks switches any time of the day or night. He hasn't opened his mail in so long that his mother called the other day to find out if he's still living. People are really worried about him. They can't help noticing his glazed look. His usual response to their attempts at conversation is an effort at recruiting their interest in computers. So conversations fade. He hasn't noticed that they've walked away, their heads shaking.

He isn't aware of the number of bill collectors who've called. He doesn't even know who they are, because he forgets to open his mail. It just sits there in big stacks on his desk. There's no more room, so the stuff is starting to collect around his desk on the floor. He remains unaware as he gropes in desperate haste for needed diskettes, or paper tapes, or cassettes, through those nasty stacks of paper.

I'd thought of moving to an environment more suitable, but alas, staying here is like living aone. So why bother. It's just that he now talks to me in hexadecimal ... I think he's talking to me ... and I am grateful for the company, Occasionally I stick my head in the entrance of the computer cave. You know, just to see if he's still with us, so to speak. What I find is a rambling stream of conversation already in progress - with the computer. He doesn't even know I've been there.


It isn't only that our relationship has faded to merely existing in the same house. His face has become drawn and pasty. His eyes look like ones and zeros, and his hands have gone completely digital. One would naturally want to help a friend who's become hooked on a habit to the point that his erstwhile energetic way of life has gone on without him. I've been searching my conscience lately, wondering if sometime back I could have averted this disaster. No, I've concluded, there was no way for me to know. I've never known a computer junkie before, so didn't recognize the danger

Continuing to explore my conscience, I hope to help him, even now. There are all those debtors, the IRS, the neglected friends and relatives. Should I make excuses for him socially? Should I open his mail and take care of its demands? Should I threaten to leave him? Would it matter?

I can hear him now. Screams coming from the cave. Sounds something like, "I hate octal . . . why would anyone program in octal?"

If any of you who read this recognize symptoms similar in your own friends, please be warned early. There is danger. Contact me so we can talk about it. Maybe we victims of computer junkies could get together and find solutions ... to help ourselves. Surely my friend, the computer junkie, is beyond help. He seems so happy.

KB BOOK NOOK



become quickly acquainted with the terminology and nomenclature of a new revolution in computer control capabilities in areas that pervade most of man's daily activities.

Over 5000 definitions and explanations of terms and concepts (704 pages) relating to microprocessors, microcomputers and microcontrollers. There are also separate appendices on: programmable calculators; math and statistics definitions; flowchart symbols and techniques; binary number systems and switching theory; symbol charts and tables; summaries of BASIC FORTRAN and APL. In addition

● BRAND NEW DICTIONARY This new microcomputer dictionary fills the urgent need for all computer people, engineers, scientists, industrialists, communications people — as professionals, amateurs, teachers, or students — to

there is a comprehensive electronics/computer abbreviations and acronyms section. \$15.95.

COMPUTER PROGRAMMING HANDBOOK by Peter Stark. A complete guide to computer programming and data processing. Includes many worked out examples and history of computers. \$8.95

● MY COMPUTER LIKES ME ... WHEN I SPEAK BASIC An introduction to BASIC ... simple enough for your kids. If you want to teach BASIC to anyone quickly, this booklet is the way to go. \$2.00.

• SCELBI'S GALAXY GAME FOR THE "8008"/"8080" Here's a new twist in computer games by Scelbi Computer Consulting and Robert Findley. The game, "Galaxy", pits the operator of a spaceship against alien craft, as well as variables such as speed, time and ammunition. No two games are the same! This game is described in Galaxy Game for the 8008/8080, published by Scelbi Computer Consulting, Inc. \$14.95.

• SCELBI'S GALAXY GAME FOR THE "6800" Here's a new twist in computer games by Scelbi Computer Consulting and Robert Findley/Raymond Edwards. The game, "Galaxy" pits the operator of a spaceship against alien craft, as well as such variables as speed, time, and ammunition. No two games are the same! This game is described in Galaxy Game for the 6800, published by Scelbi Computer Consulting, Inc. \$14.95

• 6800 SOFTWARE GOURMET GUIDE & COOKBOOK If you have been spending too much time developing routines for your 6800 microprocessor, try the new book by Scelbi Computing and Robert Findley. This manual, 6800 Software Gourmet Guide and Cookbook described sorting, searching, and many other necessary routines for the 6800 user. \$9.95.


●8080 SOFTWARE GOURMET GUIDE AND COOKBOOK If you have been spending too much time developing simple routines for your 8080, try this new book by Scelbi Computing and Robert Findley. This manual, 8080 Software Gourmet Guide and Cookbook described sorting, searching, and many other routines for the 8080 user. \$9.95

● CMOS COOKBOOK by Don Lancaster, pub. Howard W. Sams Company. Another winner from Don Lancaster, author of the famous RTL and TTL Cookbooks. The CMOS Cookbook details the application of CMOS, the low power logic family suitable for most applications presently dominated by TTL. The book follows the style of the original Cookbooks. Eight chapters cover all facets of CMOS logic, and the work is prefaced by 100 pages detailing the characteristics of most CMOS circuits. The CMOS Cookbook is required reading for every serious digital experimenter. \$9.95

● HOBBY COMPUTERS ARE HERE If you (or a friend) want to come up to speed on how computers work ... hardware and software ... this is an excellent book. It starts with the fundamentals and explains the circuits, the basics of programming, along with a couple TVT construction projects, ASCII-Baudot, etc. This book has the highest recommendations as a teaching aid for newcomers. \$4.95







• SCELBI'S FIRST BOOK OF COMPUTER GAMES Need a game for your 8008 or 8080 microprocessor? Try Scelbi's First Book of Computer Games for the 8008/8080 which described three popular games, "Space Capture", "Hexpawn", and "Hangman". Complete flowcharts, logic description, program listing, and instructions are provided. A must for the game freak! \$14.95.

●THE STORY OF COMPUTERS by Donald D. Spencer is to computer books what *Dick and Jane* to novels . . . extremely elementary, gives the non-computerist a fair idea of what the hobbyist is talking about when he speaks computer lingo. Attempts to explain what computers are and can do to a spouse, child or any un-electronics-minded friend. \$4.95.

● MICROCOMPUTER PRIMER by Mitchell Waite and Michael Pardee, pub. by Howard W. Sams Company. If you are afraid to get involved with microcomputers for fear of not understanding them, worry no longer! The MICROCOMPUTER PRIMER describes basic computer theory, explains numbering systems, and introduces the reader to the world of programming. This book does not elaborate on specific systems or chips, but describes the world of microcomputing in "real world" terminology. There is probably no better way of getting involved with the exciting new hobby of microcomputing. \$7.95

INTRODUCTION TO MICROPROCES-SORS by Charles Rockwell of MICROLOG Here is an ideal reference for the individual desiring to understand the hardware aspects of microprocessor systems. This book describes the hardware details of computer devices in terms the beginner can understand, instead of treating the micro chip as a "black Addressing schemes, registers, control, and memory are all explained, and general information about hardware systems is provided. Specific systems are not described and programming is only briefly discussed. Introduction To Microprocessors is a hardware introduction ... and a good one. \$17.50 US and Canada, \$20 elsewhere.

● THE NEW HOBBY COMPUTERS! This book takes it from where "Hobby Computers Are Here" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards, a Baudot monitor/editor system, an audible logic probe for finding those tough problems, a ham's computer, a computer QSO machine . . . and much, much more! Everything of interest is there in one volume, ready to be enjoyed by you. \$4.95.

BOOK NOOK





Test Equipment Library

• VOL. I COMPONENT TESTERS Build your own test equipment and save a bundle (and have a lot of fun). Volume I of the 73 Test Equipment Library shows you how to build and use transistor testers (8 of 'em), three diodes testers, 3 IC testers, 9 voltmeters and VTVMs, 8 ohmmeter, 3 inductance meters, and a raft of other gadgets for checking temperature, crystals, Q, etc. \$4.95

● VOL II AUDIO FREQUENCY TESTERS If you're into audio ... such as digital cassette recording, RTTY, Baudot vs ASCII, SSTV, SSB, Touchtone or even hi-fi ... you'll want to have this book full of home built test equipment projects. Volume II \$4.95

VOL. III RADIO FREQUENCY TESTERS This is of more interest to hams and CBers ... test equipment you can build for checking out transmitters and receivers: signal generators, noise generators, crystal calibrators, GDOs, dummy loads . . . things like that. This is Volume III of the 73 Test Equipment Library \$4.95

• NOVICE STUDY GUIDE This is the most complete Novice study guide available. It is brand new. This is not only invaluable for anyone wanting to get started in amateur radio, but also it is about the only really simple book on the fundamentals of electricity and electronics. And without your fundamentals down pat, how can you go on to really understand and work with computers? First things first. \$4.95

• GENERAL CLASS STUDY GUIDE This book takes over on theory where the Novice book leaves off. You'll need to know the electronic theory in this to work with computers and you'll not find an easier place to get the information. It will also make getting your Tech or General license a breeze . . . then you can get on

the ham repeaters and interconnect your micro with others. \$5.95


• VHF ANTENNA HANDBOOK The NEW VHF Antenna Handbook details the theory, design and construction of hundreds of different VHF and UHF antennas ... a practical book written for the average amateur who takes joy in building, not full of complex formulas for the design engineer. Packed with fabulous antenna projects you can build. \$4.95

•WEATHER SATELLITE HANDBOOK Simple equipment and methods for getting good pictures from the weather satellite. Antennas, receivers, monitors, facsimile you can build, tracking, automatic control (you don't even have to be home). Dr. Taggart WB8DQT \$4.95

SSTV HANDBOOK This excellent book tells all about it, from its history and basics to the present state of the art techniques. Contains chapters on circuits, monitors, cameras, color SSTV, test equipment and much more. Hardbound \$7,

Softbound \$5

• RF AND DIGITAL TEST EQUIPMENT YOU CAN BUILD RF burst, function, square wave generators, variable length pulse generators — 100 kHz marker, if and rf sweep generators, audio osc, af/rf signal injector, 146 MHz synthesizer, digital readouts for counters, several counters, prescaler, microwavemeter, etc. 252 pages. \$5.95





•WHAT TO DO AFTER YOU HIT RETURN PCC's first book of computer games . . . 48 different computer games you can play in BASIC . . . programs, descriptions, muchly illustrated. Lunar landing, Hammurabi, King, Civil 2, Qubic 5, Taxman, Star Trek, Crash, Market, etc. \$8.00.

● 101 GAMES IN BASIC Okay so once you get your computer up and running in BASIC, then what? Then you need some programs in BASIC, that's what. This book has 101 games for you, from very simple to real buggers. You get the games, a description of the games, the listing to put in your computer and a sample run to show you how they work. Fun. Any one game will be worth more than the price of the book for the fun you and your family will have with it. \$7.50.

 BASIC by Bob Albrecht, etc. Self-teaching guide to the computer language you will need to know for use with your microcomputer. 324 pages. This is one of the easiest ways to learn computer programming. \$4.95

●TVT COOKBOOK by Donald Lancaster, describes the use of a standard television receiver as a microprocessor CRT terminal. Explains and describes character generation, cursor control and interface information in typical, easy-to-understand Lancaster style. This book is a required text for both the microcomputer enthusiast and the amateur RTTY operator who desires a quiet alternative to noisy teletype machines. \$9.95


● TTL COOKBOOK by Donald Lancaster. Explains what TTL is, how it works, and how to use it. Discusses practical applications, such as a digital counter and display system, events counter, electronic stopwatch, digital voltmeter, and a digital tachometer. 336 pages; $5\frac{1}{2} \times 8\frac{1}{2}$; softbound. \$8.95

Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to Kilobaud Book Dept., Peterborough NH 03458. Be sure to include check or detailed credit card information. Note: Prices subject to change on books not published by 73 Magazine.



• AN INTRODUCTION TO MICROCOMPUTERS, VOLS, 1 AND 2 At last! Someone has finally written a book containing hardware details about most of the popular micro chips available to computerists. An Introduction to Microcomputers, Volumes 1 and 2, by Adam Osborne Associates, are references dealing with microcomputer architecture in general and specifically with details about most of the common chips. These books are not software-oriented, but are invaluable for the hobbyist who is into building his own interfaces and processors. Volume 1 is dedicated to general hardware theory related to micros, and Volume 2 discusses the practical details of each micro chip. (Detailed review in Kilobaud #2) Published by Osborne Associates, \$7.50 each.

● 8080 PROGRAMMING FOR LOGIC DESIGN Here is an ideal reference for the person desiring an in-depth understanding of the 8080 processor. The work is application-oriented, and the 8080 is discussed in light of replacing conventional, hard-wired logic systems. Both hardware and software is described. Practical design considerations are provided for the individual wishing to implement an 8080-based control system. (Detailed review in Kilobaud #1) Published by Osborne Associates, \$7.50.



- 6800 PROGRAMMING FOR LOGIC DESIGN Oriented toward the industrial user, this book describes the process by which conventional logic can be replaced by a 6800 microprocessor. Both hardware and software techniques are discussed, as well as interface information. This reference, and its companion dedicated to 8080 users, provide practical information that allows an experimenter to design a complete micro control system from the "ground up." An excellent reference! Published by Osborne Associates, \$7.50.
- THE UNDERGROUND BUYING GUIDE Here is a handy guide for the electronics enthusiast. Over 600 sources of equipment and literature are provided; some are mail-order-only outfits that do not advertise. Sources are listed alphabetically, by service or product, and by state. The guide is cross-referenced for ease of use. Electronic publishing houses are also listed. Published by PMS Publishing Co., \$5.95 each.

Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to Kilobaud Book Dept., Peterborough NH 03458. Be sure to include check or detailed credit card information. Note: Prices subject to change on books not published by 73 Magazine.

BOOK NOOK EARN \$360!

SAVE PLENTY

The newsstand price is \$2 per copy ... back issues go for \$3 ... and a subscription costs only \$15 for a year, a saving of \$9 over the single copy price. You get an even better saving on a three year subscription at \$36 for the 36 issues . . . that's only \$1 per issue!

You know that 'flation is going only "in" and not "de", so prices will be going only up. Paper is going up, postage, salaries, the works. By next year Kilobaud will probably be \$18 a year ... then \$20 ... etc. Grab a subscription at these low rates and laugh at late comers.

\$36 saved is \$36 earned ... no, make that about \$360 earned, because few of us end up with much more than 10% of our income in our

FIRST ON YOUR BLOCK

Get first crack at the special offers in the Kilobaud ads by being sure you get your copy as early as possible . . . by subscription. Unless you pop down to your local (if you have one) computer store every day, you are going to be a bit behind everyone else in seeing what is in the new issue of Kilobaud. If you don't mind the drive . . . the time it takes ... and spending the extra buck ... you need some good psychological counseling. Doesn't it get you when a friend refers to an article in Kilobaud and you haven't gotten your magazine yet? Subscribe and be happy.

A MISSING COPY

Judging from some of the frantic calls from computer stores wanting back issues or more of the current issues, there are some computerists out there who are having a hard time because they have not yet subscribed. Kilobaud is now the best selling computer hobby magazine in the stores . . . by quite a margin . . . and that means there is a good chance that it will be gone by the time you get there. Too bad. Maybe you'll catch their next shipment. Maybe you'll screw up and miss out entirely

and end up paying \$3 for it as a back issue . . . that's happening to a lot of fellows. With some added lack of dilligence you could run the yearly tab for Kilobaud from \$24 to \$30 or so just by being in the right place at the wrong time. Subscribe.

KILOBAUD'LL BE BETTER

Keep in mind that no magazine had ever before published the type of articles in Kilobaud ... it's a whole new concept ... computer articles not written in computer language, but written for newcomers to the field. More and more of the top writers are getting excited about this concept and sending in great articles. Subscribe.

Sure, we could spend a lot of time and money on gaudy artwork and distracting color layouts ... but wouldn't you rather have more money go to the writers so they can buy more stuff to work with and write about? Kilobaud'll try to keep it simple and straight forward and leave the paint pots to others.

HOW TO SUBSCRIBE

We try to keep it easy. You can even call in your subscription and order it with your credit card ... Master Charge, BankAmericard, or American Express. We'll start with the current issue. If you've missed any past issues you can order them (\$3 each) and they'll be sent right out. See the toll free 800 number on the coupon below.

It is not necessary to shred your magazine to subscribe . . . just make a copy of the coupon or put the needed info on a separate piece of paper . . . we'll go along with almost anything. Send cash, check, money order ... charge card number ... something we can use to placate the

☐ 1 ye Please	l want to subscribe to KILOBAUD. ear — \$15	
Card #	*US & Canada ONLY! Others write for foreign rates Card # Interbank #	
	tion dateSignature	
Name.	sssignaturesignature	
Name . Addre		
Name . Addre	ss	
Name . Addre	ss State Zip	





"Time to go home. I've just computed that the Cowboys will win by 6 points."

BEST Computer Mailing List

By far the most complete mailing list available is the KILOBAUD list of DEALERS, CLUBS, PUBLICATIONS and MANUFACTURERS. (It's the one we use for our mailings and we update it daily). The list has over 1000 names painstakingly gathered from manufacturers, magazine ads and new product releases, hobby computer shows and direct mail. You can buy this list printed on self-sticking labels for only \$50.

Additional printouts, once you are a customer, are \$35. Call in your order with charge information (BAC, AMEX, MC). Our toll free number for these orders is (800) 258-5473.

NEW FIRMS, DEALERS, CLUBS ... be sure we have your name, address, phone number and as much data as possible for this listing.

Kilobaud Peterborough Nh 03458 KB/6/77

CORRECTIONS

There are three errors in my article, "Welcome to Assembly Language Programming," (January). One is a simple typo. The seventh instruction in Program G should be SBB H. The other two errors are the same. DCX H does not set any flags! If the fifth instruction in Pro-

gram F is changed to JMP LOOP that program will run as advertised. In Program G the 12th instruction should be changed to DCR E but now the program can clear no more than #129 bytes.

Mike Aronson Oregon City OR In "Beware the Wumpus" (February) the following corrections to the program listing: Line 20 should be ---- IFLEFT\$(I\$,1)="Y" ----; Line 2050 should end ---- 2100,2100 ---- deleting the 00 that follows; Line 2440 should delete the T at the end of the line; Line 4280 should be ---- ORL=L(6) ----.

Please note also that another Wumpus (Greg Yob's) was originally published in the *PCC Newspaper* (Vol. 2,

#2, Nov 73 and Vol. 3, #3, Jan 74). Our apology for omitting this credit.

In "A Useful Loan Payment Program" (February, page 68), line 16 of the program listing in Fig. 1 should be 200 C=(1+R)↑M.

In "A 6800 Single Stepper" (February, page 132), the IC1 in Fig. 1 is a 7400 Quad NAND gate and the resistor is a 1k Ohm ¼ Watt resistor.

We Just Can't CRAM it ALL in Kilobaud!

cles in 73 ... a lot of them. There are also a lot of articles that computer hobbyists will be needing to read which are not exactly computer articles such as on regulated power supplies . . . on making printed circuit boards ... on how various circuits work ... things like that which hardware men in particular need to read ... and which software people need even more, since they are a bit behind on hardware.

73 is written for the average ham . . . and that means that the level is not PhD by any means. The level of articles in 73 is quite parallel to the level of computer articles in Kilobaud ... and that means that you will be able to understand them and profit from them.

There are computer application articles ... oriented towards hams, of course. Hams also need to understand the basics of computers, so these are also being covered.

During the last year or so there have been over 300 pages of computer articles and nearly as many which are of interest to the average computerist.

Take the March 1977 issue of 73 just as an example. The big feature was a high quality video display with complete cursor control and video control. This was by Don Alexander, the winner of the WACC exhibition last year. This generates upper and lower case, and even Greek letters! 6800 users will be excited about the operating system described in this issue . . . complete with the hex listing . . . which is used right along with Mikbug and greatly increases the flexibility of the system.

There's an article on using ICs

Yes, there are computer arti- age power supply with overcurrent protection ... a capacitor comparator ... the 79MG and 78MG new breed of voltage regulators ... a PROM message generator for RTTY ... how counter ICs works ... a speedy audio counter ... making your own PC boards ... things like

In other recent issues there have been articles on computerized satellite tracking (with software), RTTY using a uP, using old (inexpensive) Teletypes, building a Polymorphice video board, making instant PC boards using the new color-key technique, the TTL one-shot, what computers can and can't do, a hamshack file handler (software), the bit explosion -8-12-16?, backward branch the easy way with the 6800, the hexadecimal . . . etc.

Any one of these articles could easily be worth the cost of a full year of 73. One good program could save you days of work. One good interface project could make an enormous difference. In general, 73 tries to present not too complicated construction projects . . . things you can make in a day or two.

HAM MAGAZINES

There are a number of ham magazines and they all have one thing in common ... hardly anything for the computer hobbyist ... except for 73. 73 has been running an I/O section since early 1976 ... computer articles ... and they are still coming.

One of the fundamental policies is that no articles will be published in both 73 and Kilobaud. This is, in a way, unfair because it keeps some great computer articles away from ... one on a fantastic low volt- computerists. But since about



20% of the readership of the two magazines overlaps, it would be unfair to those getting both magazines to duplicate. You really must get both magazines to keep up to date with what is going on. When you subscribe to both you will not be getting duplication.

73 VS KILOBAUD

Kilobaud has been outstanding because it is so filled with articles of interest. You've probably noticed that you don't finish Kilobaud very quickly ... and that it takes a lot longer than most other hobby magazines. You'll find the same thing with 73. Sure, it is ham oriented ... but remember that ham radio is about 30 different hobbies ... and today that includes computers.


Look at it this way . . . if you decide you don't want to get 73 you can cancel your subscription and get a refund on the unused parts. You will enjoy 73 ... and you might even get sucked into hamming ... you could do worse

SPECIAL FOR KILOBAUD SUBSCRIBERS

The newsstand price is \$2 per copy ... that's \$24 a year. The regular subscription rate is \$15 for a year. If you are already a subscriber to Kilobaud then you are eligible for the special \$12 for one year subscription to 73 ... U.S. and Canada only. This offer is limited and will probably not be repeated once we take a good look at the increased postage and printing bills. Take advantage of us while we are in a weak moment . . . subscribe.

ALE PRICE SPECI

Name	half the newsstand price just \$12.00 Call (if any)
Address	
City	State Zip
\$12 enclosed. Cash	☐ Check ☐ Money Order
Bill: Master Charge	☐ BankAmericard ☐ American Express
Card #	Interbank # (MC)
Signature	Expiration date
☐ Bill me direct	Allow 6 weeks for subscription processing.
Toll Free S	ubscription Numbers: (800) 258-5473
N	JH & Nights (800) 251-6771
72 MACA	ZINE PETERBOROUGH NH 03458 KB/6/77

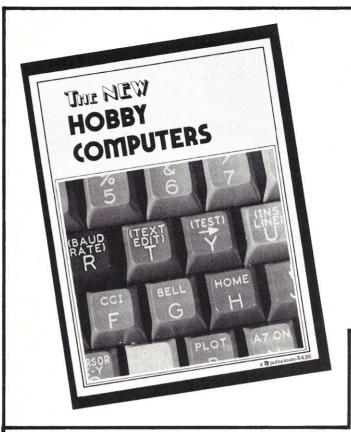


THE NEW HOBBY COMPUTERS

This book takes it from where "Hobby Computers Are Here" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards, a Baudot monitor/editor system, au audible logic probe for finding those tough problems, a ham's computer, a computer QSO machine . . . and much, much more! Everything of interest is there in one volume, ready to be enjoyed by you. Don't miss this tremendous value! Only \$4.95.

HOBBY COMPUTERS ARE HERE

helps the beginner get into the world of microcomputers. Some chapters: What's a Computer?, Is Digital New?, How Computers Figure, Computer Languages, How Gates Work, TTL — Best Logic Yet, Ins and Outs of TTL, Flip-Flops Exposed, New Cassette System Standard, Build this TVT, Using Surplus Keyboards, Morse to RTTY Converter, ASCII to Baudot via a PROM, PLUS reprints of some of the 73 editorials on computers. Don't miss out any longer on the fun of hobby computing and the fantastic applications of these incredible devices! \$4.95.



"It's the first book I've ever read about computers that I can understand. . ."

Please send me: The New Hobby Computers @ \$4.95	
Hobby Computers Are Here! @ \$4.95	
Total order \$	
\$enclosed. Cash Check Money order	
Bill: ☐ Master Charge ☐ BankAmericard ☐ American Express	
Card # Interbank #	
Expiration date Signature	_
Name	_
Address	_
City State Zip	_
magazine Dept. HC Peterborough NH 03458	KB/6/77

COMPUTERISTS'. look what you've missed 73's 1/0 section each month is full of computer articles . . .

Eight Trace Scope Adapter The PROM Zapper Sneaky Baudot Simple Graphics Terminal

OCTOBER 1976 I/O SECTION

RTTY/uP Flexibility Blowtorch Your ICs How to Interface a Clock Chip Hey, Look What My Daddy Built! A TTL Tester How to Check Memory Boards The New Ham Programmer The Soft Art of Programming Part I BASIC? What's That?

NOVEMBER 1976 I/O SECTION

Ham Time-Sharing is Here for You! The Soft Art of Programming - Part II OSCAR Orbits on Your Altair ASCII/Baudot Converter for Your TVT Baudot to ASCII Baudot and BASIC

DECEMBER 1976 I/O SECTION

A Ham's Computer - CW/RTTY the easy way What's All This LSI Bunk? - an ostrich's eye view of the microprocessor

The Soft Art of Programming - Part III Getting By the Friden-8800 Communications Gap - interface made easy

What's All This Wire-Wrap Stuff? - talk about cold solder joints!

HOLIDAY 1976 I/O SECTION

What Computers Can and Can't Do - a look at amateur radio's future possibilities

A Ham Shack File Handler — program in BASIC for QSL's, repeaters, etc.

Print Your Own Log Book - on your nearest computer The Bit Explosion - 8vs. 12vs. 16vs.? Backward Branch the Easy Way - for the 6800 Superprobe - modern replacement for the scope The Frumious Hexadecimal - for 16-fingered folk

JANUARY 1977 I/O SECTION

Go Forth and Multiply! How to Find a Forgetful Memory A Super Log Short On Memory? A Software Replacement for the Muffin Fan 1.000 WPM Morse Code Typer It Works! The First Time!

FEBRUARY 1977 I/O SECTION

Computerized Satellite Tracking - the needed software Building The Polymorphics Video Board - the voice of experience

RTTY Goes Modern - using microprocessors How to Use Those Old Teletypes - computer operation with a 60 mA machine

FEBRUARY 1976 I/O SECTION

ASCII to Baudot Converter The Sound of Random Numbers What Do You Want to Count? RTTY Autocall - The Digital Way Believe Me - I'm No Expert!

MARCH 1976 I/O SECTION

What's a Computer? The IC See-er Build This Exciting New TVT Magic Fingers for RTTY What's That In Binary?

APRIL 1976 I/O SECTION

Computers Are Ridiculously Simple! A Versatile TTY Generator

MAY 1976 I/O SECTION

Computer Languages — Simplified A Very Cheap I/O - The Model 15 Code Converter Using PROMs A Nifty Cassette-Computer System Is Digital All That New? The Ins and Outs of TTI. Build a CW Memory

JUNE 1976 I/O SECTION

Two Finger Arithmetic - How computers figure Those Exciting Memory Chips — RAMs, ROMs, PROMs A Morse to RTTY Converter — using a microprocessor Number Systems - a brief history ASCII/Baudot with a PROM - for ribbonless RTTY or Computers

Aim Your Beam Right - with a programmable calculator

JULY 1976 I/O SECTION

Power Supply Testing - to save your digital circuits A RTTY/Computer Display Unit - Baudot, ASCII, TTL, RS232, etc. etc.

Your Computer Can Talk Morse - even a computer can learn code!

Inexpensive Paper Tape System - using a 5 level tape with computers


AUGUST 1976 I/O SECTION

The Which Chip Dilemma! Meaningful Conversations with your Computer A Baudot Monitor/Editor System A Logic Probe You Can Hear How Computer Arithmetic Works Satellite Orbit Predicting The Death of Negative (IBM) Logic ... And on the Other Side ... Build the Safari RTTY Terminal Never Underestimate the NAND

> Limited quantities available. 73 back issues with 1/0 - 1976 - \$2.50 each, 1977 - \$3.00 each. Send check or credit card information.

Back Issues, Kilobaud, Peterborough NH 03458 — U.S. & Canada only.

POWER.

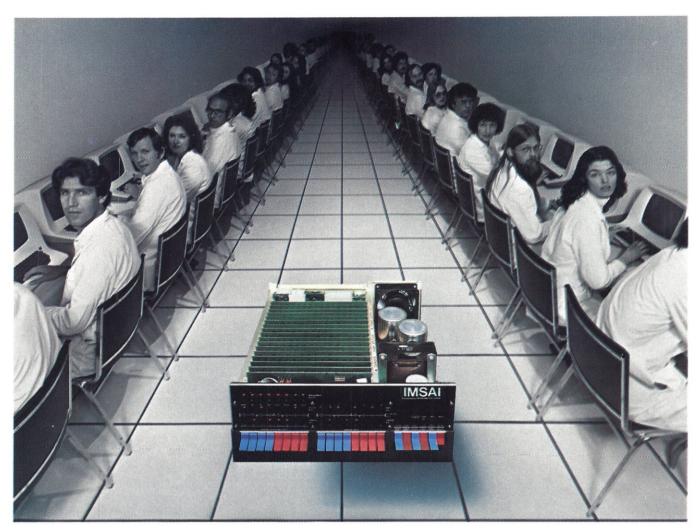

IMSAI Introduces the Megabyte Micro.[™]

The Megabyte Memory

Until today, the largest memory you could fit and address in a single microcomputer CPU was 65K.

Now, IMSAI presents an incredible memory system for micros 16 times more powerful than yesterday's best.

Imagine, a full megabyte of power from sixteen 65K RAM boards.

And, to control all this, the IMSAI Intelligent Memory Manager (IMM), the super control board.

You can write protect blocks throughout the full megabyte. Or, map in 16K blocks. Plus, preset 16 mapping configurations

Plus, preset 16 mapping configurations with protect for high speed transfer or rapid change.

All interrupts are fully vectored, and

All interrupts are fully vectored, and there's an interrupt if an attempt is made to write into protected memory.

There's even a real "time of day" clock.

65K, 32K and 16K RAM Boards

Until today, the most memory you could plug into a single slot was 16K.

Now, IMSAI presents memory boards in astonishing multiples of sixteen: 65K, 32K and 16K low power, dynamic RAM Boards. They can be used in any S-100 bus computer individually or in combination to form conventional systems up to 65K butter.

Every board is fast. With "hidden refresh" and no "wait state."

The Complete Megabyte Microcomputer System

The IMSAI Megabyte MicroTM is only part of the story. The full system can include dual floppy disks, terminals, plotters, printers and tape cassettes.

IMSAI also offers the finest high level and peripheral software available. Paper tape and Tape Cassette I/O and super Disk Operating Systems. Plus, BASIC and Disk BASIC with more high level languages coming.

Until today, the microcomputer's potential was just something you talked about

Now, you can put it to work. Powerfully.

☐ Send 32K RAM Board K ☐ Send 16K RAM Board K ☐ Send IMM ROM Contro	
#	Exp. Date:
Sig	
Send name of my nearest	t IMSAI dealer
Name	
Company	Title
Address	
City	
State/Zin	

IMSAI Manufacturing Corporation 14860 Wicks Blvd. San Leandro, CA 94577 (415) 483-2093 TWX 910-366-7287

ability.

It Comes Naturally With The Altair™ 8800b

The Altair 8800b from MITS: the second generation design of the microcomputer that ities everyone is demanding from microcomputers today:

Expand-ability:

The Altair 8800b power supply and onepiece. 18-slot motherboard allow efficient and easy expandability for memory and I O options. All Altair PC boards are designed to give you maximum capability lowest power usage possible per board. This means that for each slot used you get more features and require less power, than with any of the "offbrand" Altair-bus-compatible boards

Whether you buy an entire system up front or choose to expand gradually, it's easy to get the configuration you need with the complete family of Altair peripheral equipment.

floppy disk, line printer, audio cassette record converter. PROM programmer, serial and

choice of four different memory boards and many others

Reli-ability:

The unique design features of the Altair 8800b, which have set the standard for the reliable unit of its kind. The Alfair 100-pin bus. the now-standard design used by many imitators, has been "standard" all along at MITS. The unique Front Panel Interface Board on the Altair 8800b isolates and filters front panel noise before it can be transmitted to the bus. The all-new CPU board utilizes the 8080A microprocessor, Intel 8224 clock generator and 8216 bus drivers

Flex-ability:

Meeting the diversified demands of an everincreasing microprocessor market requires including the innovative Altair BASIC lan-

length strings with LEFT\$, RIGHT\$, and MID\$

and double precision variables, automatic defined string functions. PRINT USING for forinclude IF. THEN ELSE, LIST and DELETE program lines. SWAP variables and Trace On and Off for debugging

Extended BASIC with the additional capaaccess disk files. Utilities are provided for

ease and efficiency of BASIC for the solution of real world problems.

ment system for the Altair 8800b, includes

Afford-ability:

Prices for the Altair 8800b start at

For a complete listing of prices on all Altair products and a free bro-

